



Engineering Flow Solutions

BOREHOLE SUBMERSIBLE PUMPS

HMS Ciris

TECHNICAL CATALOGUE



CONTENTS

HMS CIRIS PUMPS: GENERAL DESCRIPTION

Application.....	2
Operating conditions.....	2
Technical data	2
Design features: submersible pumps	2
Design features: submersible motors.....	2
Reliability.....	3
Performance range	3
Pump series designation.....	3
Features, Advantages, Benefits	4
General assembling drawing: submersible pump	5
General assembling drawing: submersible motor.....	6
Material selection	7

PUMP SELECTION AND OPERATION GUIDELINE

Main parameters	8
Duty point.....	9
Pump selection sequence.....	10
Head losses in steel pipes.....	12
Head losses in plastic pipes.....	13
Hydraulic accumulator selection.....	14
Pump installation requirements	15
Pump selection examples.....	16
Operation with variable speed drives.....	20
Operation with frequency inverters.....	21
Typical mistakes in pump selection and operation	21

PERFORMANCE CURVES AND DIMENSIONS

HMS CIRIS 6"	24
HMS CIRIS 8"	37
HMS CIRIS 10"	46
HMS CIRIS 12"	55

ACCESSORIES

Pipe adapters	60
Thread adapters	61

REWINDABLE SUBMERSIBLE MOTORS. DAP SERIES

62

PUMP CONTROL PANELS

HMS Control L2 Series. Panel for a Single Pump	64
HMS Control L3 Series. Panel for a Single Pump with Extended Functions.....	66
HMS Control L4 Series. Panel for a Single Pump with Wireless Connection	68
HMS Control G Series. Panel for a Dranaige Pump	70

CABLE SELECTION

72

ABOUT HMS GROUP

74

REQUEST FOR QUOTATION

75

HMS CIRIS PUMPS: GENERAL DESCRIPTION

The HMS Ciris series is a new generation of the borehole submersible pumps engineered in accordance with the modern requirements to energy efficiency and reliability and taking into account the severe operation conditions with unstable power supply quality.

The pumping unit consists of a centrifugal multistage pump and a rewirable submersible asynchronous electric motor of the DAP series connected by a rigid sleeve coupling. The fluid enters through an inlet located between the pump and the motor, protected by a strainer from the ingress of large mechanical particles.

The HMS Ciris pumps are distinguished by the reinforced critically important parts and components, as well as the main structural elements made of stainless steel, which increases corrosion resistance, significantly reduces the risk of mechanical damage and extends the pumping units operational lifetime in general.

The standard warranty period is defined for 3 years and operational lifetime is specified for 4 years if the pump is operated in accordance with the manual and connected to the power supply via appropriate pump control and protection panel providing necessary features.

APPLICATION

- Drinking and process water supply in industrial, municipal and rural areas
- Irrigation and spray irrigation in agriculture
- Mining industry dewatering and water supply
- Pressure boosting applications
- Groundwater lowering and level maintaining
- Firefighting and sprinkler systems
- Fountains, water storage reservoirs
- Water storage reservoirs

The pumps are equally applicable in vertical position (boreholes, water wells, ground water lowering pits) or horizontal position (water reservoirs, fountains, pressure booster modules, and other systems).

For reliable and continuous break-free operation it is strongly recommended to apply the HMS Control series of the pump control and protection panels to connect the pumps to the power supply.

The HMS Ciris pumps are produced at the largest in Russia borehole submersible pump manufacturing facilities of Livnynasos (HMS Group).


TECHNICAL DATA

Outer pump size range, inches (mm)	6 (145), 8 (189), 10 (235), 12 (281)
Borehole inner diameter, inches (mm)	6 (150), 8 (200), 10 (250), 12 (301)
Capacity range	2.5 – 290 m ³ /h
Pressure head range	15 – 550 m
Motor power range	3 – 130 kW
Motor synchronous rotation speed	3,000 rpm
Motor protection	IP68
Rated voltage	3 x 380 V, 50 Hz
Voltage deviation	-15 % ... +10%
Motor starting method	Direct on-line
Motor starts per hour	below 20
Minimal flow rate for motor cooling	0.2 m/sec

PUMPED LIQUID CHARACTERISTICS

Pumped liquid	• Fresh water (drinking, process) • Chemically active water (sea, mineral)
Liquid temperature	+ 1 ... + 30 °C (optionally up to + 80 °C)
pH factor	5 ... 9.5
Solids content by mass	up to 0.01 %
Solids size	up to 0.1 mm
Total dissolved solids	up to 3 500 mg/l (optionally up to 6,000)

PERFORMANCE RANGE

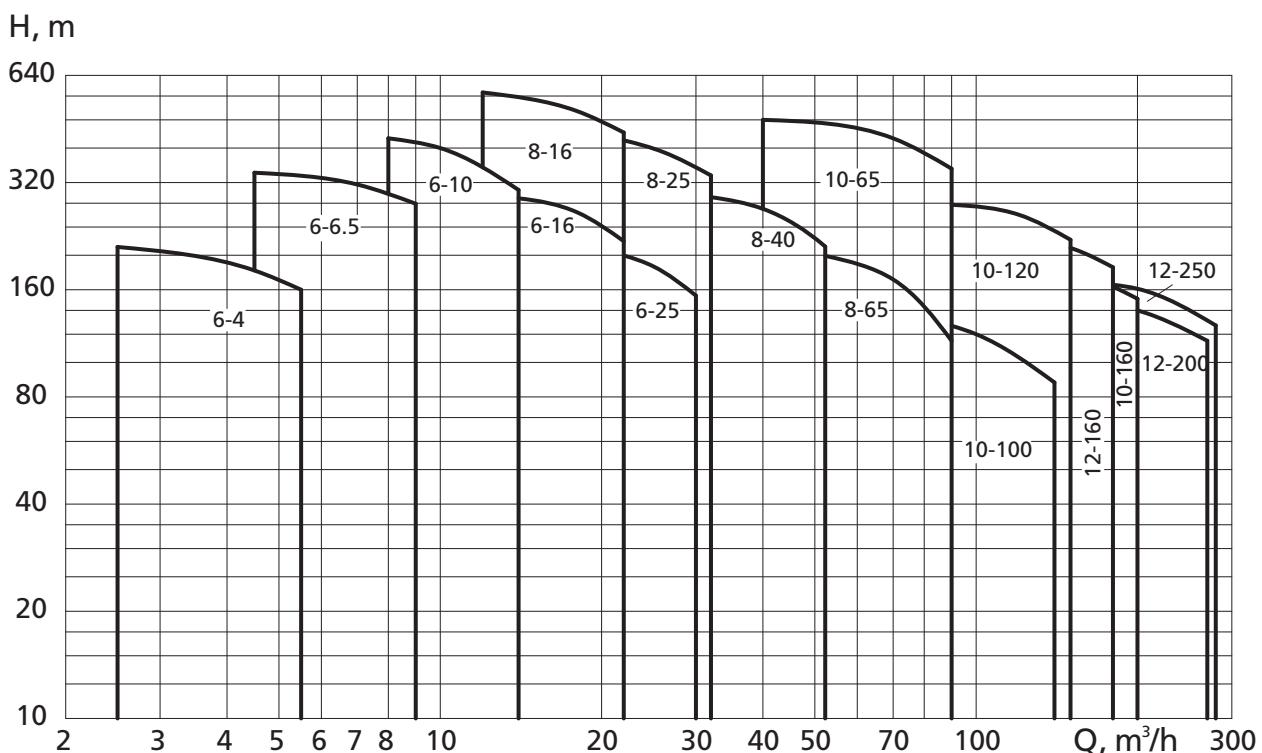

PUMP SERIES DESIGNATION

Designation example:

CRS 8-25/10-22 X ssi

Pump series: HMS CIRIS

Borehole casing inner diameter, inches (1 inch = 25.4 mm)

Rated capacity, m³/h


Number of pump stages

Motor rated power, kW

X – version for handling chemically active water

Material options: **ssi** – stainless steel impellers;
ssp – stainless steel pump (impellers and diffusers)


CRS X - XX / XX - XX X xxx

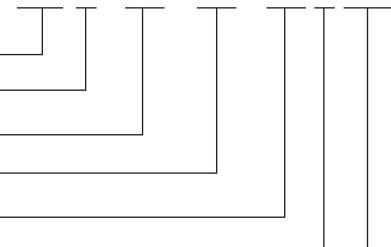

FEATURES, ADVANTAGES, BENEFITS


1. AISI 316 stainless steel straps
2. Built-in non-return valve to prevent water hammer and reverse rotation
3. Octagonal bearings for sand removal
4. AISI 420 stainless steel shaft
5. AISI 316 stainless steel thick-tube stages casings for maximum structural rigidity and damage prevention during installation and corrosion protection of pump stages
6. Patented design of the plastic impellers reinforced with stainless steel notably increases their service life
7. Impellers with hydraulic axial unloading with expeller vanes
8. Built-in strainer on the pump inlet
9. Sand guard for motor protection from the solid particles
10. Mechanical seal isolating internal cavity of the motor from pumped water
11. Radial bearings of advanced composite (graphite-based) materials with helical grooves for better lubrication
12. High temperature insulated winding wire (100 °C)
13. Squirrel cage type rotor made of copper for increased reliability and efficiency
14. AISI 316 stainless steel motor casing
15. Increased length of stator and rotor enhance reliability and improves cooling
16. Reverse thrust bearing prevents rotor's vertical displacement
17. Self-aligning water lubricated thrust bearing ensures trouble-free operation
18. Rubber membrane compensating liquid thermal expansion

- Rewindable electric motors
- Keyed coupling; NEMA coupling is available
- Motors are filled with a liquid allowing contact with potable water and be stored at low temperatures to -30 °C. Motors can be filled with clean fresh water
- 100% of pump units are factory-tested

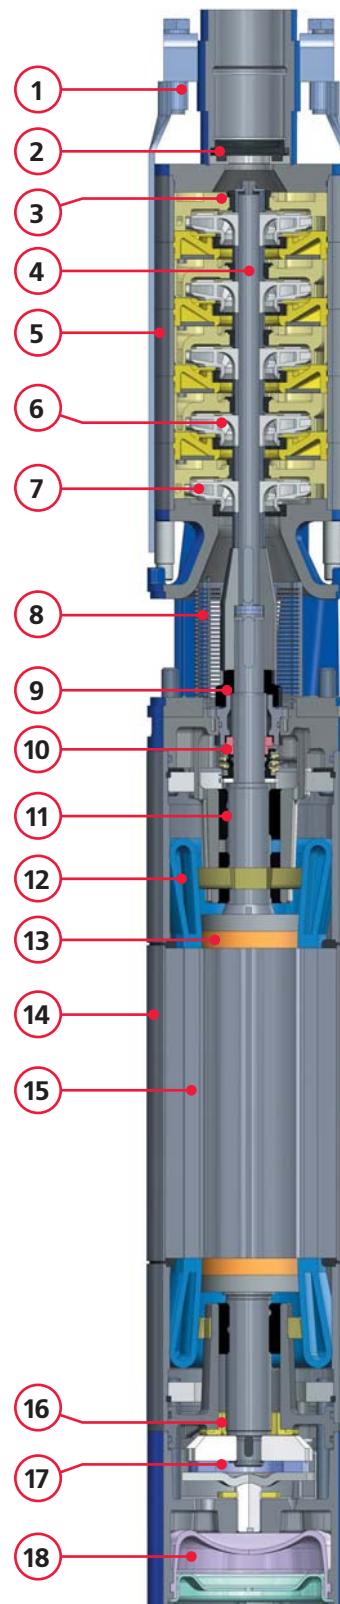


GENERAL ASSEMBLING DRAWING: SUBMERSIBLE PUMP

1. Bolt
2. Washer
3. Strap
4. Shaft
5. Key
6. Spring ring
7. Non-return valve
8. Ring
9. Sealing ring
10. Discharged head
11. Stage casing
12. Ring
13. Bolt
14. Washer
15. Washer
16. Bearing
17. Ring
18. Diffuser
19. Ring
20. Spacer
21. Impeller
22. Diaphragm
23. Wearing ring
24. Diaphragm cover
25. Bushing
26. Diffuser
27. Motor adapter
28. Strainer
29. Key
30. Coupling

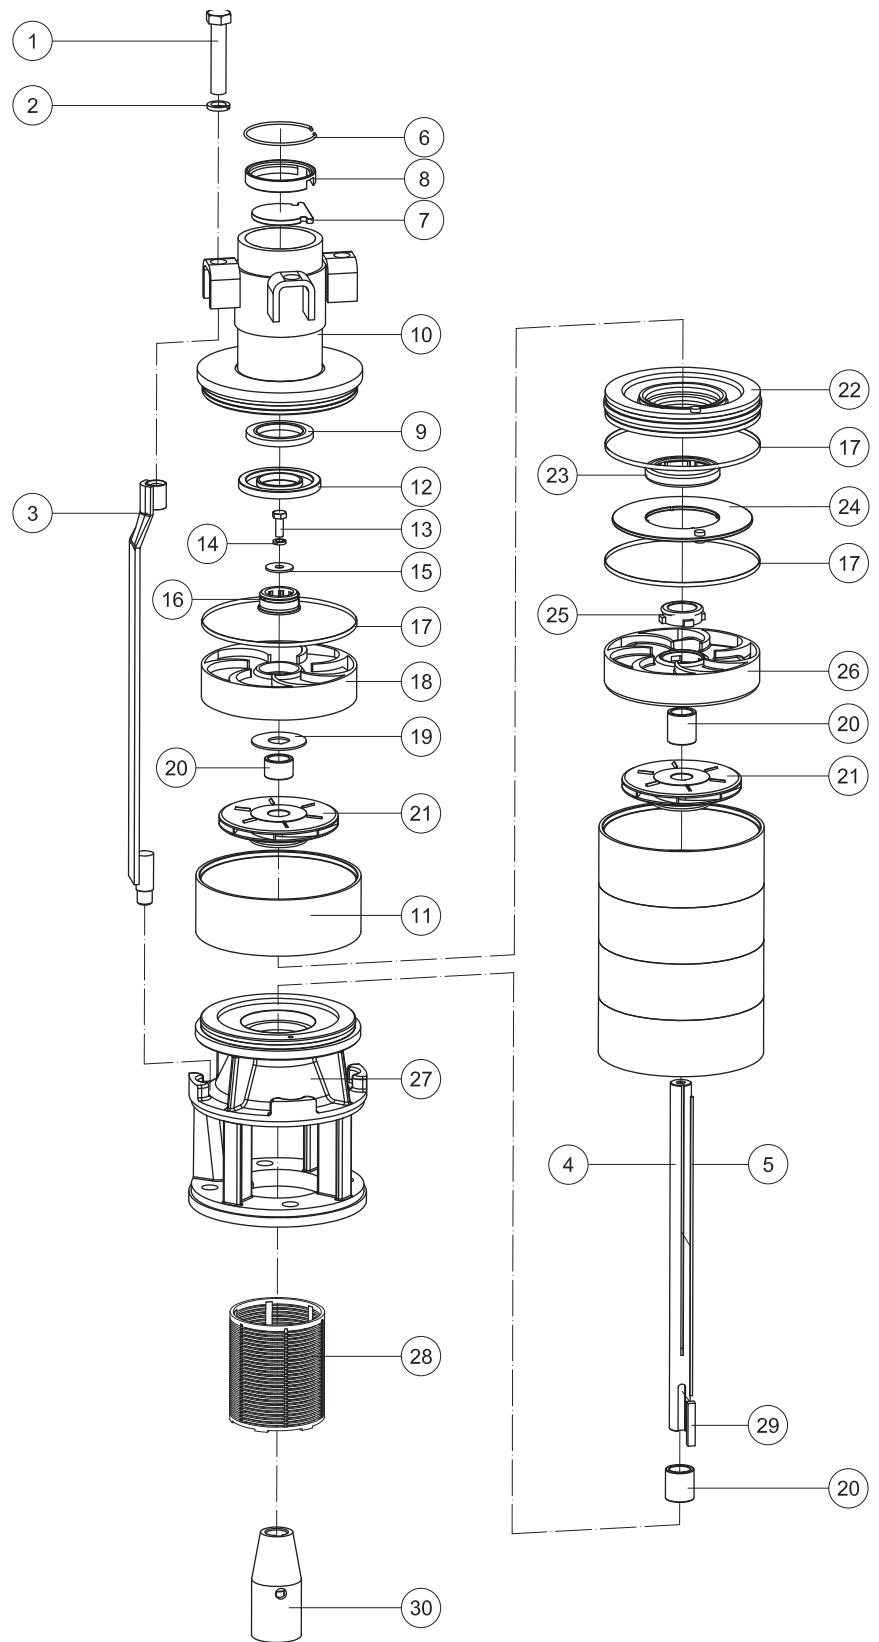

GENERAL ASSEMBLING DRAWING: SUBMERSIBLE MOTOR

1. Lockin ring
2. Diaphragm cover
3. Diaphragm
4. Screw
5. Washer
6. Bottom
7. Screw
8. Washer
9. Revers thrust bearing
10. O-ring
11. Lower bearing casing
12. Ring
13. Winding fixator
14. Sleeve bearing
15. Plug
16. O-ring
17. Upper bearing casing
18. Washer
19. Mechanical seal cover
20. Screw
21. Washer
22. Sand protector
23. Stud sealing
24. Mechanical seal
25. O-ring
26. Cable nut
27. Cable sealing
28. Cable sealing
29. Cable sealing
30. Stud
31. Lock ring
32. Thrust ring
33. Stator
34. Key
35. Rotor
36. Ring
37. Thrust journal
38. Thrust bearing
39. Screw
40. Lock nut
41. Screw
42. Key
43. Plate

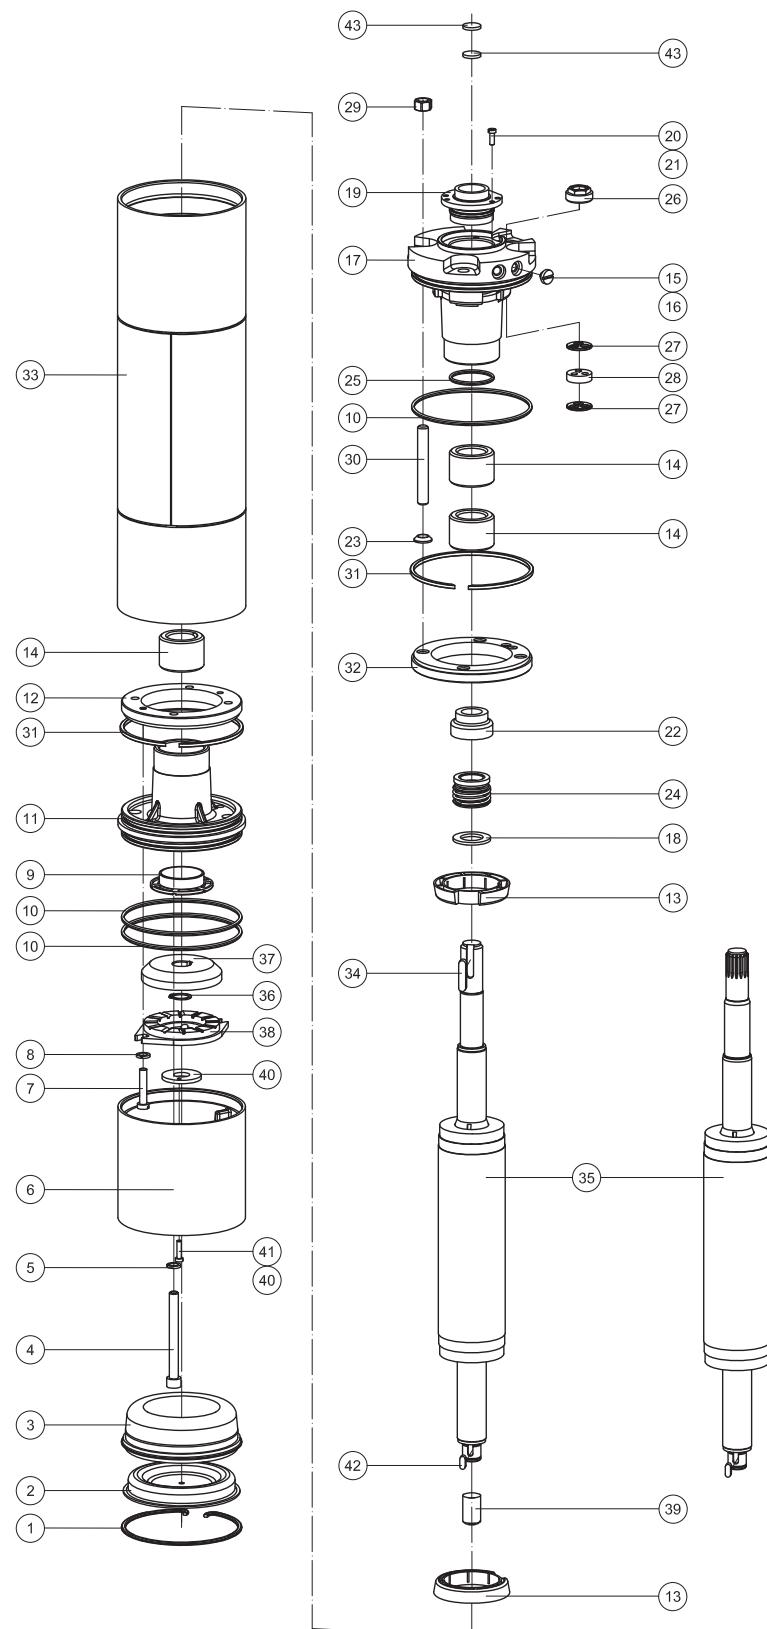

MATERIAL SELECTION

Model	Pump				Motor	
	Impeller	Diffuser	Stage casing	Shaft	Casing	Bearing housing
CRS 6 - 4						
CRS 6 - 6.5						
CRS 6 - 10	Thermoplastic resin armored with stainless steel	Thermoplastic resin				
CRS 6 - 16						
CRS 6 - 25						
CRS 8 - 16	Thermoplastic resin armored with stainless steel	Thermoplastic resin				
CRS 8 - 25						
CRS 8 - 40	Stainless steel; AISI 316	Thermoplastic resin				
CRS 8 - 65	Thermoplastic resin armored with stainless steel	Thermoplastic resin	AISI 316	AISI 420	AISI 316	Cast iron with powder coating
CRS 10 - 65		Thermoplastic resin				
CRS 10 - 100						
CRS 10 - 120						
CRS 10 - 160						
CRS 12 - 160			AISI 316			
CRS 12 - 200						
CRS 12 - 210						
CRS 12 - 250						

PUMP SELECTION AND OPERATION GUIDELINE

The information in this section provides the recommendations on selection, installation and operation of the submersible pumps in the most efficient way, avoiding the most typical mistakes and significantly reducing the number of failures.

MAIN PARAMETERS

The water supply system consists of many elements and the main of them are the pumps, pipes, valves, tanks and reservoirs. Each element influences on others so the whole system

efficiency and reliability depends on consistency of its components operation (Fig. 1).

THE MAIN PARAMETERS OF THE PUMP

- Q-H curve to show head vs. capacity relation
- Q-P curve: power vs. capacity relationship for multistage pumps the curve can be shown for one stage or whole pump
- Efficiency curve to show stage efficiency with taking into account losses in non-return valve and at the pump inlet

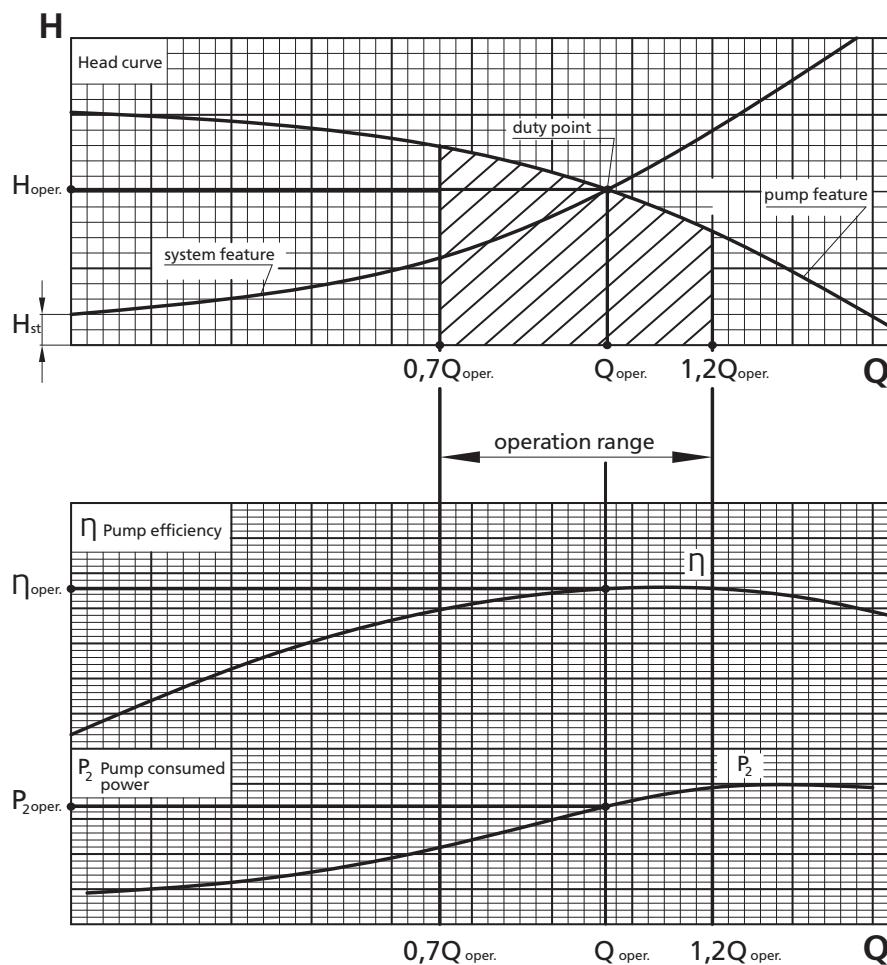


Fig. 1. The pump and the water supply system parameters

WATER SUPPLY SYSTEM PARAMETERS

The water supply system feature shows the relation between its hydraulic resistance and the fluid consumption. The system includes a set of tanks, pipes, valves and filters which the liquid goes through to a pump and from the pump to consumer. Each of these elements has their own hydraulic features that collectively represent the system's feature.

Pumps efficiency is primarily determined by their correct selection, which is with taking into account all process specifics. Therefore, energy efficient operation is based on the best match of pump and system features so the operating point would stay in the performance range of pump.

Finding the operating point within that range provides the most efficient operation. Fulfilling this requirement enables pump operation with high efficiency and reliability.

DUTY POINT

Duty point is determined by intersection of the system and pump curves (Fig. 2). The intersection point is called the duty point. One of the main conditions in a pump selection is to provide the preferred operating range of 70-120% of nominal capacity.

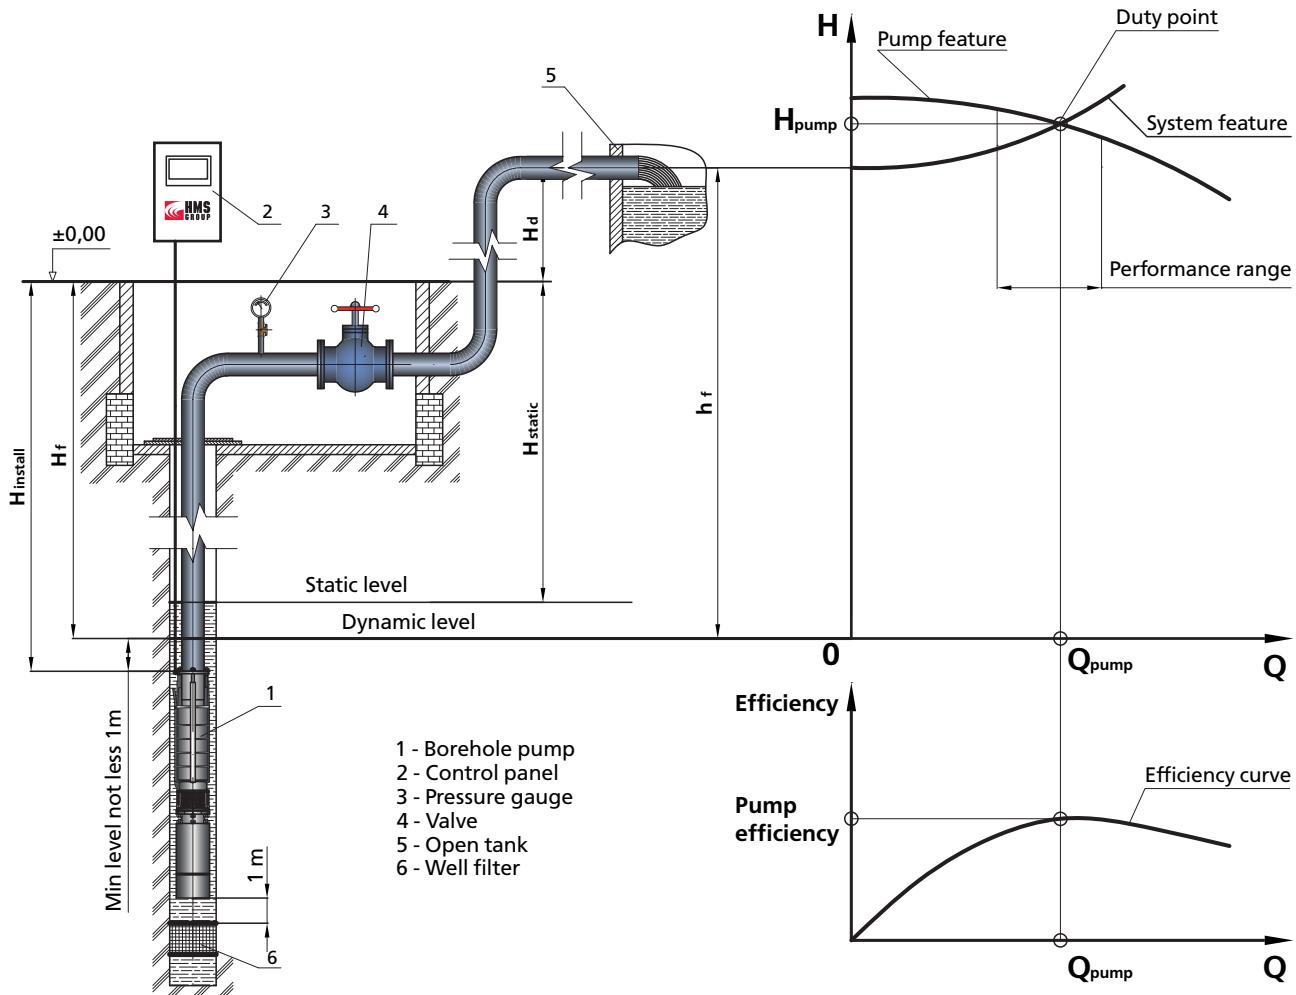


Fig. 2. The pump and the water supply system installation features

PUMP SELECTION SEQUENCE

Initial data

- Required capacity and head values
- Well (borehole) data or ones got by measurement:
 1. Internal well diameter (Tab. 1)
 2. Static water level
 3. Well yield (or output)
 4. Dynamic water level (pumping water level) to correspond with well yield
 5. Well screen/filter depth
 6. Chemical composition and solids content

1-st stage. Determining the pump diameter

Pump diameter shall correspond to the inner diameter of the well albeit the certain min. clearance between motor casing surface and inside well diameter is required (Tab. 2).

2-nd stage. Determining the pump capacity

Pumps shall be selected so that well yield would exceed the nominal capacity by at least 25% (Tab. 3).

Table 1. Corresponding diameters of the borehole pipe casing (well) and pumps

Borehole pipe casing/well inner diameter, not less, mm	98	150	199	250	301
Pump size, inches	4	5,6	8	10	12

Table 2. HMS Ciris pumps nominal capacity range

\emptyset , inches	4				5				6				8				10				10,12		12	
Q , m^3/h	1.5	2.5	4.0	6.5	10.0	6.5	10.0	6.5	10.0	16.0	25.0	16.0	25.0	40.0	65.0	65.0	100.0	120.0	200.0	160.0	210	250		

Table 3. Well yield vs. HMS Ciris pumps nominal capacity range

Well yield, $m^3/hour$	Capacity, $m^3/hour$													
	1	2.5	4	6.5	10	16	25	40	65	100	120	160	210	250
1.3....3	*													
3.....5	*	*												
5.....8	*	*	*											
8.....12	*	*	*	*										
12.....20	*	*	*	*	*									
20.....30	*	*	*	*	*	*								
30.....50	*	*	*	*	*	*	*							
50.....80	*	*	*	*	*	*	*	*						
80...125	*	*	*	*	*	*	*	*	*					
125...150	*	*	*	*	*	*	*	*	*	*				
150...200	*	*	*	*	*	*	*	*	*	*	*			
200...260	*	*	*	*	*	*	*	*	*	*	*	*		
260...350	*	*	*	*	*	*	*	*	*	*	*	*		
350 ...450	*	*	*	*	*	*	*	*	*	*	*	*		

3-rd stage. Determining required pump head

Duty point is determined by the system characteristic:

$$H_{syst.}(Q) = h_{stat.} + h_f(Q)$$

System characteristic consists of two parts: static and dynamic heads.

Static head of system characteristic

According to installation position static part is determined by geometric height of water lift relative to dynamic water level and geometric height of the tank. In case of operating with accumulating tank or water collector the back pressure must be taken into account.

Formula for the static part calculation:

$$h_{stat.} = H_{dyn} + H_{geo} + \frac{p_{res}}{\rho \cdot g}$$

where

H_{dyn} – dynamic water level, m

H_{geo} – height from wellhead to max water level in the tank, m

p_{res} – pressure in the tank

ρ – water density, kg/m³

g – acceleration of gravity, kg/m³

for a tank operating under atmospheric pressure

$$p_{res} = 0$$

Formula for determining dynamic water level:

$$H_f = H_{stat.} + S$$

where

S – level lowering according to the specific well yield chart, m

H_{st} – static water level, m

Dynamic head of system characteristic

Dynamic head is determined by losses in the pipeline and takes the form of quadratic dependence: $h_f(Q) = k \cdot Q^2$

where

k – loss coefficient that depends on losses along the pipeline and elements resistances (valves, manifolds, valves, adapters, etc.). That relation is shown as parabola on chart.

Formula for head losses:

$$h_f = h_{100} \cdot L / 100 + \Delta h$$

where

h_{100} – losses per every 100 m of a pipeline, m

L – actual pipeline length, m

Δh – elements loss value, m

Elements loss values according to flow rate are given in Valve reference books and manuals. h_{100} values for various material selection are also given in reference materials. Data on losses and flow rates in pipelines made of the most common materials is given in Table 4 and Table 5. (pp.13, 14).

Thus, by determining values of all system components for various capacities, system's head characteristic can be built:

$$H_{syst.}(Q) = h_{stat.} + h_f(Q)$$

Knowing required head, in accordance with 1-3 stages it is possible to determine a pump to comply with system features.

Table 4. Head losses in steel pipes

Upper value: Flow rate, m/sec. Lower value: Losses per every 100 m of a straight steel pipe

Capacity			Relative drift diameter / outer diameter x wall thickness / internal diameter, mm										
m ³ /h	L/min	L/sec	dN 25 33.5x3.2 27.1	dN 32 42.3x3.2 35.9	dN 40 48x3.5 41.0	dN 50 60x3.5 53	dN 65 76x3.5 69	dN 80 89x3.5 82	dN 100 108x3.5 101	dN 125 133x4.5 124	dN 150 159x4.5 150	dN 200 219x5 209	
1	16.67	0.28	0.48 1.91	0.27 0.48	0.21 0.25								
1.6	26.67	0.44	0.77 4.63	0.44 1.14	0.34 0.59	0.20 0.17							
2	33.33	0.56	0.96 7.08	0.55 1.73	0.42 0.90	0.25 0.25							
2.5	41.67	0.69	1.20 10.85	0.69 2.63	0.53 1.36	0.31 0.38	0.19 0.11						
3	50.00	0.83	1.44 15.40	0.82 3.72	0.63 1.91	0.38 0.54	0.22 0.15						
3.5	58.33	0.97	1.69 20.74	0.96 4.99	0.74 2.56	0.44 0.71	0.26 0.19	0.18 0.08					
4	66.67	1.11	1.93 26.86	1.10 6.44	0.84 3.30	0.50 0.91	0.30 0.25	0.21 0.11					
6.5	108	1.81	3.13 69.25	1.78 16.39	1.37 8.34	0.82 2.28	0.48 0.61	0.34 0.26	0.23 0.09				
8	133	2.22	3.85 104.10	2.20 24.54	1.68 12.45	1.01 3.39	0.59 0.90	0.42 0.38	0.28 0.14	0.18 0.05			
10	167	2.78		2.74 37.92	2.10 19.19	1.26 5.19	0.74 1.37	0.53 0.58	0.35 0.21	0.23 0.08			
12	200	3.33		3.29 54.18	2.52 27.38	1.51 7.38	0.89 1.94	0.63 0.82	0.42 0.29	0.28 0.11	0.19 0.04		
16	267	4.44		4.39 95.38	3.37 48.07	2.01 12.88	1.19 3.36	0.84 1.41	0.55 0.50	0.37 0.18	0.25 0.07		
20	333	5.56			4.21 74.53	2.52 19.88	1.49 5.17	1.05 2.16	0.69 0.76	0.46 0.27	0.31 0.11		
25	417	6.94			5.26 115.71	3.15 30.76	1.86 7.96	1.31 3.31	0.87 1.15	0.58 0.41	0.39 0.16	0.20 0.03	
30	500	8.33				3.78 44.00	2.23 11.34	1.58 4.70	1.04 1.63	0.69 0.58	0.47 0.23	0.24 0.04	
35	583	9.72				4.41 59.59	2.60 15.32	1.84 6.33	1.21 2.19	0.81 0.78	0.55 0.30	0.28 0.06	
40	667	11.11				5.04 77.53	2.97 19.89	2.10 8.20	1.39 2.84	0.92 1.01	0.63 0.39	0.32 0.07	
50	833	13.89				6.30 120.48	3.71 30.80	2.63 12.68	1.73 4.36	1.15 1.54	0.79 0.59	0.40 0.11	
65	1083	18.06					4.83 51.63	3.42 21.19	2.25 7.26	1.50 2.55	1.02 0.97	0.53 0.18	
80	1333	22.22					5.94 77.80	4.21 31.86	2.77 10.89	1.84 3.81	1.26 1.45	0.65 0.27	
100	1667	27.78						7.43 120.99	5.26 49.47	3.47 16.87	2.30 5.88	1.57 2.22	0.81 0.42
120	2000	33.33						6.31 70.92	4.16 24.13	2.76 8.39	1.89 3.17	0.97 0.59	
140	2333	38.89							7.36 96.23	4.85 32.70	3.22 11.35	2.20 4.27	1.13 0.79
160	2667	44.44							8.42 125.38	5.55 42.56	3.68 14.75	2.52 5.54	1.30 1.02
180	3000	50.00								6.24 53.71	4.14 18.59	2.83 6.97	1.46 1.28
200	3333	55.56								6.93 66.16	4.60 22.87	3.14 8.57	1.62 1.57
220	3667	61.11								7.63 79.91	5.06 27.60	3.46 10.33	1.78 1.89
240	4000	66.67								8.32 94.95	5.52 32.78	3.77 12.26	1.94 2.23
260	4333	72.22								9.01 111.29	5.98 38.39	4.09 14.35	2.11 2.61
280	4667	77.78									6.44 40.45	4.40 16.60	2.27 3.01
300	5000	83.33									6.90 50.96	4.72 19.02	2.43 3.45

Table 5. Head losses in plastic pipes

Upper value: Flow rate in m/sec. Lower value: Loss per every 100 m of a straight plastic pipe

Capacity			Outer diameter x wall thickness / internal diameter, mm																
m³/h	L/min	L/sec	25x2.8 19.4	32x3.0 26.0	40x3.7 32.6	50x4.6 40.8	63x5.8 51.4	75x6.8 61.4	90x8.2 73.6	110x10.0 90.0	125x11.4 102.2	140x12.7 114.6	160x14.6 130.8	180x16.4 147.2	200x18.2 163.6				
1	16.67	0.28	0.94 7.71	0.52 1.90	0.33 0.65	0.21 0.22													
1.6	26.67	0.44	1.50 17.74	0.84 4.38	0.53 1.49	0.34 0.51	0.21 0.17												
2	33.33	0.56	1.88 26.36	1.05 6.51	0.67 2.21	0.42 0.76	0.27 0.25	0.19 0.11											
2.5	41.67	0.69	2.35 39.17	1.31 9.68	0.83 3.29	0.53 1.13	0.33 0.37	0.23 0.16											
3	50.00	0.83	2.82 54.12	1.57 13.37	1.00 4.54	0.64 1.56	0.40 0.52	0.28 0.22	0.20 0.09										
3.5	58.33	0.97	3.29 71.14	1.83 17.58	1.16 5.97	0.74 2.05	0.47 0.68	0.33 0.29	0.23 0.12										
4	66.67	1.11	3.76 90.16	2.09 22.28	1.33 7.57	0.85 2.59	0.54 0.86	0.38 0.37	0.26 0.16	0.17 0.06									
6.5	108	1.81	6.11 213.34	3.40 52.72	2.16 17.90	1.38 6.13	0.87 2.04	0.61 0.87	0.42 0.37	0.28 0.14	0.22 0.08								
8	133	2.22		4.19 76.20	2.66 25.88	1.70 8.87	1.07 2.94	0.75 1.26	0.52 0.53	0.35 0.20	0.27 0.11	0.22 0.06							
10	167	2.78		5.23 113.20	3.33 38.44	2.12 13.17	1.34 4.37	0.94 1.87	0.65 0.79	0.44 0.30	0.34 0.16	0.27 0.10	0.21 0.05						
12	200	3.33		6.28 156.43	3.99 53.12	2.55 18.20	1.61 6.04	1.13 2.59	0.78 1.09	0.52 0.42	0.41 0.23	0.32 0.13	0.25 0.07	0.20 0.04					
16	267	4.44			5.32 88.50	3.40 30.32	2.14 10.07	1.50 4.31	1.04 1.81	0.70 0.69	0.54 0.38	0.43 0.22	0.33 0.12	0.26 0.07	0.21 0.04				
20	333	5.56			6.66 131.48	4.25 45.05	2.68 14.96	1.88 6.40	1.31 2.69	0.87 1.03	0.68 0.56	0.54 0.33	0.41 0.17	0.33 0.10	0.26 0.06				
25	417	6.94				5.31 66.92	3.35 22.22	2.35 9.51	1.63 4.00	1.09 1.53	0.85 0.84	0.67 0.48	0.52 0.26	0.41 0.15	0.33 0.09				
30	500	8.33				6.37 92.48	4.02 30.70	2.81 13.14	1.96 5.53	1.31 2.12	1.02 1.15	0.81 0.67	0.62 0.36	0.49 0.20	0.40 0.12				
35	583	9.72				7.44 121.57	4.69 40.36	3.28 17.27	2.29 7.27	1.53 2.78	1.19 1.52	0.94 0.88	0.72 0.47	0.57 0.27	0.46 0.16				
40	667	11.11				5.35 51.15	3.75 21.89	2.61 9.22	1.75 3.53	1.35 1.92	1.08 1.11	0.83 0.59	0.65 0.34	0.53 0.20	0.53 0.09				
50	833	13.89				6.69 75.99	4.69 32.52	3.26 13.69	2.18 5.24	1.69 2.86	1.35 1.65	1.03 1.40	0.82 0.88	0.66 0.50	0.66 0.30				
65	1083	18.06				8.70 121.03	6.10 51.80	4.24 21.81	2.84 8.35	2.20 4.55	1.75 2.63	1.34 1.40	1.06 0.80	0.86 0.48					
80	1333	22.22					7.51 74.87	5.22 31.52	3.49 12.06	2.71 6.57	2.15 3.81	1.65 2.02	1.31 1.15	1.06 0.70					
100	1667	27.78					9.38 111.23	6.53 46.82	4.37 17.92	3.39 9.77	2.69 5.65	2.07 3.01	1.63 1.71	1.32 1.03					
120	2000	33.33						7.83 64.70	5.24 24.77	4.06 13.50	3.23 7.81	2.48 4.16	1.96 2.36	1.59 1.43					
140	2333	38.89						9.14 85.05	6.11 32.55	4.74 17.74	3.77 10.27	2.89 5.46	2.29 3.11	1.85 1.88					
160	2667	44.44						10.45 107.79	6.99 41.26	5.42 22.49	4.31 13.02	3.31 6.92	2.61 3.94	2.11 2.38					
180	3000	50.00							7.86 50.84	6.10 27.71	4.85 16.04	3.72 8.53	2.94 4.86	2.38 2.93					
200	3333	55.56							8.73 61.29	6.77 33.41	5.39 19.34	4.13 10.29	3.26 5.85	2.64 3.53					
220	3667	61.11							9.61 72.58	7.45 39.56	5.92 22.90	4.55 12.18	3.59 6.93	2.91 4.19					
240	4000	66.67							10.48 84.70	8.13 46.16	6.46 26.72	4.96 14.21	3.92 8.09	3.17 4.88					
260	4333	72.22							11.35 97.62	8.80 53.21	7.00 30.80	5.37 16.38	4.24 9.32	3.44 5.63					
280	4667	77.78							12.23 111.34	9.48 60.68	7.54 35.13	5.79 18.69	4.57 10.63	3.70 6.42					
300	5000	83.33								10.16 68.58	8.08 39.70	6.20 21.12	4.90 12.02	3.96 7.26					

HYDRAULIC ACCUMULATOR SELECTION

Hydraulic accumulator (pressure storage reservoir) installation in many cases prevents excessively frequent pump starts and reduces the water hammer impact. Hence, power consumption is optimized as well as pump operational life and head stability increase.

There are different methods of hydraulic accumulator selection. Many manufacturers of accumulators offer their own selection programs. Selecting hydraulic accumulator is a challenging task that requires taking into consideration many factors such as:

- Uneven water consumption
- Uneven water supply by pumps
- Control volume vs. Total tank volume
- Allowable number of pump starts per hour

Hydraulic accumulator selection based on UNI 9182 is given below with the main factors such as:

- Max pump capacity
- Recommended number of start/stop per hour
- Configuring pressure switch, i.e. setting cut-on and cut-off pressure values
- Initial pressure in the accumulator air chamber must be less than cut-on pressure at least by 0.5 bar

Pressure values are assumed in absolute terms. 1 bar is added to values received with pressure gauges. There is a formula below to define optimal volume of the hydraulic accumulator:

$$V_{\text{accum}} = 16.5 \cdot \frac{Q_{\max}}{a} \cdot \frac{(p_{\text{off}}) \cdot (p_{\text{on}})}{(p_{\text{off}} - p_{\text{on}}) \cdot p_{\text{gas}}}$$

where

V_{accum} – hydraulic accumulator volume, liters

a – number of start/stop for pump,
per hour

Q_{\max} – max. pump capacity, liters/min*

$P(\text{on})$ – cut-on pressure, bar

$P(\text{off})$ – cut-off pressure, bar

$P(\text{gas})$ – initial pressure in the accumulator
air chamber, bar

The obtained value is rounded upwards to the nearest value of available hydraulic accumulator volume range.

*1 liter/min = 0,06 m³/h

PUMP INSTALLATION REQUIREMENTS

If the required pump capacity is higher than the borehole (well) yield then a dry running sensor shall be applied. In this case the pump will operate in a interrupted mode. Number of start/stop per hour and interval between them shall be taken into consideration accordingly to the pump manual.

Possible well defects such as pipe misalignment, poor quality of weld, well curvature may make the pump installation difficult or even impossible. Therefore, if there are doubts in well serviceability a check-up of the corresponding diameters is recommended before the pump installation.

Please follow the requirements of the pump manual during installation.

For stable operation the pump suction strainer shall be below dynamic water level at least by 1 meter.

The installation level must be measured from the pump inlet. The motor bottom level must be at least 1 m above the well filter. Failure to do so carries the risk of large amount of sand ingress and increased wear of the pump.

Discharge pipe diameter shall be equal to discharge nozzle diameter or differ insignificantly. It shall be noted that rising pipes with less inner diameter have increased friction losses. Though application of the rising pipes with increased inner diameter is impractical due to higher cost of the pipes. In selecting discharge pipe diameter the liquid flow-rate shall remain within 1.5 - 3.0 m/s.

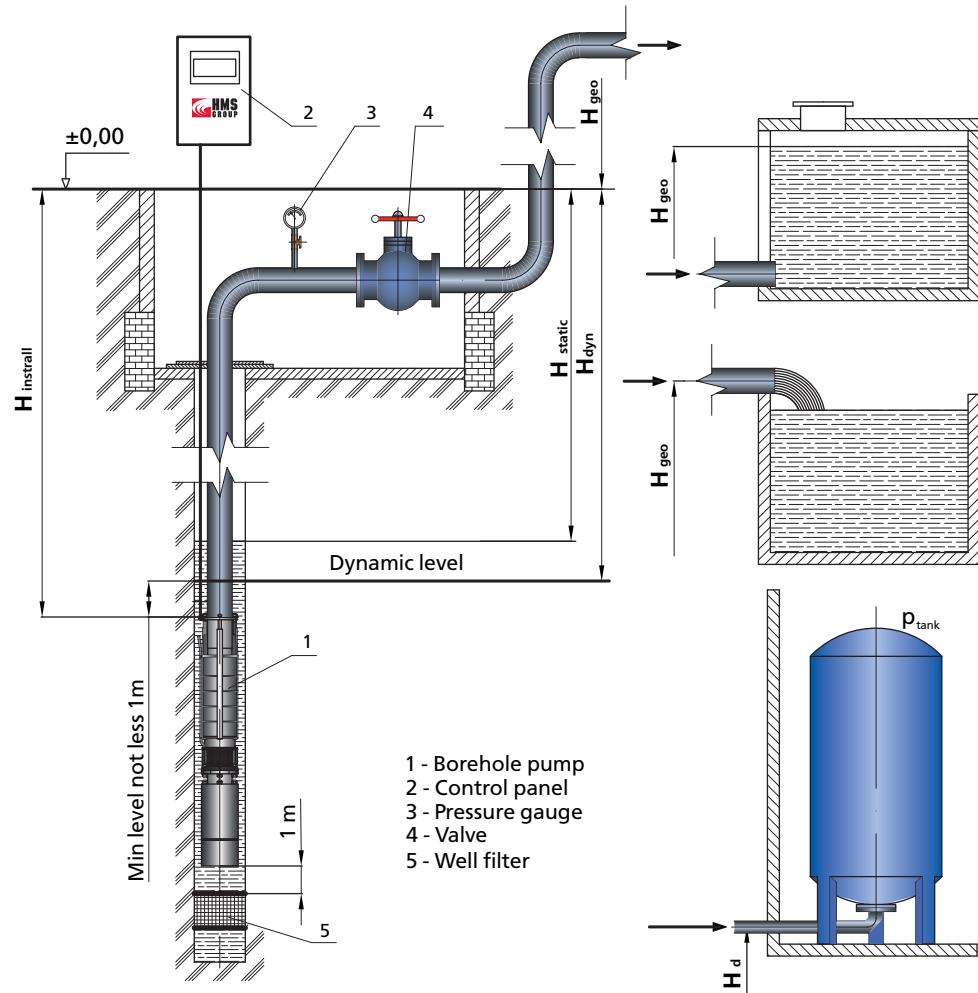


Fig. 3. Typical water intake options

PUMP SELECTION EXAMPLES

Example 1

Input data:

Water is supplied from the well into the water tower located 20 m above the well. (Fig. 4). Required pump capacity = 40 m³/h. Height from the ground level to the top water level in the water tower tank = 15 m. Water tower is located 100 m away from the well. Static water level in the well = 30 m. Level lowering S = 10 m according to the specific yield chart at 40 m³/h. Pipes are made of steel.

System characteristic calculation:

Dynamic water level will be at $H_{dyn} = 40$ m. Proceeding from recommended flow-rate 1.5-3.0 m/sec we select dN 80 in the Table 4. At $Q=40$ m³/h and dN 80 the flow rate will approximately be 2.1 m/sec. According to the Table 4 the head loss will be 8.2 m per every 100 meters of the pipeline. Total pipeline length with horizontal and vertical sections will be $40+100=140$ m.

Therefore losses per length will be:

$$h_f = 8.2 \cdot \frac{140}{100} = 11.5 \text{ m}$$

In accordance with the reference book head losses of DN 80 valve is 0.09 m; head losses of pipe bend DN 80 is 0.07 m. Dynamic head losses:

$$h_f = 8.2 \cdot \frac{140}{100} + 0.09 + 3 \cdot 0.07 = 11.8 \text{ m}$$

Static head will be:

$$h_{stat} = H_f + H_{geo} + \frac{p_{res}}{p \cdot g} = 40 + (20 + 15) + 0 = 75 \text{ m}$$

Total system head will be:

$$H_{syst} = h_f + h_{stat} = 75 + 11.9 = 86.8 \text{ m}$$

If there are no other unaccounted losses then pump with 86.8 m head would be needed.

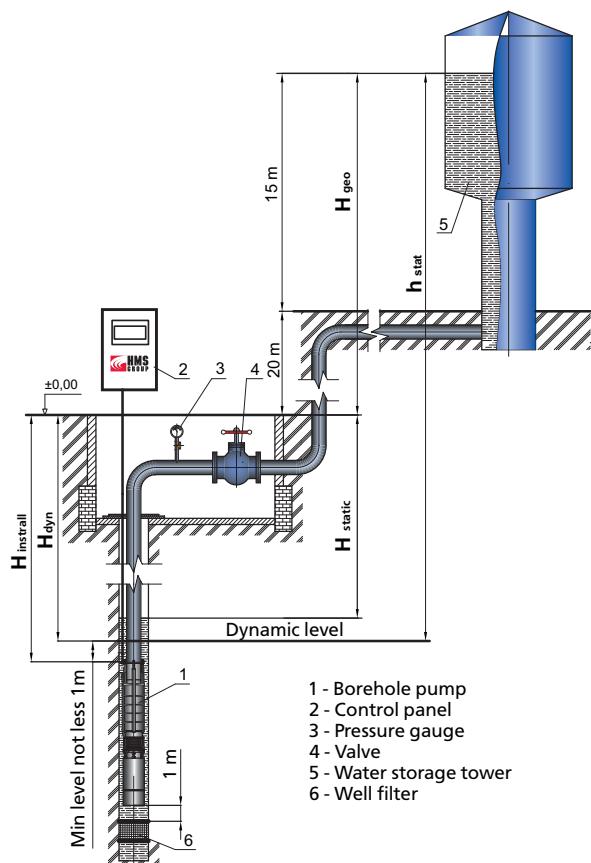


Fig. 4. Example 1

In the catalogue we select the pumps with the max efficiency at this head value. On the head curve we need to find the operating point and the closest pump curve (Fig. 5).

In our case we would select CRS 8-40/6-15 pump. At 40 m³/h capacity provides 90 m head.

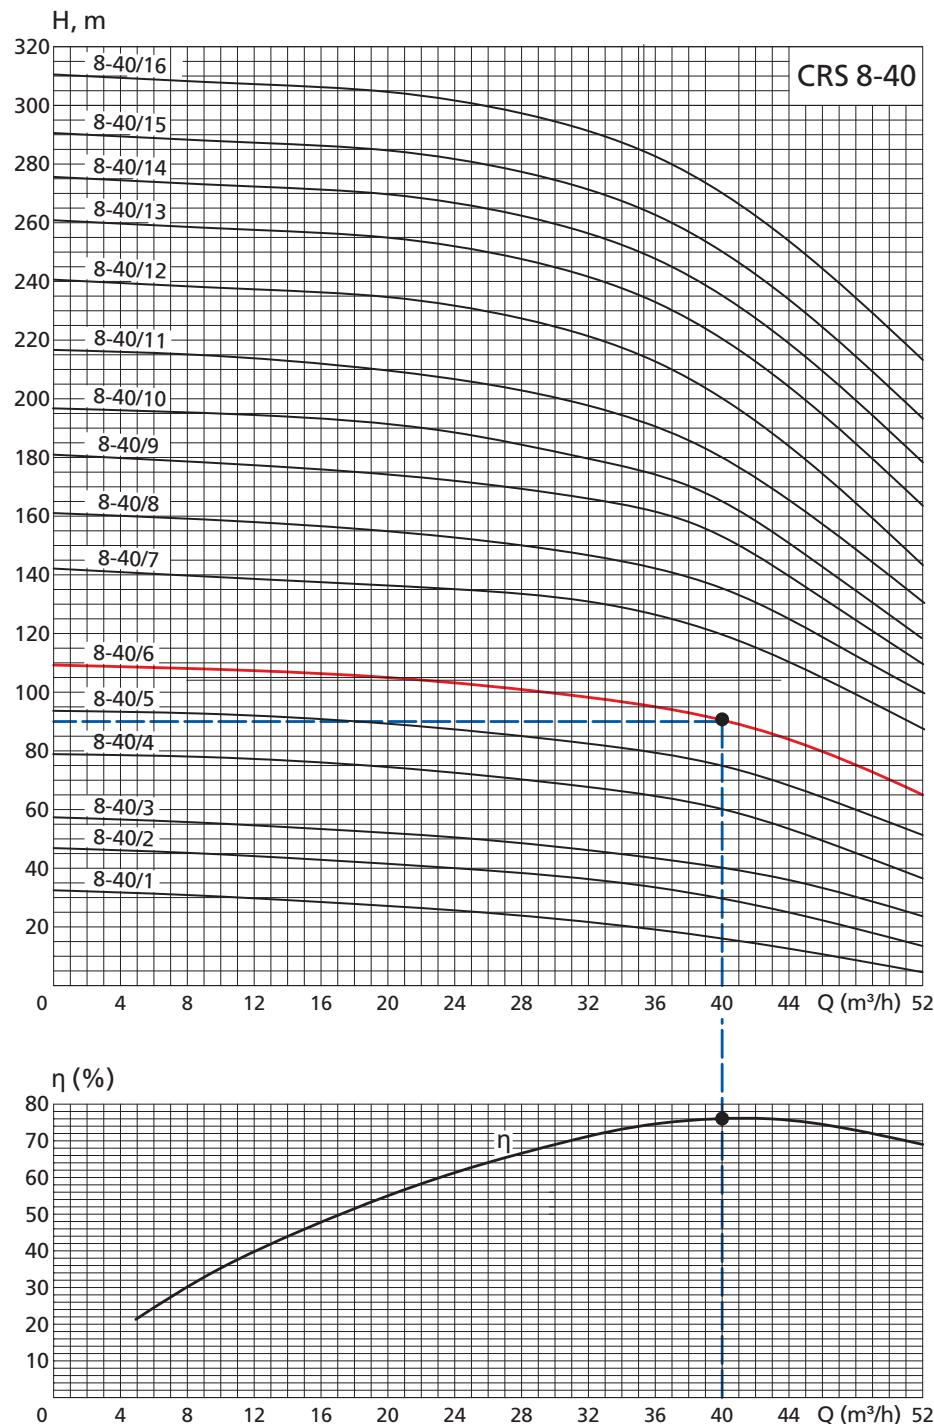


Fig. 5. HMS Ciris pump features

PUMP SELECTION EXAMPLES

Example 2

Input data:

Water is supplied from the well into hydraulic accumulator (Fig. 6). Required capacity = 8 m³/h.
Static water level = 40 m. Level lowering S = 5 m according to the specific yield chart at 8 m³/h.

Pressure switch shall provide:

- Cut-on pressure = 1.8 bar
- Cut-off pressure = 4.5 bar
- Max. gas pressure in membrane = 1.5 bar
- Max. number of starts per hour = 6

Hydraulic accumulator selection: according to UNI 9182 we get:

$$V_{accum} = 16.5 \cdot \frac{Q_{max}}{a} \cdot \frac{(p_{off}) \cdot (p_{on})}{(p_{off} - p_{on}) \cdot p_{gas}} = 16.5 \cdot \frac{8 \cdot 1000 / 60}{6} \cdot \frac{(4.5+1) \cdot (1.8+1)}{[(4.5+1) - (1.8+1)] \cdot (1.5+1)} = 836.5 \text{ liters}$$

the closest volume will be = 1000 l.

System feature calculation:

Dynamic water level will be at $h_{dyn} = 45$ m. Proceeding from recommended flow-rate 1.5 - 3 m/s we need to select pipeline diameter from the Table 5. As plastic pipeline has lower hydraulic resistance than steel pipelines we then can choose lower diameter, even lower than pump outlet diameter. Proceeding from recommended flow-rate 1.5 - 3 m/s we would select D = 40.8 mm from the Table 5.

At Q=8 m³/h and D=40.8 mm the flow-rate will approximately make 1.7 m/s. According to the Table 5 head loss will be 8.87 m per every 100 m of the pipeline. Pipeline length = 45 m. Local losses are negligible compared to losses per length at vertical section and also compared to head and accumulator pressure.

$$h_f = h_{100} \cdot L / 100 + \Delta h = 8.87 \cdot \frac{45}{100} = 4.0 \text{ m}$$

$$h_{stat.} = H_{dynamic} + H_{static} + \frac{p_{gas}}{\rho \cdot g} = 45 + \frac{4.5 \cdot 10^5}{1000 \cdot 9.81} = 90.87 \text{ m}$$

$$H_{syst}(Q) = h_{stat.} + h_f(Q) = 90.87 + 4.0 = 94.87 \text{ m}$$

If there are no other unaccounted losses then pump with 94.9 m head would be needed.

As in the previous example we need to select a pump from the catalogue with maximum efficiency at required head. By finding the operating point on the head feature and the closest pump curve we would select CRS 6-10/8-4 pump with 8 m³/h capacity and 96 m head.

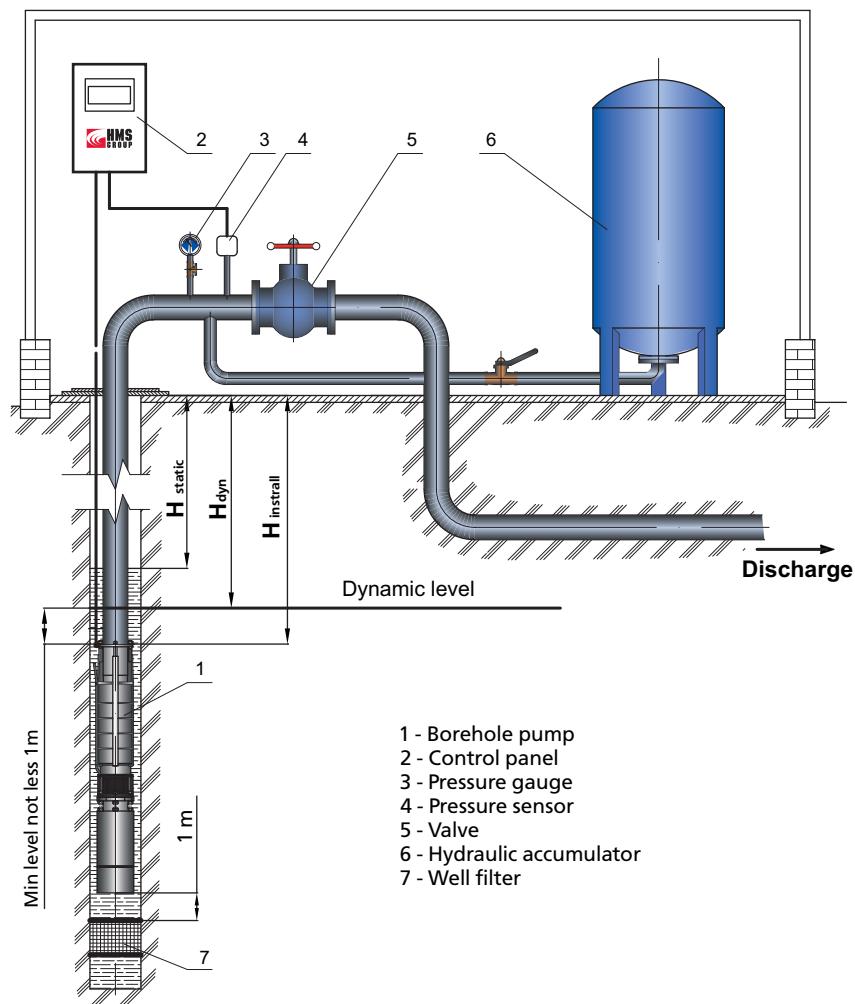


Fig. 6. Example 2

OPERATION WITH VARIABLE SPEED DRIVES

Pump operation with variable speed drives has become very common recently though it cannot always cut power consumption. Their use would be most beneficial in systems with dominant dynamic part, i.e. with friction losses in pipelines and valves (Fig. 7).

Use of VSD in a system with predominant static part (Fig. 8) leads to significant efficiency drop if capacity changes.

In this case start / stop control of required number of pumps installed in parallel connection would be the most effective.

Therefore significant optimization of power consumption lays within system feature and its change over time.

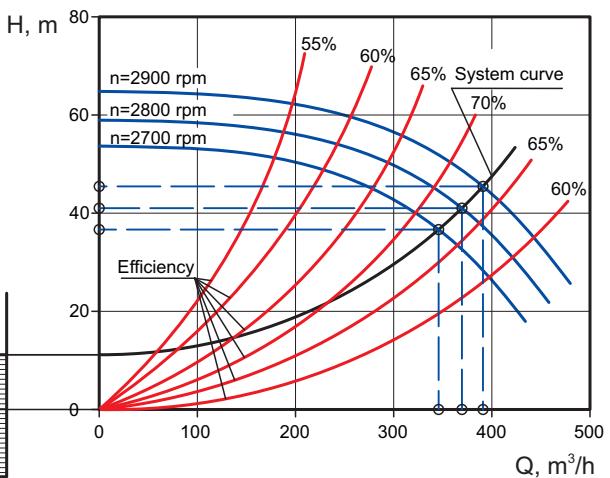
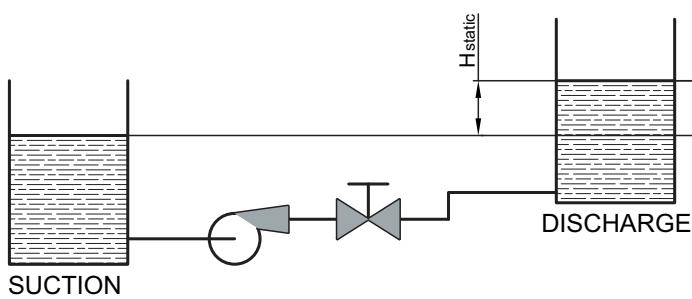


Fig. 7. Pump operation in system with predominant friction losses in case of speed control

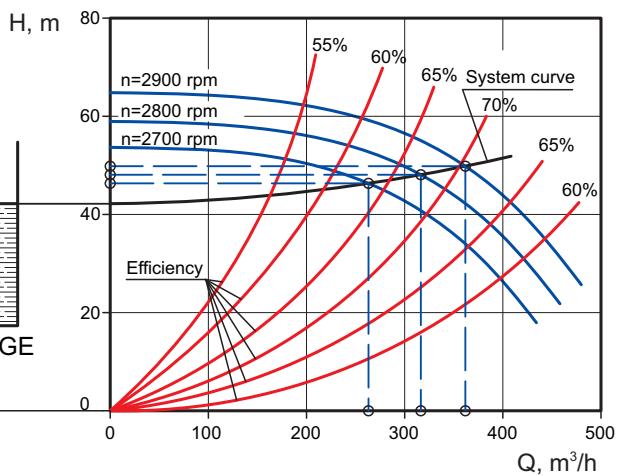
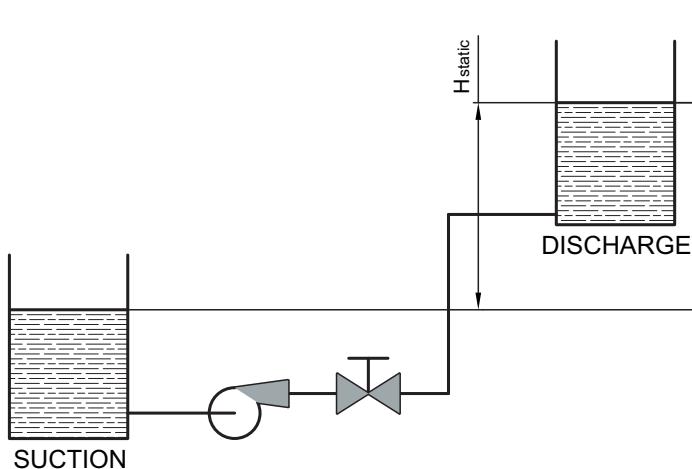


Fig. 8 Pump operation in system with predominant static part in case of speed control

BOREHOLE PUMPS OPERATION WITH FREQUENCY INVERTERS

In operation with frequency inverters the following requirements should be complied with:

- For efficient motor cooling the capacity shall be at least 20% of nominal capacity defined on Q-H curve. For example, CRS 6-10 nominal capacity = 8 m³/h. Pump usually is controlled by pressure. Capacity may fall below a specified level therefore the flow sensor (switch) is recommended to be installed to switch off the motor in case of capacity drop below the operational range.
- Temperature sensor (to switch off motor at temperature higher than 70 °C) is recommended to be installed to protect the motor winding from overheating, blowing and breakdown.
- If a cable connecting the pump unit and the inverter is quite long then the output filters are recommended to be installed: dv/dt filters or sine wave filters for reducing motor insulation stress and protect from high voltage pulses, premature wear and breakdown. Recommendations of appropriate filters installation should be checked with the variable drive manufacturer.

In case of uneven water supply the frequency inverter shall be applied used with hydraulic accumulator or intermediate storage tank of appropriate capacity cooling. Please bear in mind that in case of large static part in the system characteristic using of variable speed drives does not result in energy efficiency, and only reduces volume and dimensions of intermediate storage tanks and risks of water hammer.

TYPICAL MISTAKES IN PUMP SELECTION AND OPERATION

Frequent pumps failures and excessive power consumption lays at the wrong pump selection and unqualified maintenance during operation.

Most typical mistakes are listed below:

- 1. Pump installation and operation with overestimated parameters** (capacity, head) than required, i.e. use of oversized pump that would cause the unnecessarily high capital cost of equipment.

This problem may occur both at the construction stage (Fig. 9-12) and during operation if system features change.

The following below is typical in this case:

- real current consumption is significantly higher than nominal
- frequent triggering of the control panels under condition that control panel complies with the pump parameters
- frequent pump starts/stops

Pump operation in that mode may lead to:

- higher water turbidity and sand content, filter clogging and water quality deterioration
- increased power consumption at decreased efficiency
- motor overheating
- motor winding breakdown
- wear resistance from floating impellers

Throttling control with valves leads to excessive power loss due to friction.


2. Pump operation at a lower capacity results in:

- inadequate cooling and eventually motor overheating
- increased wear of bearings due to insufficient lubrication
- lower pump efficiency

3. Selection according to max capacity and head

Please bear in mind that besides operation at a max efficiency there are other modes of operation. Therefore the storage tanks installation and variable pump control methods are recommended.

Head

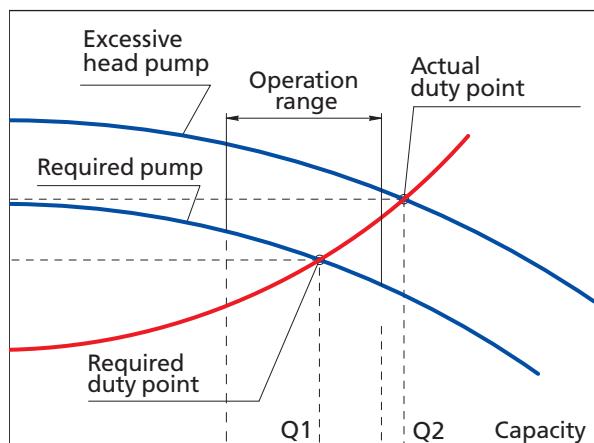

Power


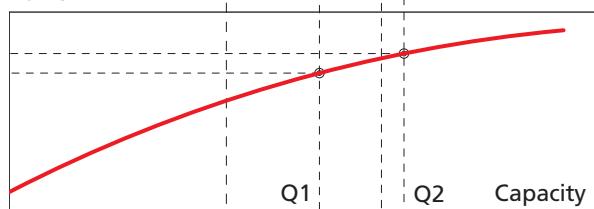


Fig. 9. Pump operation with excessive head

Head

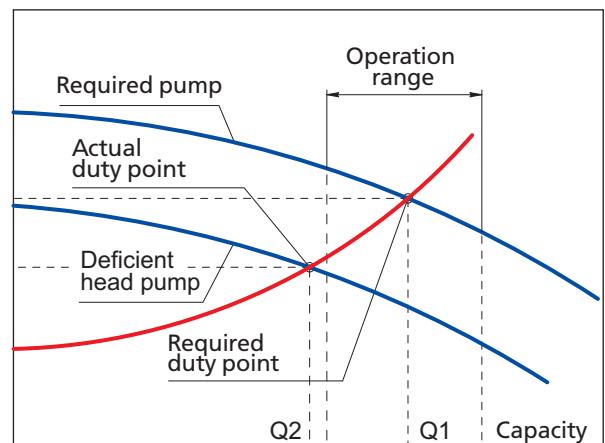

Efficiency


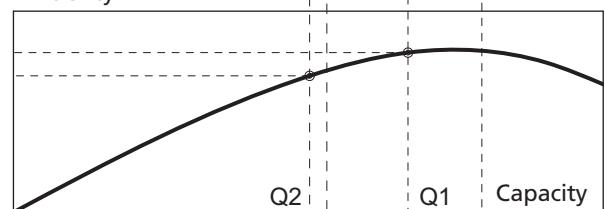


Fig. 10. Pump operation with deficient head

Head

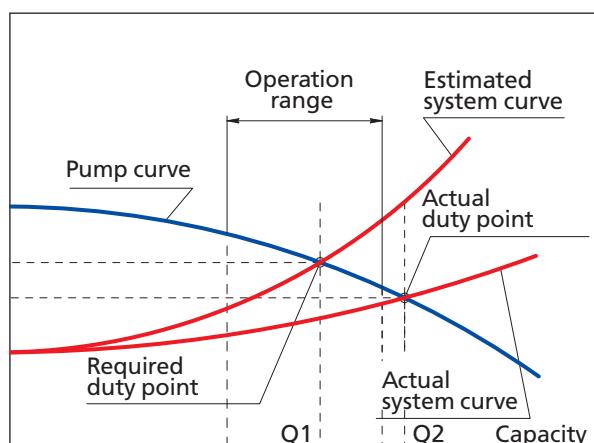

Power


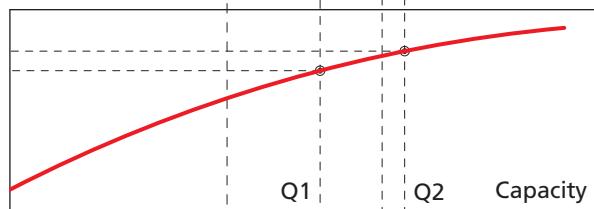


Fig. 11. Pump operation at a higher capacity

Head

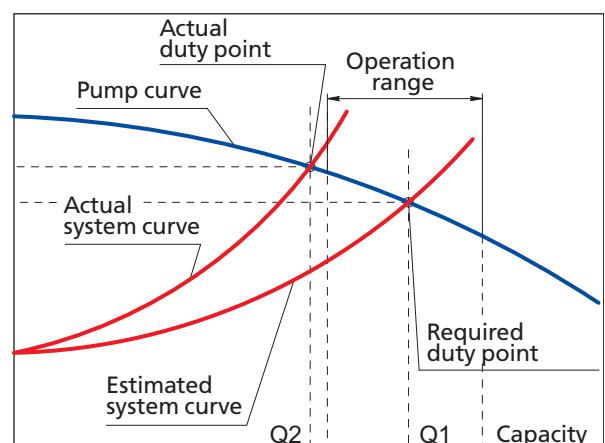

Efficiency

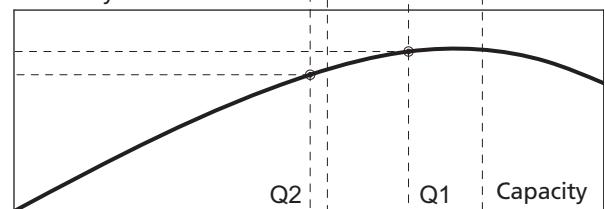


Fig. 12. Pump operation at a lower capacity

4. Pump operation without cooling shroud in a well of larger diameter

Installation of a pump of lower diameter in respect to diameter of the well reduces significantly the liquid flow rate required for the motor cooling and leads to overheating and shortened operational life.

The pump diameter should be selected in a way to keep the liquid velocity at least 0.2 m/s.

$$Q = v \cdot S$$

$$S = \frac{\pi \cdot (D^2 - d^2)}{4}$$

Pump diameter is selected according to required capacity:

$$d \geq \sqrt{D^2 - \frac{4 \cdot (Q / 3600)}{\pi \cdot v}} = \sqrt{D^2 - \frac{Q}{900 \cdot \pi \cdot (0.2 \text{ m/s})}}$$


where

D – well diameter, m

d – pump diameter, m

Q – pump capacity, m³/h

v – average liquid velocity, m/s

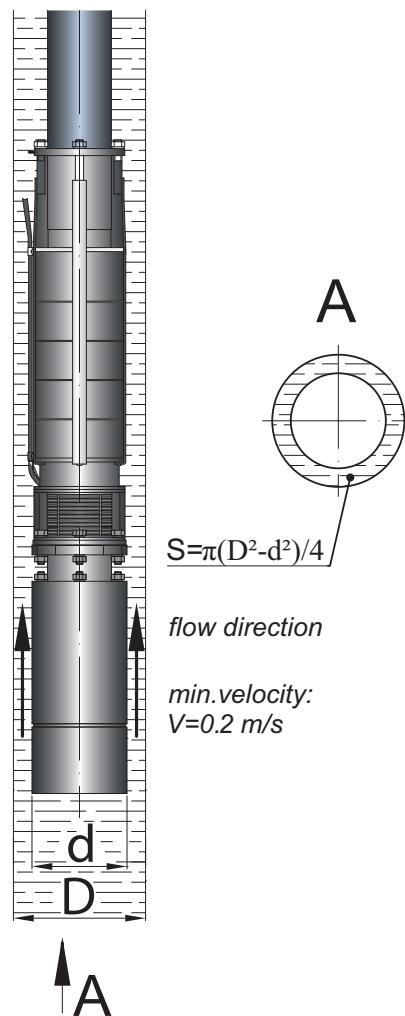

5. Pipe selection of lower diameter

Use of pipes of lower diameter than size of discharge nozzle (thread or flanged) for saving purpose results in major loss due to friction and increase of required head. The required liquid flow presumably could not be reached at that.

6. Cable selection of smaller cross-section

Selecting cross-section lower than recommended will lead to significant voltage drop which would affect the motor and cause overheating.

7. Pump capacity exceeds well yield. That leads to dry running operation, which will cause:

- motor overheating
- rapid wear of bearings
- increased corrosion

8. Poor quality of supply voltage and absence of control panels

Direct connection to the power supply does not help to protect the motor from the most typical causes of failure such as current unbalance, phase reversal, under/overvoltage, etc.

9. Built-in non-return valve dismantling

Leads to pump parts experiencing water hammer when pump stops. Besides, after each start the pump is running to fill the pipeline.

10. Absence of instrumentation

Instrumentation and sensors (water level, pressure, flow rate, voltage, current, number of starts/stops and time of pump operation, etc.) provide valid data on the pump operation and system features for monitoring and timely intervention into pump operation.

PERFORMANCE CURVES AND DIMENSIONS

Performance curves are given according to ISO 9906:1999, Appendix A for the following conditions:

- rated rotation speed
- voltage supply frequency: 50 Hz
- pumped liquid: clean fresh water
- water temperature: +20°C
- kinematic viscosity: $1 \cdot 10^{-6} \text{ m}^2/\text{s}$ (1cSt)

Hydraulic losses in non-return valve are taken into account.

Performance curves are given for one pump stage as well as power curves.

$$P_{2_pump} = P_{2_stg} \cdot n$$








where


- P_{2_stg} — stage power, kW
- P_{2_pump} — pump shaft power, kW
- n — number of stages

It is recommended to select a pump according to operation at max efficiency within 0.6-1.2 capacity range.


Delivery status (indicated in table):


«+» - in storage. Empty field – model available on request.

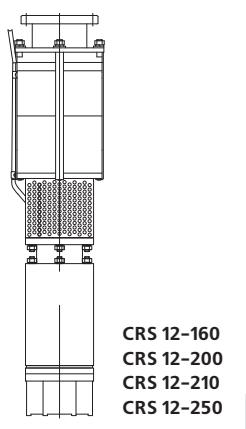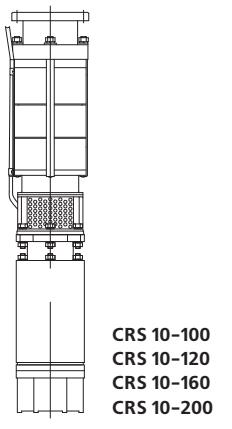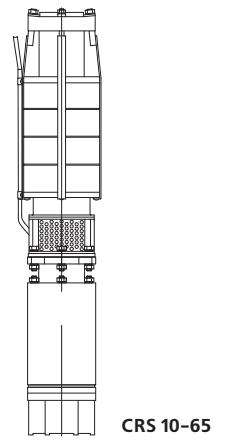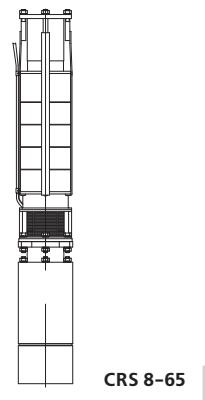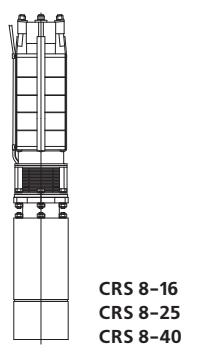

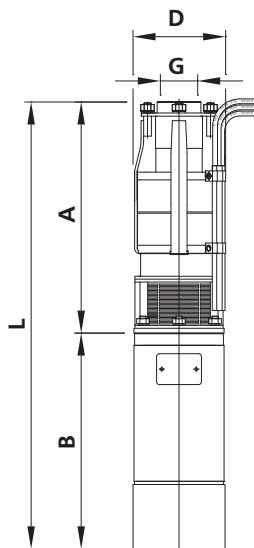
HMS CIRIS 6-4


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 6-4/6-3	DAP 6-3	3	144	1070	473	597	G2" - B GOST 6357 standard	57
CRS 6-4/7-3	DAP 6-3	3	144	1115	518	597		60
CRS 6-4/8-3	DAP 6-3	3	144	1155	558	597		62
CRS 6-4/9-3	DAP 6-3	3	144	1200	603	597		64
CRS 6-4/10-3	DAP 6-3	3	144	1240	643	597		67
CRS 6-4/11-4	DAP 6-4	4	144	1270	649	621		69
CRS 6-4/12-4	DAP 6-4	4	144	1310	689	621		71
CRS 6-4/13-4	DAP 6-4	4	144	1355	734	621		73
CRS 6-4/14-4	DAP 6-4	4	144	1395	774	621		74
CRS 6-4/15-4	DAP 6-4	4	144	1440	819	621		75
CRS 6-4/16-4	DAP 6-4	4	144	1480	859	621		76

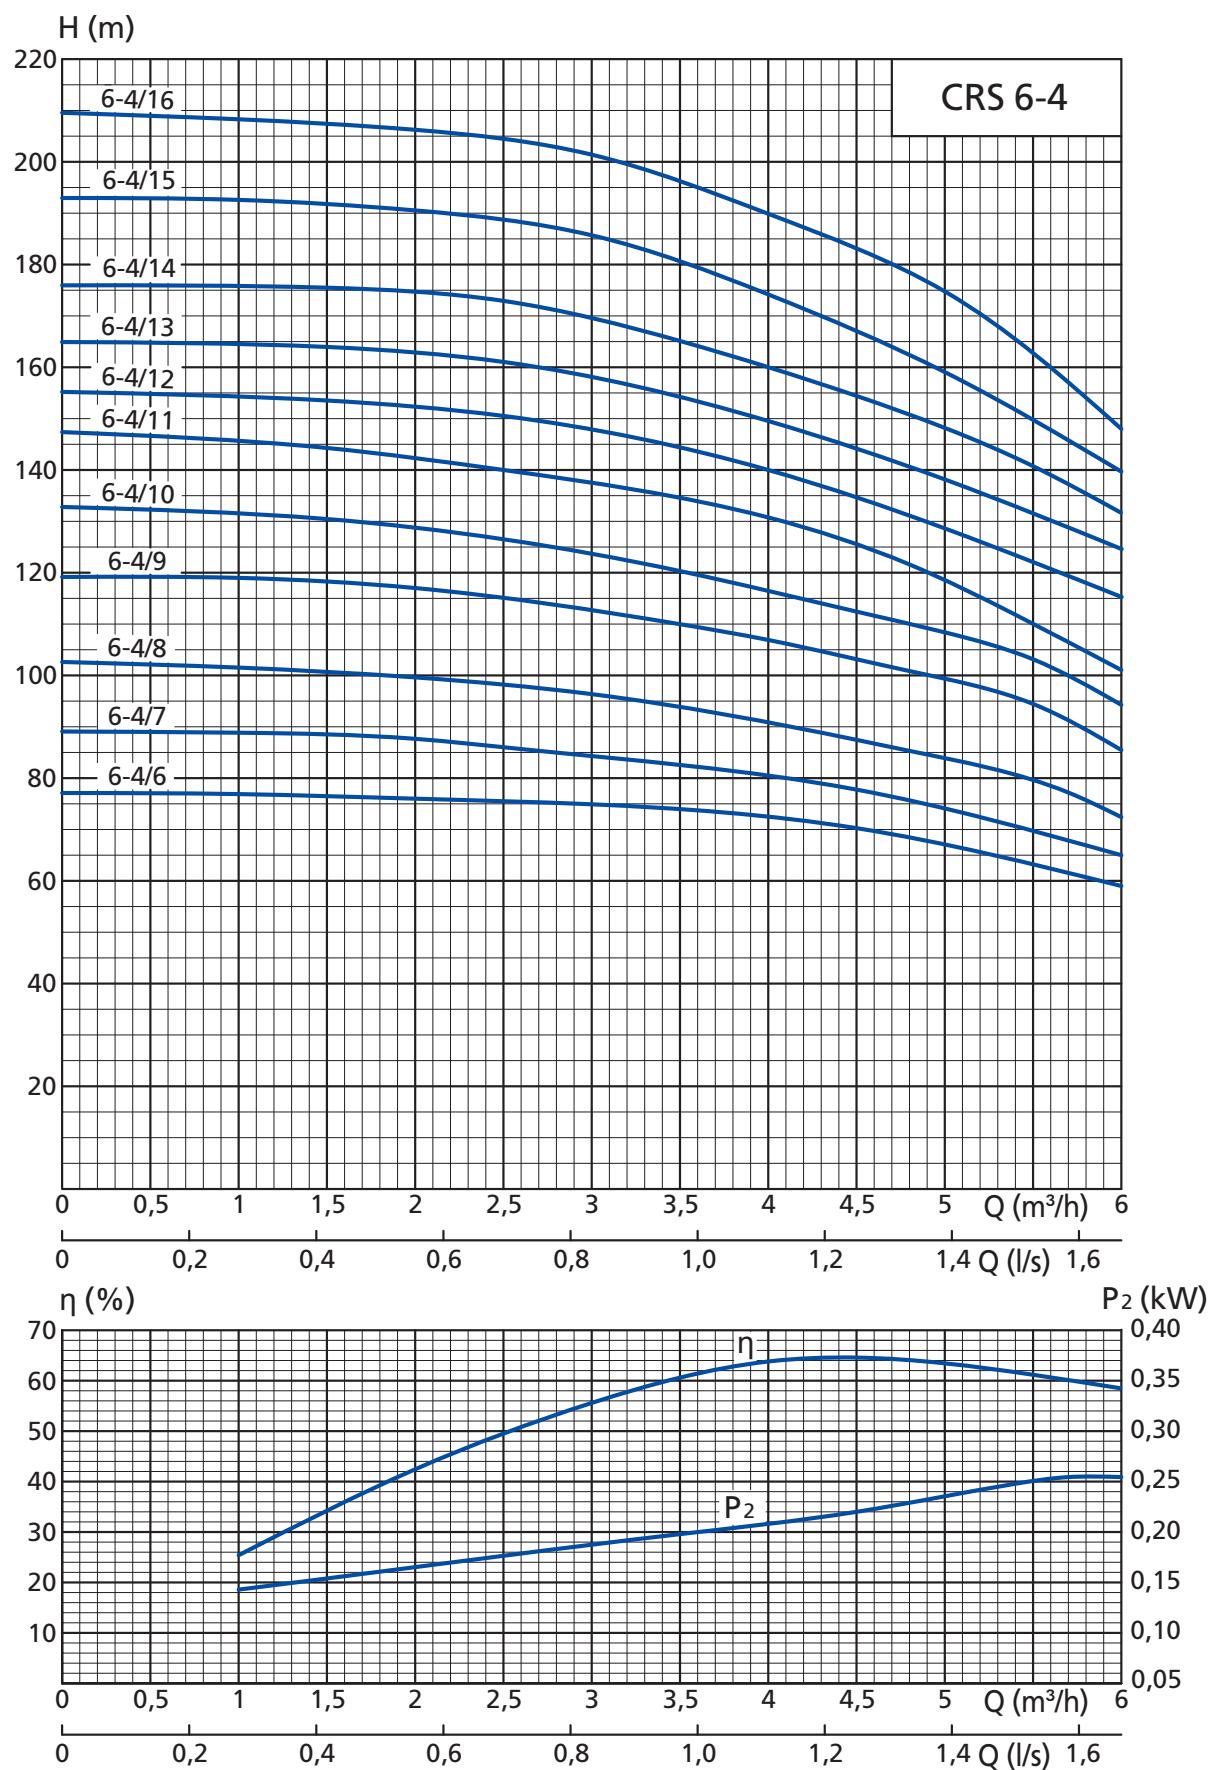

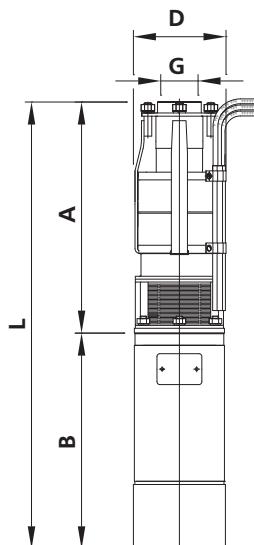
HMS CIRIS 6-6.5


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 6-6.5/6-3	DAP 6-3	3	144	1075	478	597	G2" - B GOST 6357 standard	62
CRS 6-6.5/7-3	DAP 6-3	3	144	1125	528	597		63
CRS 6-6.5/8-3	DAP 6-3	3	144	1170	573	597		64
CRS 6-6.5/9-4	DAP 6-4	4	144	1230	609	621		66
CRS 6-6.5/10-4	DAP 6-4	4	144	1270	649	621		67
CRS 6-6.5/11-4	DAP 6-4	4	144	1310	689	621		68
CRS 6-6.5/12-5.5	DAP 6-5.5	5.5	144	1410	769	641		74
CRS 6-6.5/13-5.5	DAP 6-5.5	5.5	144	1420	779	641		75
CRS 6-6.5/14-5.5	DAP 6-5.5	5.5	144	1430	789	641		75
CRS 6-6.5/15-7.5	DAP 6-7.5	7.5	144	1540	834	706		84
CRS 6-6.5/16-7.5	DAP 6-7.5	7.5	144	1590	884	706		85
CRS 6-6.5/17-7.5	DAP 6-7.5	7.5	144	1640	934	706		86
CRS 6-6.5/18-7.5	DAP 6-7.5	7.5	144	1690	984	706		88
CRS 6-6.5/19-7.5	DAP 6-7.5	7.5	144	1740	1034	706		89
CRS 6-6.5/20-9	DAP 6-9	9	144	1790	1059	731		90
CRS 6-6.5/21-9	DAP 6-9	9	144	1840	1109	731		91
CRS 6-6.5/22-11	DAP 6-11	11	144	1890	1124	766		92
CRS 6-6.5/23-11	DAP 6-11	11	144	1940	1174	766		94
CRS 6-6.5/24-11	DAP 6-11	11	144	1990	1224	766		95
CRS 6-6.5/25-11	DAP 6-11	11	144	2040	1274	766		96
CRS 6-6.5/26-13	DAP 6-13	13	144	2090	1269	821		97
CRS 6-6.5/27-13	DAP 6-13	13	144	2140	1319	821		98

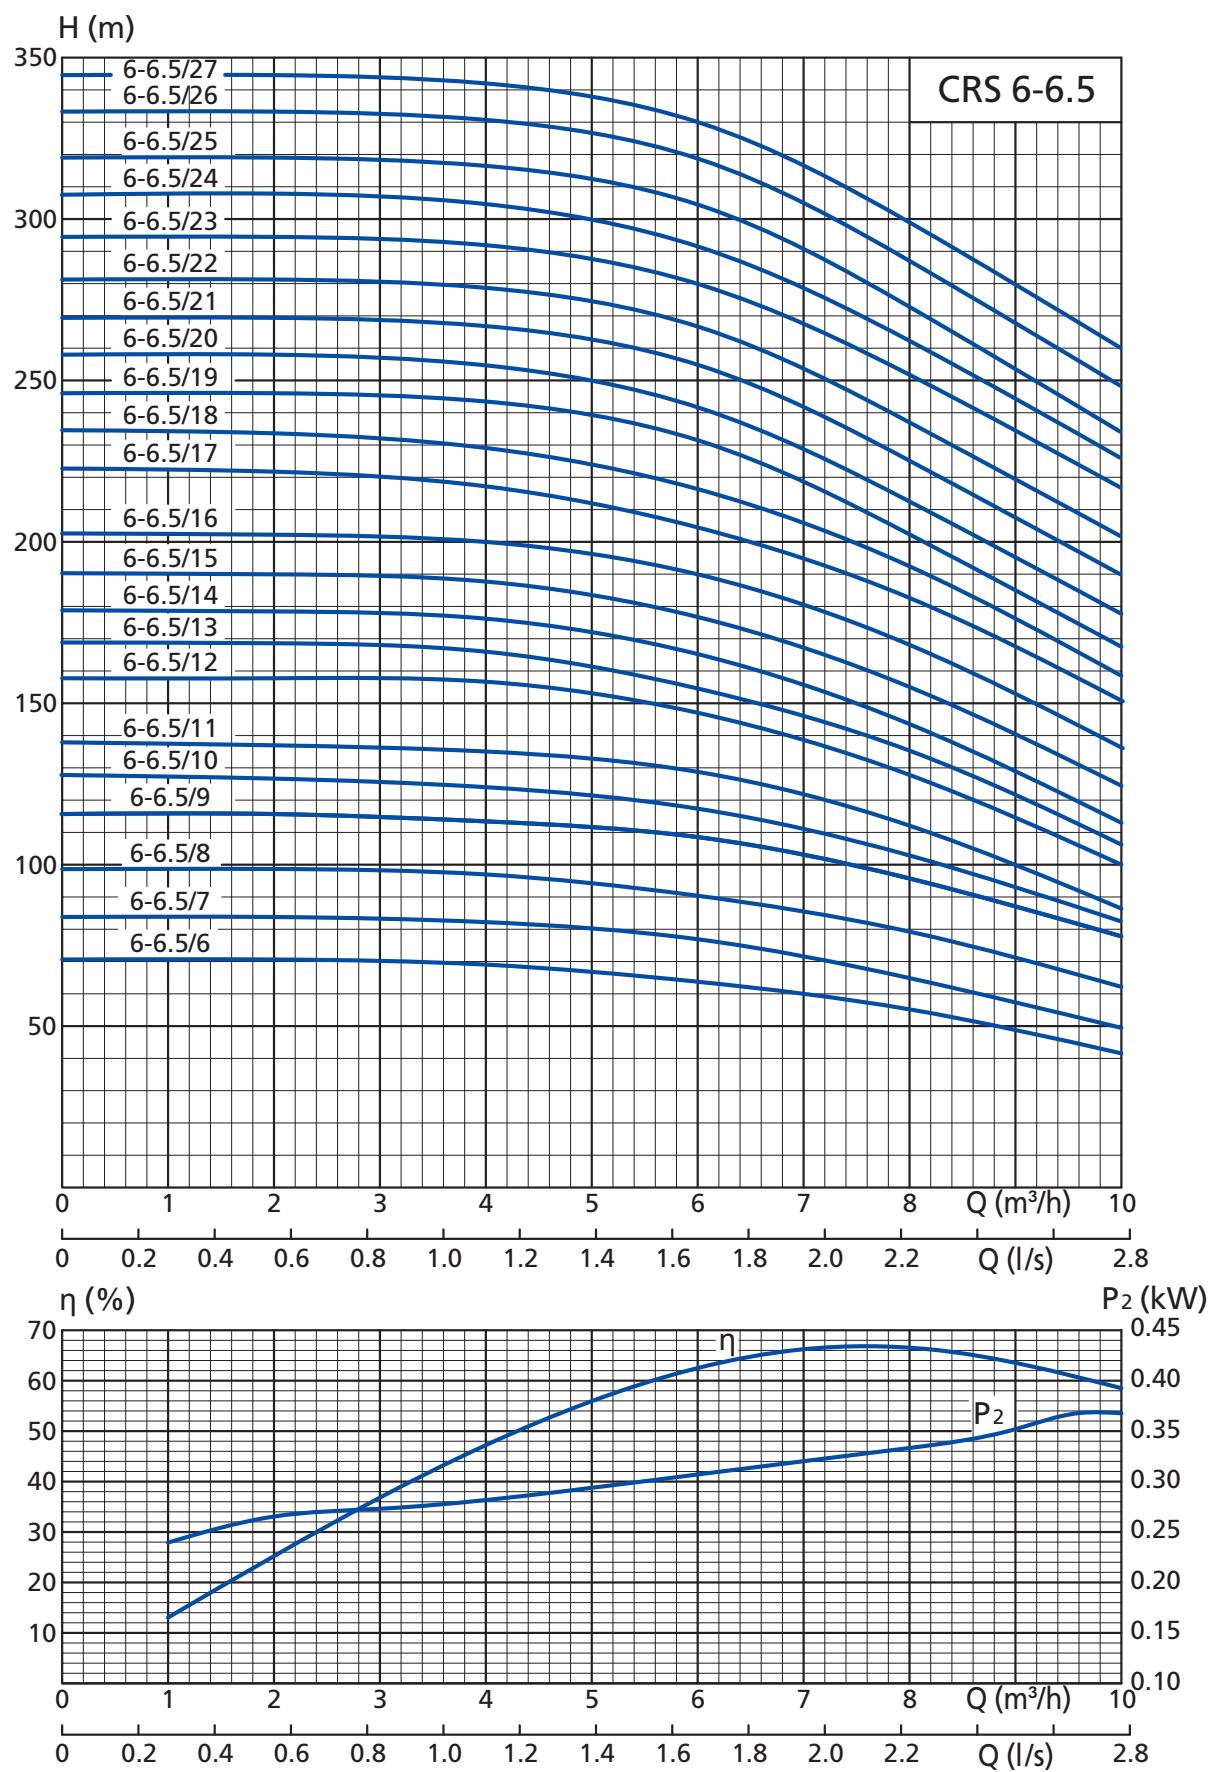


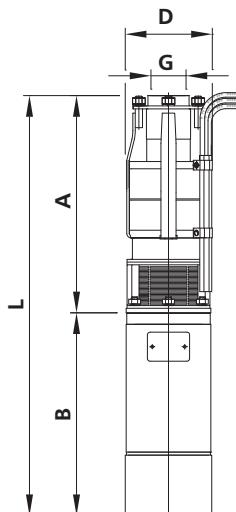HMS CIRIS 6-10


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 6-10/2-3	DAP 6-3	3	144	930	333	597		57
CRS 6-10/3-3	DAP 6-3	3	144	970	373	597		58
CRS 6-10/4-3	DAP 6-3	3	144	1010	413	597		59
CRS 6-10/5-3	DAP 6-3	3	144	1050	453	597		60
CRS 6-10/6-3	DAP 6-3	3	144	1090	493	597		61
CRS 6-10/7-4	DAP 6-4	4	144	1150	529	621		64
CRS 6-10/8-4	DAP 6-4	4	144	1190	569	621		65
CRS 6-10/9-5.5	DAP 6-5.5	5.5	144	1250	609	641		68
CRS 6-10/10-5.5	DAP 6-5.5	5.5	144	1320	679	641		69
CRS 6-10/11-5.5	DAP 6-5.5	5.5	144	1335	694	641		70
CRS 6-10/12-7.5	DAP 6-7.5	7.5	144	1435	729	706		79
CRS 6-10/13-7.5	DAP 6-7.5	7.5	144	1470	764	706		80
CRS 6-10/14-7.5	DAP 6-7.5	7.5	144	1515	809	706		81
CRS 6-10/15-9	DAP 6-9	9	144	1580	849	731		84
CRS 6-10/16-9	DAP 6-9	9	144	1620	889	731		85
CRS 6-10/17-9	DAP 6-9	9	144	1660	929	731		86
CRS 6-10/18-9	DAP 6-9	9	144	1700	969	731		87
CRS 6-10/19-11	DAP 6-11	11	144	1770	1004	766		92
CRS 6-10/20-11	DAP 6-11	11	144	1810	1044	766		93
CRS 6-10/21-11	DAP 6-11	11	144	1850	1084	766		94
CRS 6-10/22-11	DAP 6-11	11	144	1890	1124	766		95
CRS 6-10/23-13	DAP 6-13	13	144	1990	1169	821		101
CRS 6-10/24-13	DAP 6-13	13	144	2025	1204	821		102
CRS 6-10/25-13	DAP 6-13	13	144	2065	1244	821		103
CRS 6-10/26-13	DAP 6-13	13	144	2105	1284	821		104
CRS 6-10/27-13	DAP 6-13	13	144	2145	1324	821		105
CRS 6-10/28-15	DAP 6-15	15	144	2225	1364	861		110
CRS 6-10/29-15	DAP 6-15	15	144	2265	1404	861		111
CRS 6-10/30-15	DAP 6-15	15	144	2305	1444	861		112
CRS 6-10/31-15	DAP 6-15	15	144	2345	1484	861		113
CRS 6-10/32-15	DAP 6-15	15	144	2385	1524	861		114
CRS 6-10/33-18.5	DAP 6-18.5	18.5	144	2470	1564	906		120
CRS 6-10/34-18.5	DAP 6-18.5	18.5	144	2510	1604	906		121
CRS 6-10/35-18.5	DAP 6-18.5	18.5	144	2550	1644	906		122
CRS 6-10/36-18.5	DAP 6-18.5	18.5	144	2590	1684	906		123
CRS 6-10/37-18.5	DAP 6-18.5	18.5	144	2630	1724	906		124

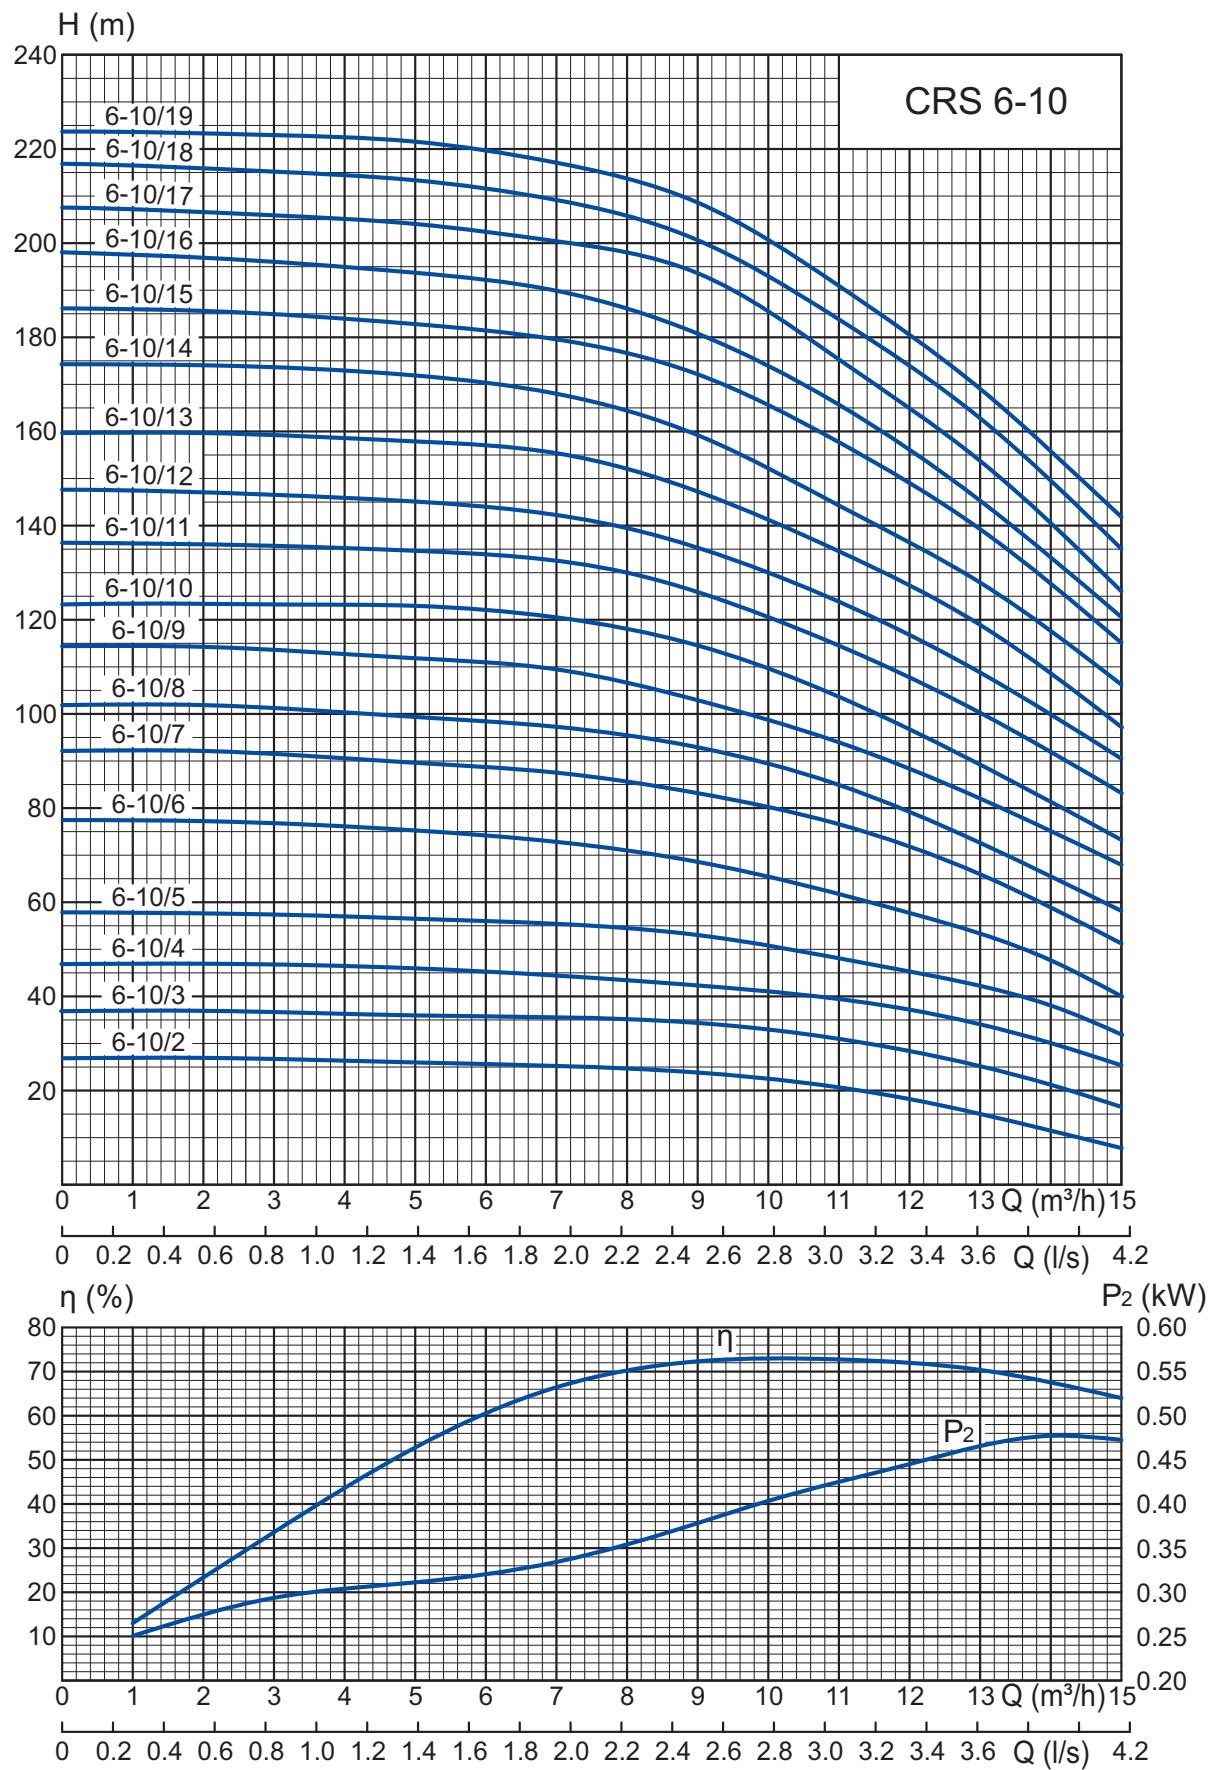


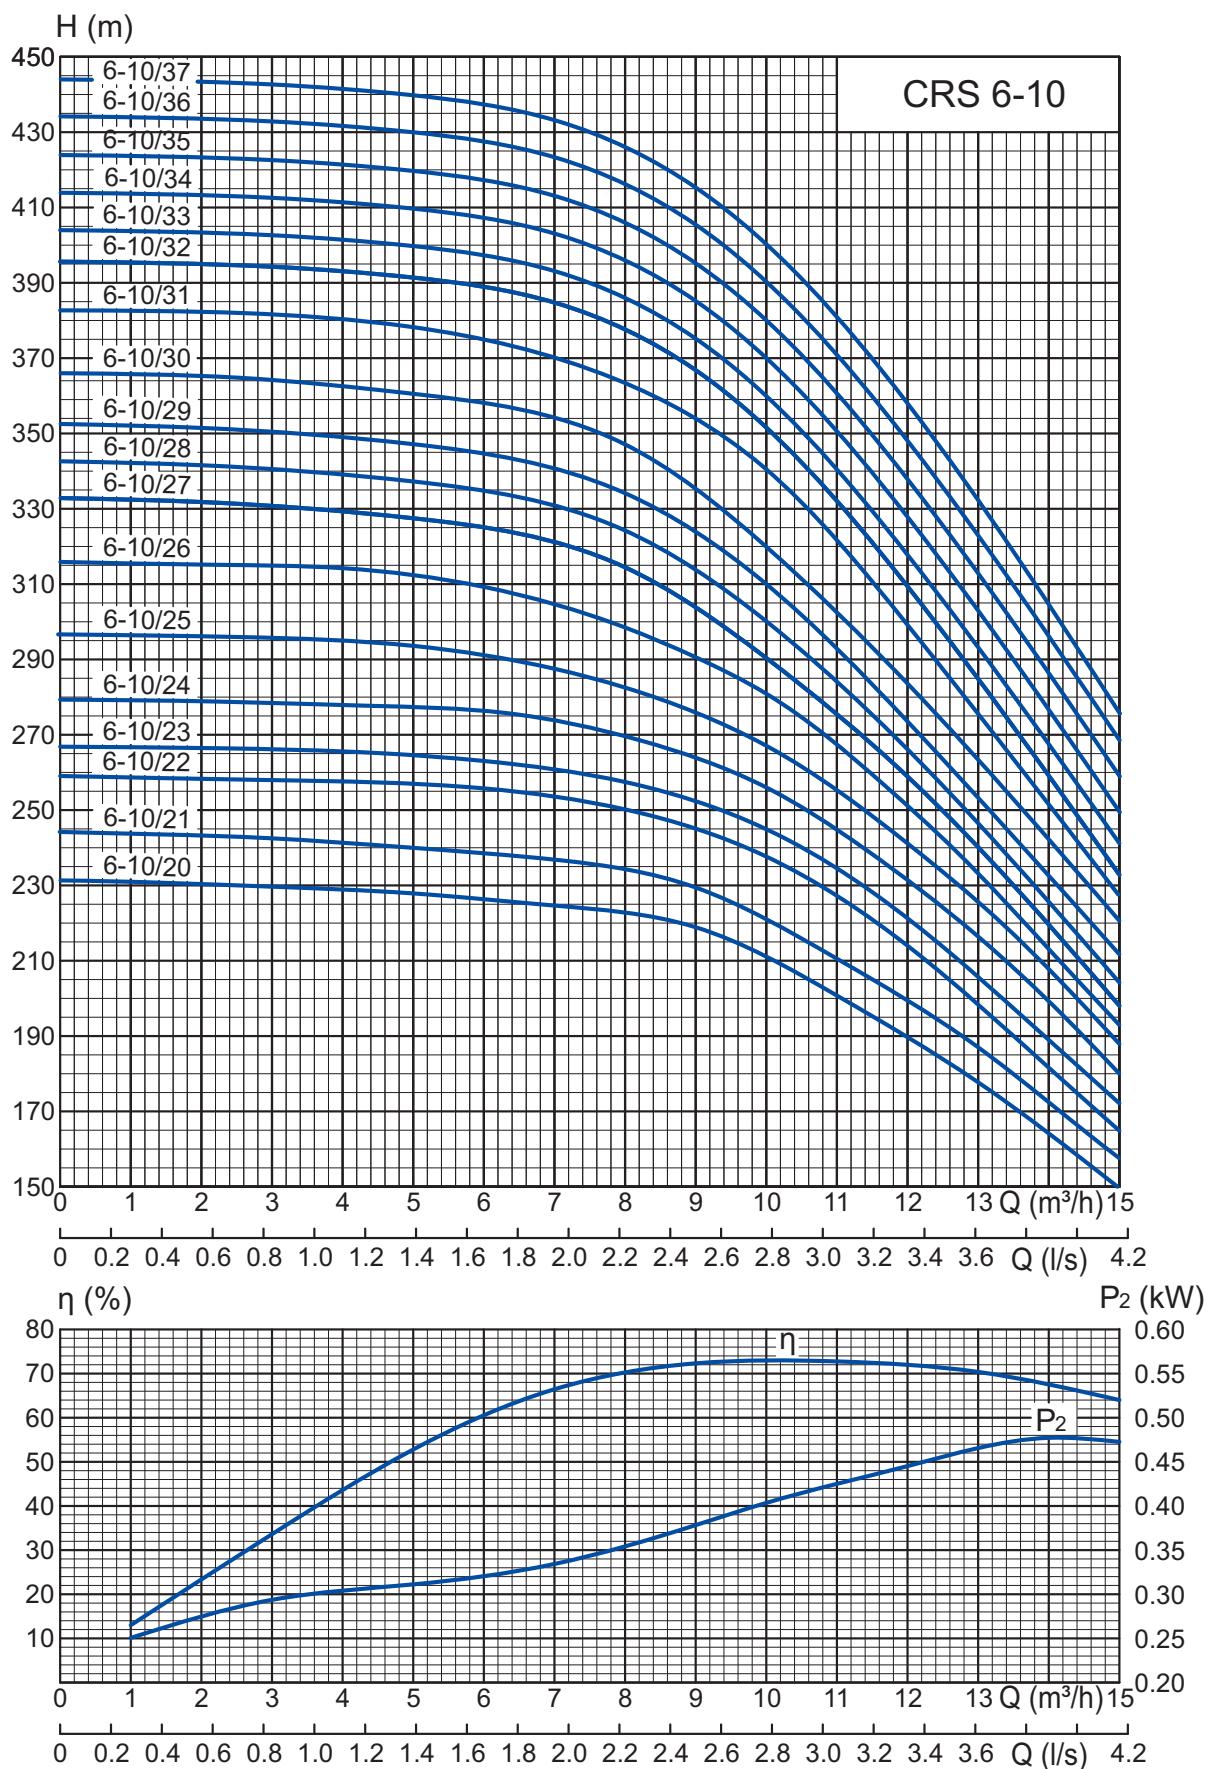


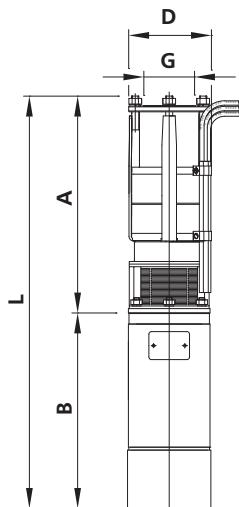HMS CIRIS 6-16


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 6-16/2-3	DAP 6-3	3	144	1000	403	597		64
CRS 6-16/3-3	DAP 6-3	3	144	1050	453	597		65
CRS 6-16/4-3	DAP 6-3	3	144	1100	503	597		66
CRS 6-16/5-3	DAP 6-3	3	144	1150	553	597		67
CRS 6-16/6-3	DAP 6-3	3	144	1200	603	597		68
CRS 6-16/7-4	DAP 6-4	4	144	1270	649	621		70
CRS 6-16/8-5.5	DAP 6-5.5	5.5	144	1340	699	641		73
CRS 6-16/9-5.5	DAP 6-5.5	5.5	144	1420	714	706		80
CRS 6-16/10-7.5	DAP 6-7.5	7.5	144	1430	724	706		73
CRS 6-16/11-7.5	DAP 6-7.5	7.5	144	1520	814	706		86
CRS 6-16/12-7.5	DAP 6-7.5	7.5	144	1570	864	706		87
CRS 6-16/13-7.5	DAP 6-7.5	7.5	144	1620	914	706		88
CRS 6-16/14-9	DAP 6-9	9	144	1690	959	731		91
CRS 6-16/15-9	DAP 6-9	9	144	1730	999	731	G 2½ " - B	92
CRS 6-16/16-11	DAP 6-11	11	144	1830	1064	766	GOST 6357 standard	97
CRS 6-16/17-13	DAP 6-13	13	144	1940	1119	821		103
CRS 6-16/18-13	DAP 6-13	13	144	1970	1149	821		104
CRS 6-16/19-13	DAP 6-13	13	144	2000	1179	821		105
CRS 6-16/20-13	DAP 6-13	13	144	2030	1209	821		106
CRS 6-16/21-15	DAP 6-15	15	144	2090	1229	861		111
CRS 6-16/22-15	DAP 6-15	15	144	2135	1274	861		112
CRS 6-16/23-15	DAP 6-15	15	144	2180	1319	861		113
CRS 6-16/24-15	DAP 6-15	15	144	2220	1359	861		114
CRS 6-16/25-18.5	DAP 6-18.5	18.5	144	2310	1404	906		120
CRS 6-16/26-18.5	DAP 6-18.5	18.5	144	2350	1444	906		121
CRS 6-16/27-18.5	DAP 6-18.5	18.5	144	2395	1489	906		122
CRS 6-16/28-18.5	DAP 6-18.5	18.5	144	2440	1534	906		123
CRS 6-16/29-18.5	DAP 6-18.5	18.5	144	2480	1574	906		124
CRS 6-16/30-18.5	DAP 6-18.5	18.5	144	2520	1614	906		125

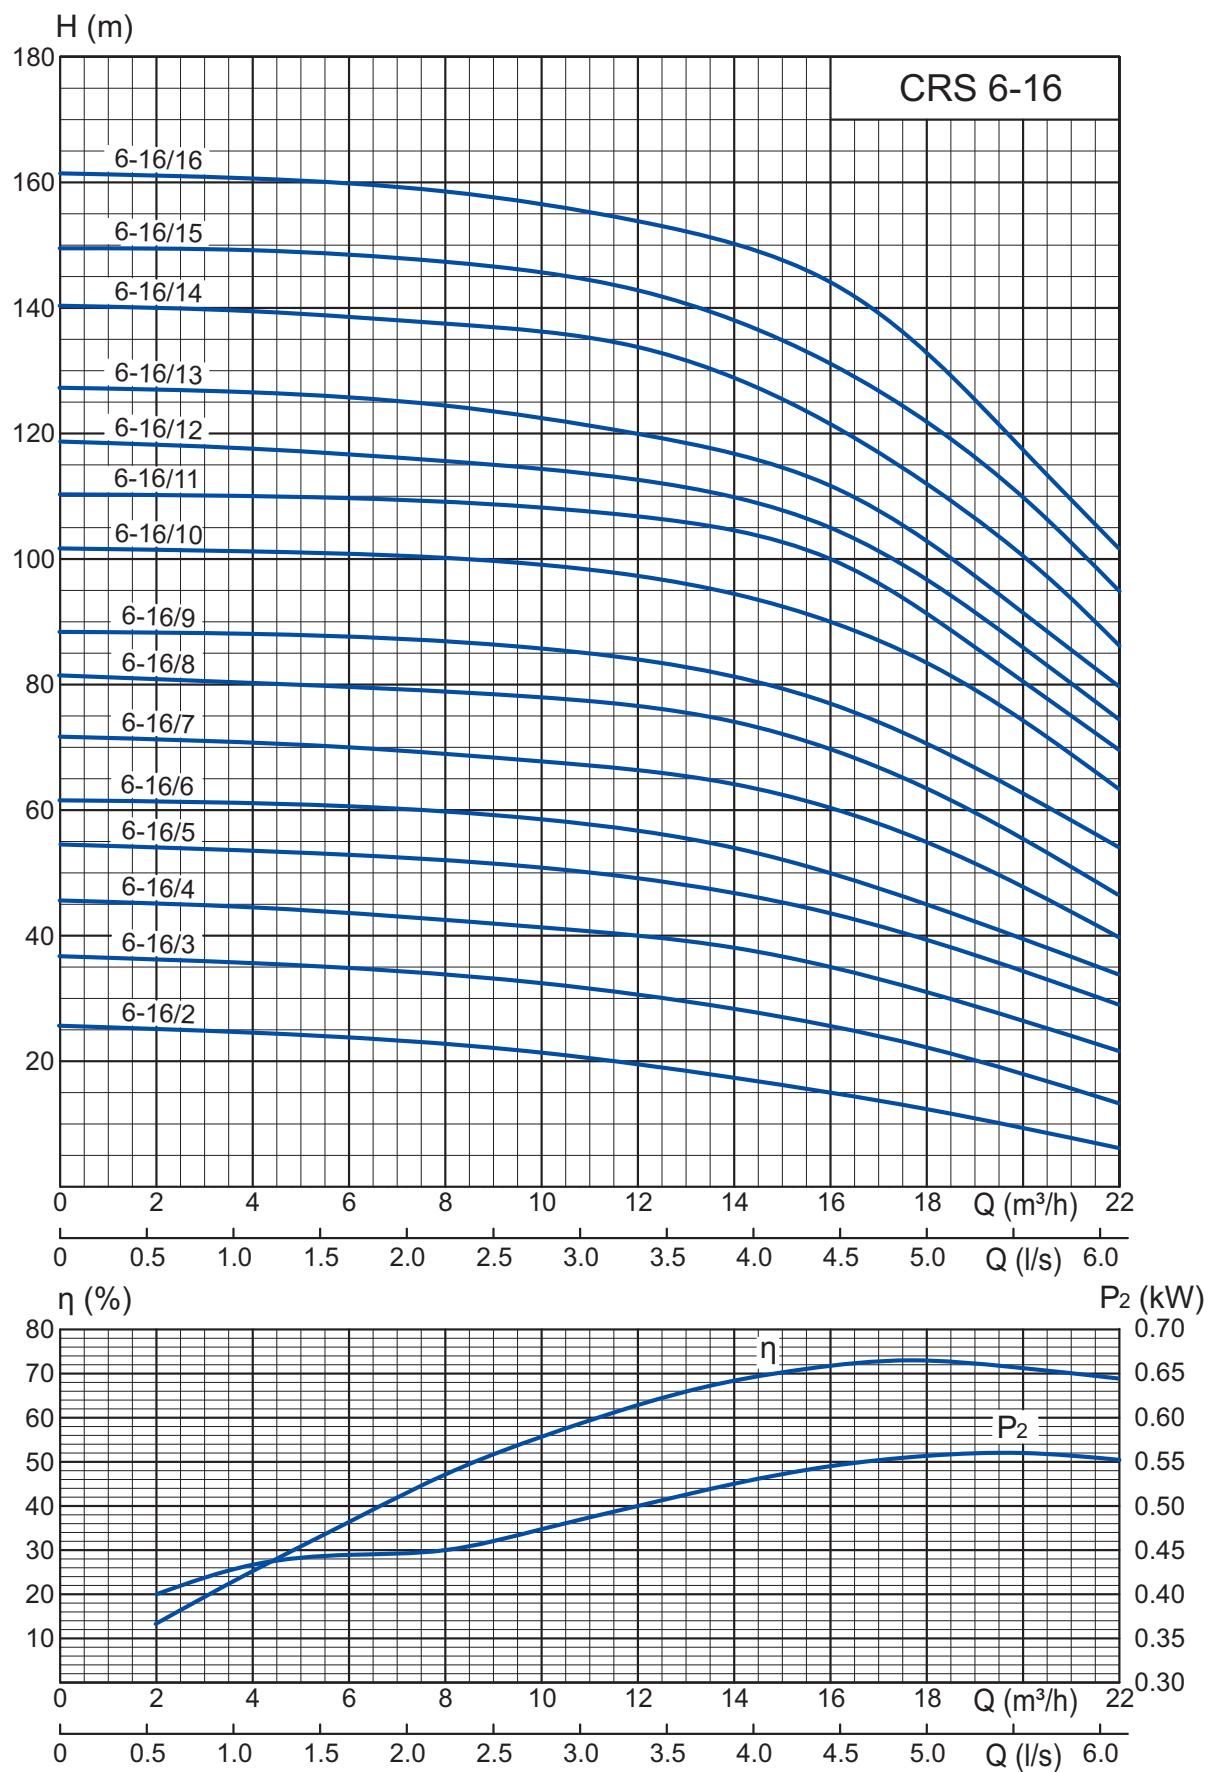


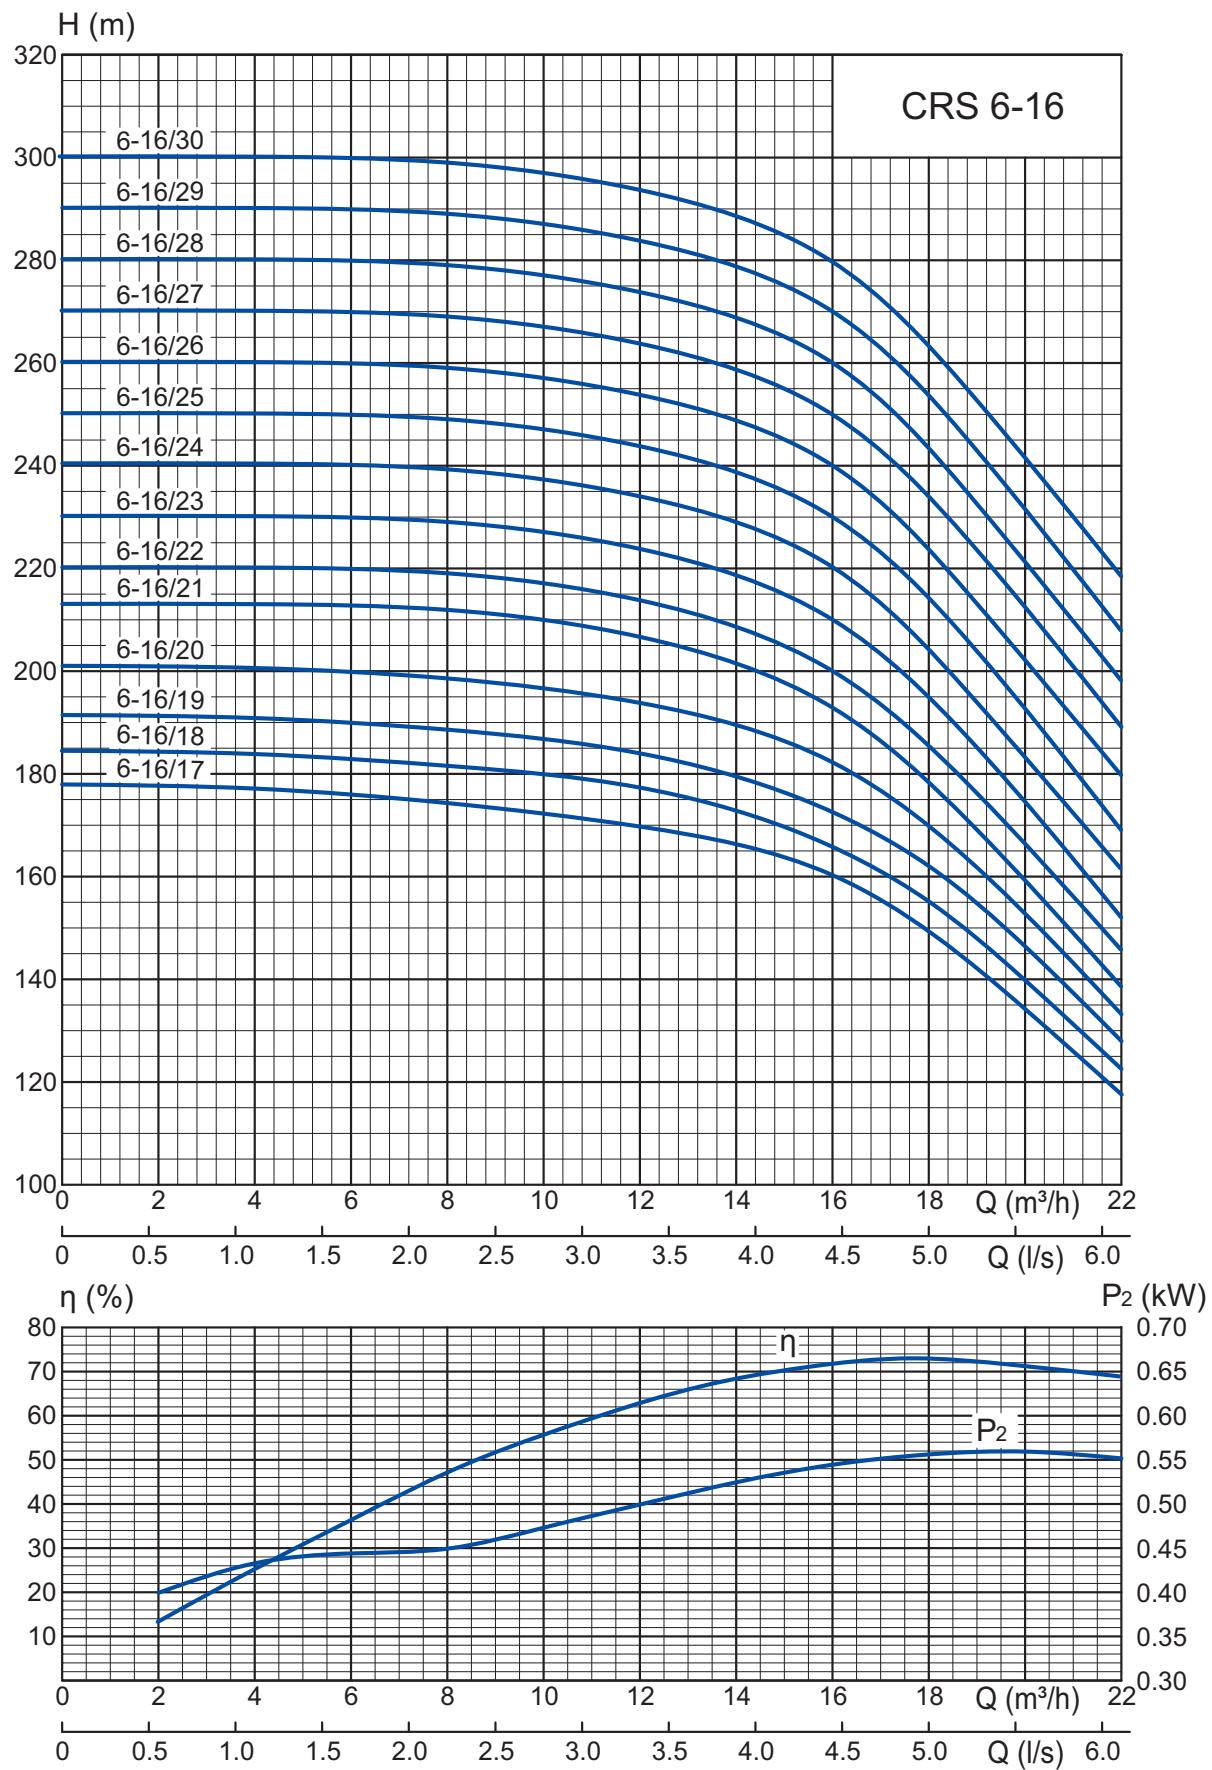

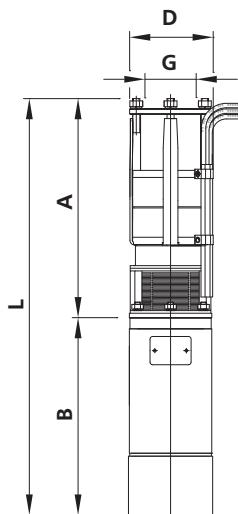HMS CIRIS 6-25


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 6-25/2-3	DAP 6-3	3	144	970	373	597		64
CRS 6-25/3-3	DAP 6-3	3	144	1020	423	597		65
CRS 6-25/4-3	DAP 6-3	3	144	1070	473	597		66
CRS 6-25/5-4	DAP 6-4	4	144	1150	529	621		70
CRS 6-25/6-5.5	DAP 6-5.5	5.5	144	1220	579	641		73
CRS 6-25/8-7.5	DAP 6-7.5	7.5	144	1400	694	706		81
CRS 6-25/9-7.5	DAP 6-7.5	7.5	144	1460	754	706		82
CRS 6-25/10-7.5	DAP 6-7.5	7.5	144	1500	794	706		84
CRS 6-25/11-9	DAP 6-9	9	144	1570	839	731	SP-89-D	87
CRS 6-25/13-11	DAP 6-11	11	144	1750	984	766	GOST 633 standard	93
CRS 6-25/14-11	DAP 6-11	11	144	1800	1034	766	- see adaptors p.p. 60-61	94
CRS 6-25/15-13	DAP 6-13	13	144	1870	1049	821		101
CRS 6-25/16-13	DAP 6-13	13	144	1920	1099	821		103
CRS 6-25/17-15	DAP 6-15	15	144	2010	1149	861		108
CRS 6-25/18-15	DAP 6-15	15	144	2060	1199	861		110
CRS 6-25/19-15	DAP 6-15	15	144	2110	1249	861		111
CRS 6-25/20-18.5	DAP 6-18.5	18.5	144	2210	1304	906		117
CRS 6-25/21-18.5	DAP 6-18.5	18.5	144	2260	1354	906		119
CRS 6-25/22-18.5	DAP 6-18.5	18.5	144	2310	1404	906		120
CRS 6-25/23-18.5	DAP 6-18.5	18.5	144	2360	1454	906		121

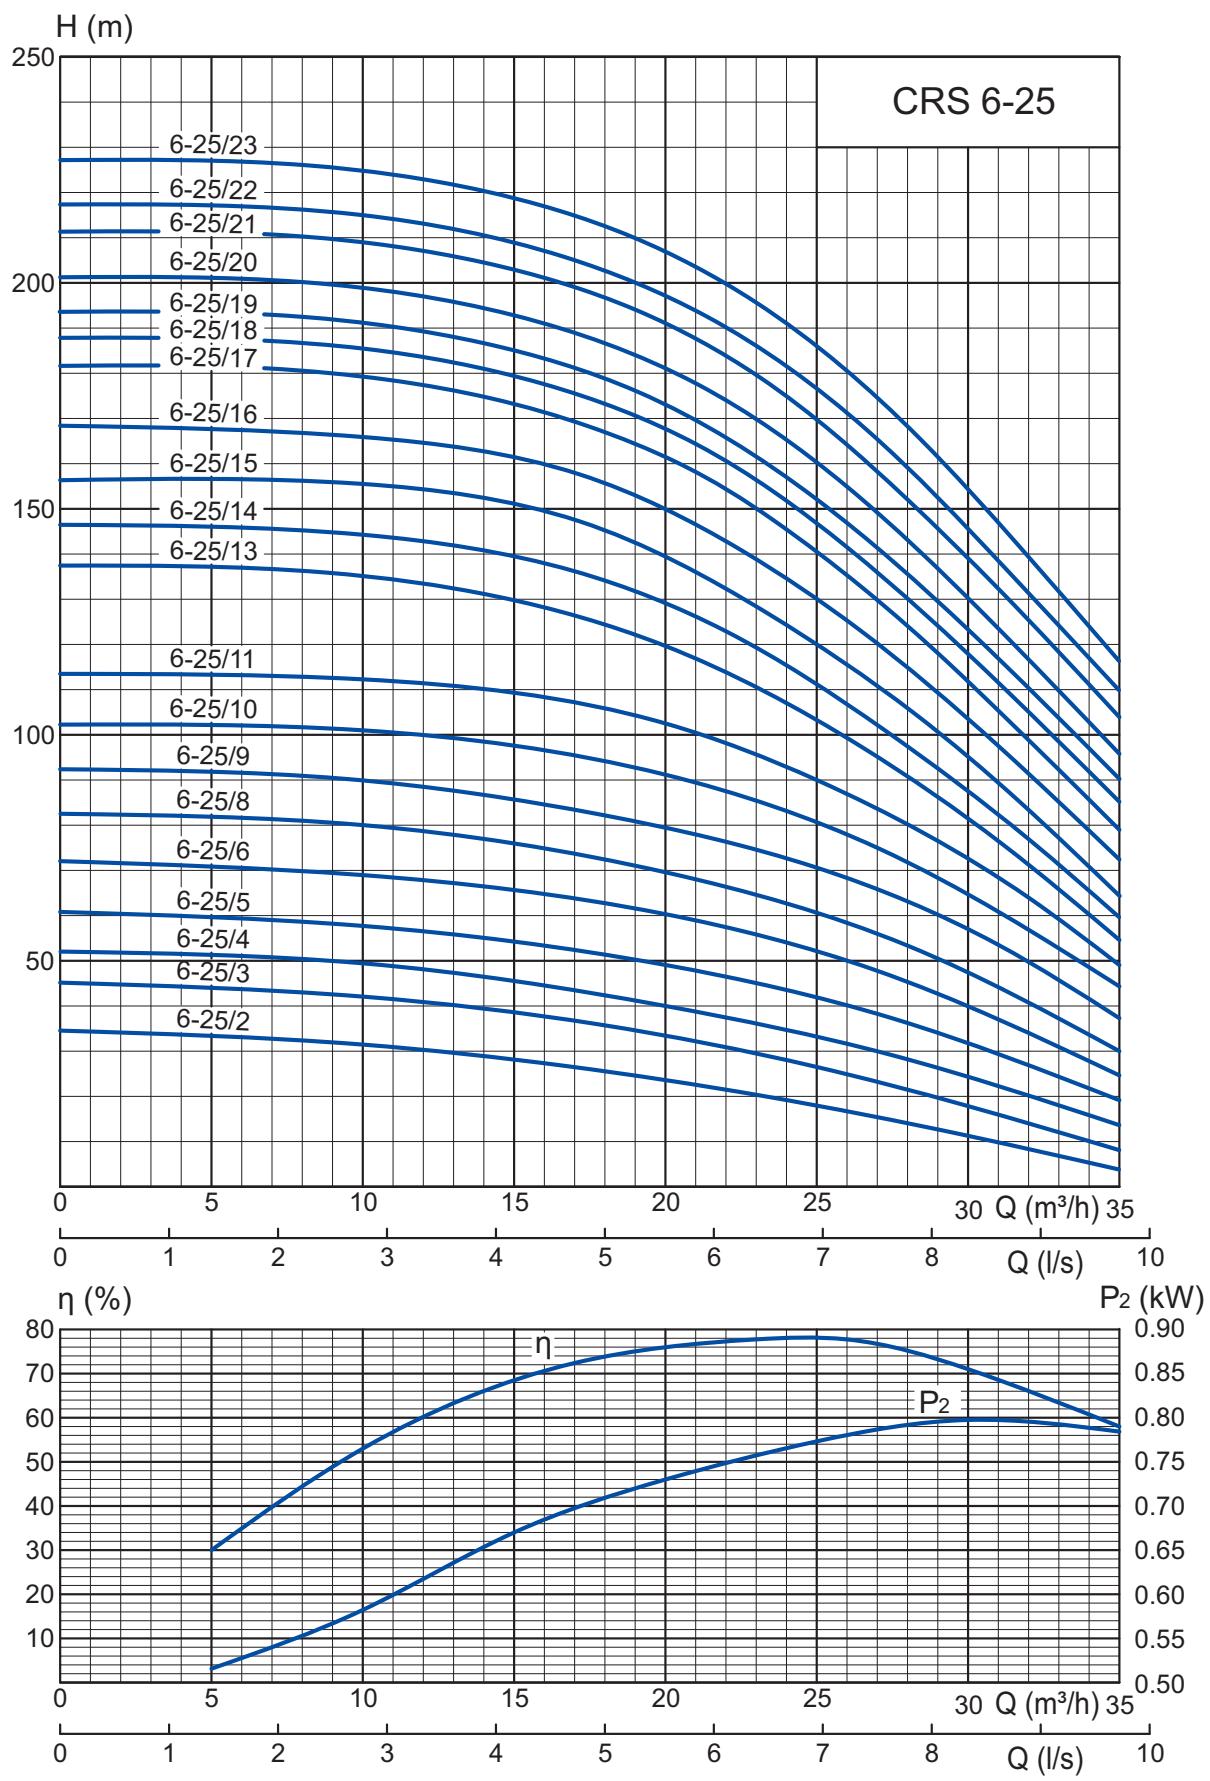

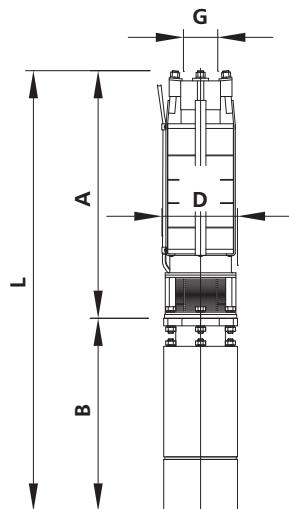
HMS CIRIS 8-16


Flanged Connection (option)


DN80

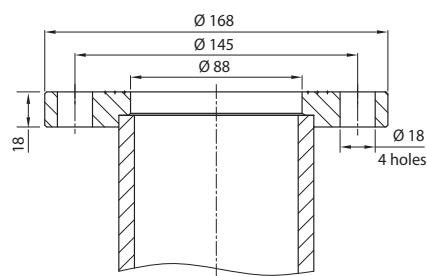

Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 8-16/1-3	DAP 6-3	3	189	890	293	597		92
CRS 8-16/2-3	DAP 6-3	3	189	950	353	597		94
CRS 8-16/3-4	DAP 6-4	4	189	1025	404	621		98
CRS 8-16/4-5.5	DAP 6-5.5	5.5	189	1095	454	641		102
CRS 8-16/5-7.5	DAP 6-7.5	7.5	189	1220	514	706		111
CRS 8-16/6-9	DAP 6-9	9	189	1290	559	731		115
CRS 8-16/7-13	DAP 6-13		189	1450	629	821		126
	DAP 8-13			1385	629	756		147
CRS 8-16/8-13	DAP 6-13		189	1550	729	821		128
	DAP 8-13			1485	729	756		149
CRS 8-16/9-15	DAP 6-15		189	1600	739	861		134
	DAP 8-15			1520	739	781		156
CRS 8-16/10-15	DAP 6-15		189	1675	814	861		136
	DAP 8-15			1600	819	781		158
CRS 8-16/11-18.5	DAP 6-18.5		189	1780	874	906		143
	DAP 8-18.5	18.5		1670	874	796		163
CRS 8-16/12-18.5	DAP 6-18.5		189	1835	929	906		145
	DAP 8-18.5	18.5		1725	929	796		165
CRS 8-16/13-22	DAP 8-22	22	189	1860	984	876		184
CRS 8-16/14-22	DAP 8-22	22	189	1920	1044	876		186
CRS 8-16/15-26	DAP 8-26	26	189	2010	1099	911		196
CRS 8-16/16-26	DAP 8-26	26	189	2065	1154	911		198
CRS 8-16/17-30	DAP 8-30	30	189	2160	1214	946		207
CRS 8-16/18-30	DAP 8-30	30	189	2215	1269	946		209
CRS 8-16/19-37	DAP 8-37	37	189	2345	1324	1021		231
CRS 8-16/20-37	DAP 8-37	37	189	2400	1379	1021		233
CRS 8-16/21-37	DAP 8-37	37	189	2455	1434	1021		235
CRS 8-16/22-37	DAP 8-37	37	189	2515	1494	1021		237
CRS 8-16/23-45	DAP 8-45	45	189	2685	1549	1136		262
CRS 8-16/24-45	DAP 8-45	45	189	2740	1604	1136		264
CRS 8-16/25-45	DAP 8-45	45	189	2800	1664	1136		266
CRS 8-16/26-45	DAP 8-45	45	189	2855	1719	1136		268
CRS 8-16/27-45	DAP 8-45	45	189	2910	1774	1136		270

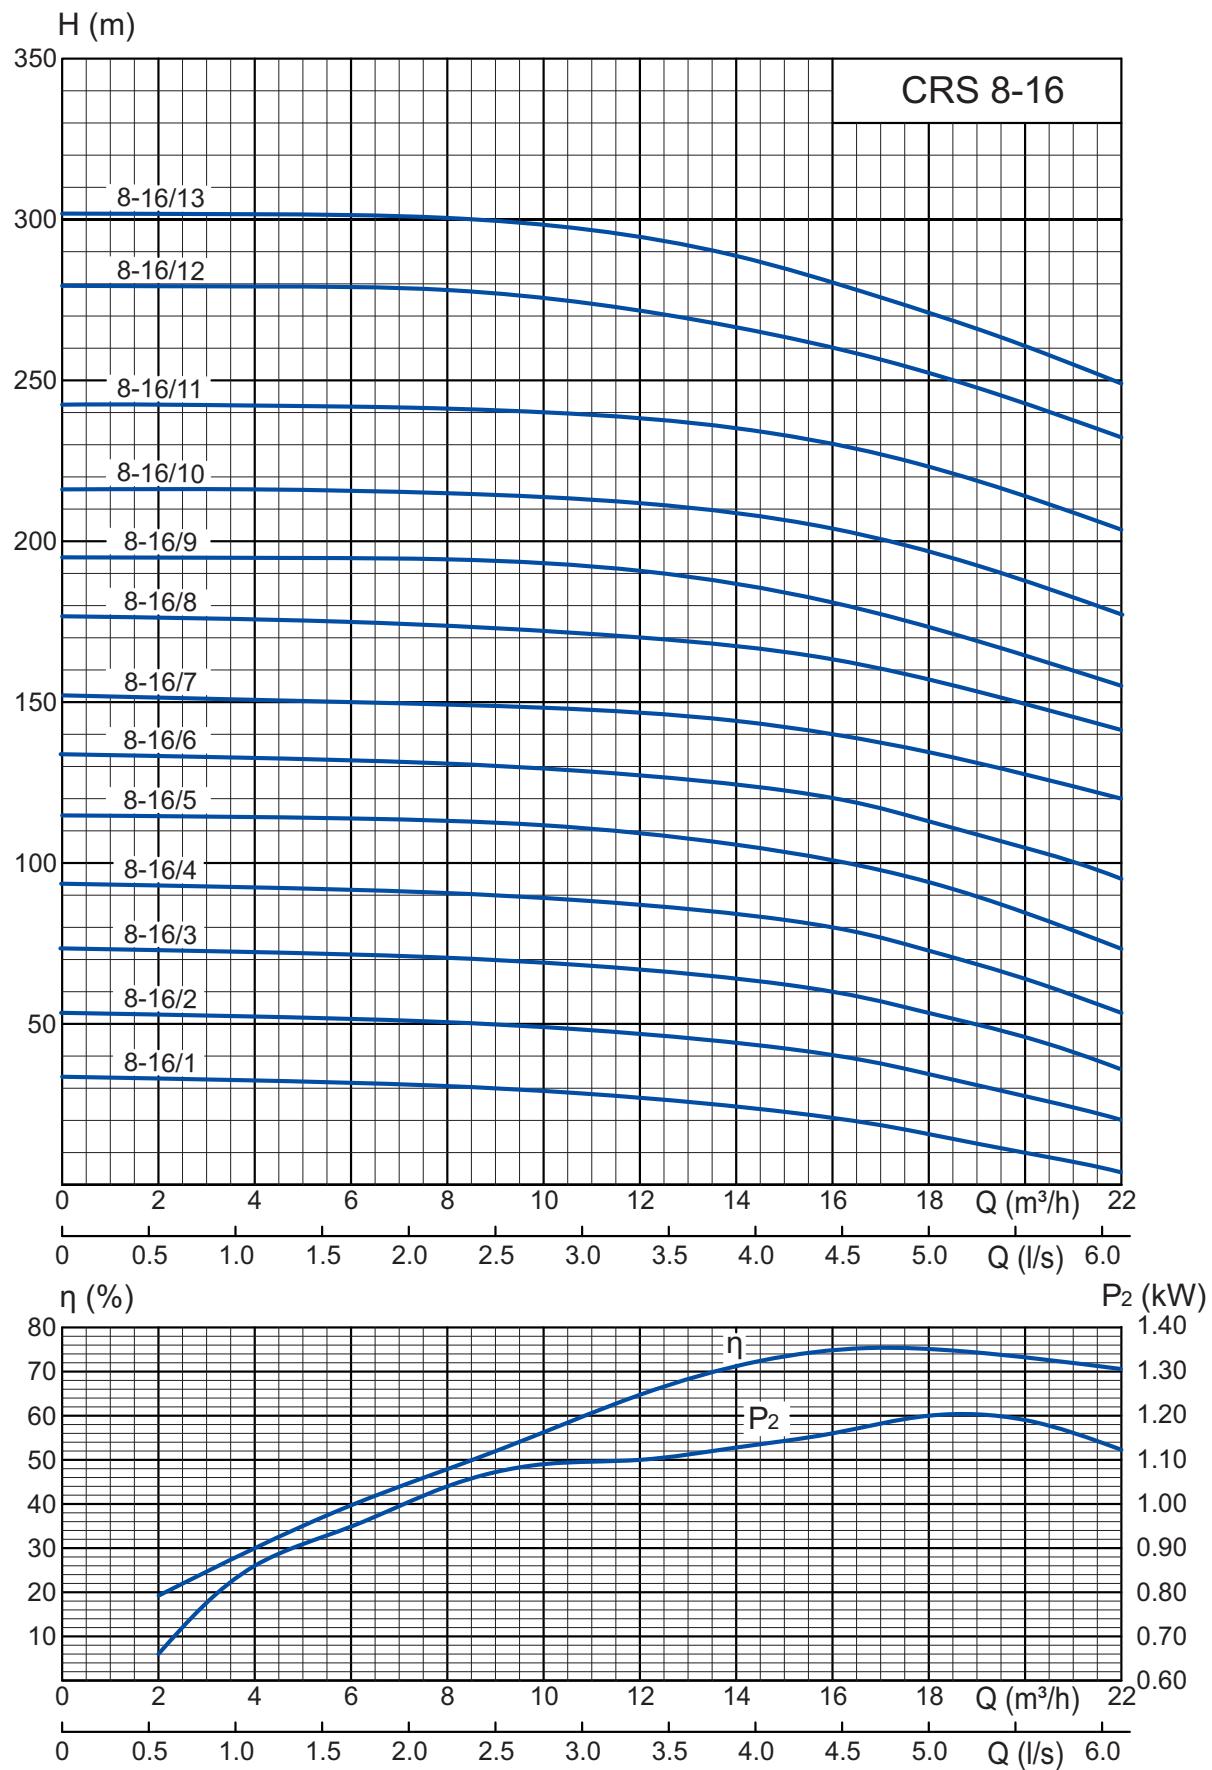


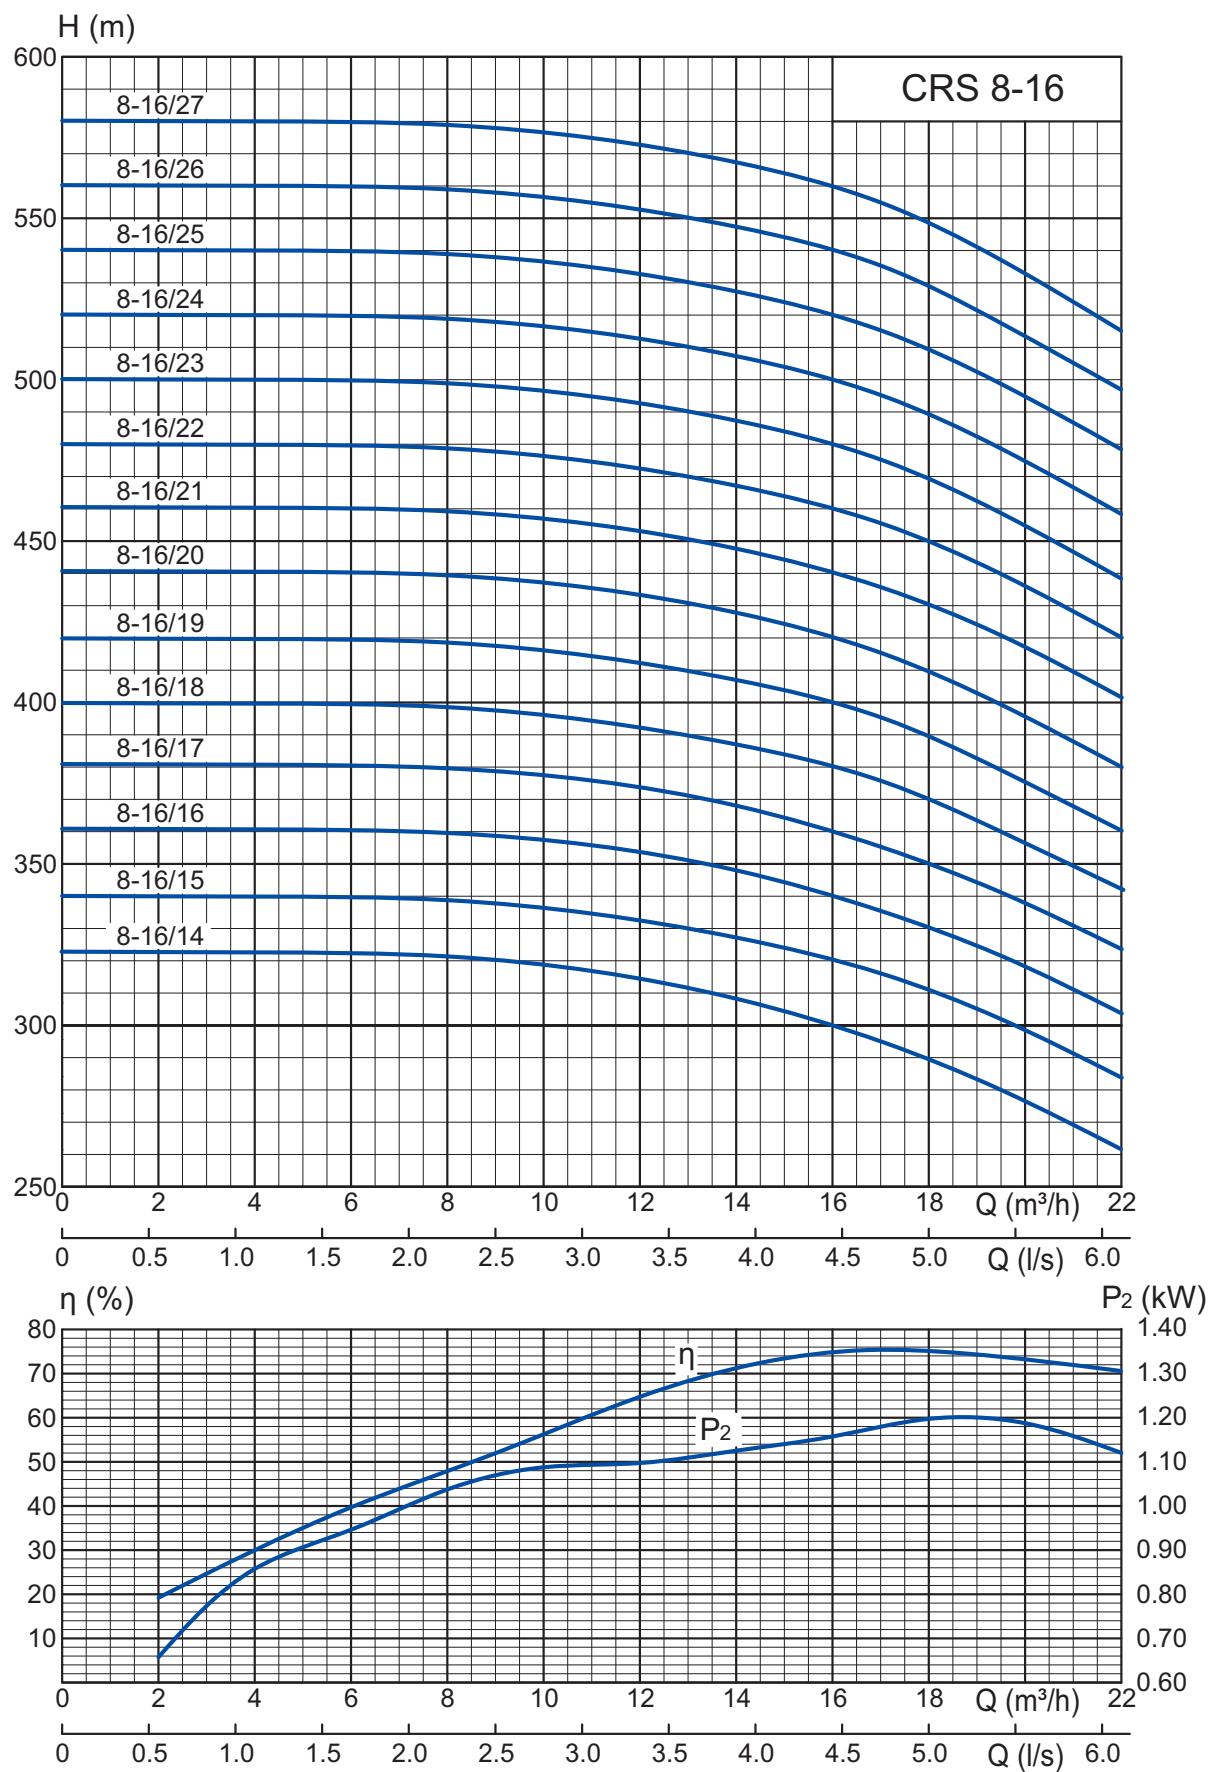

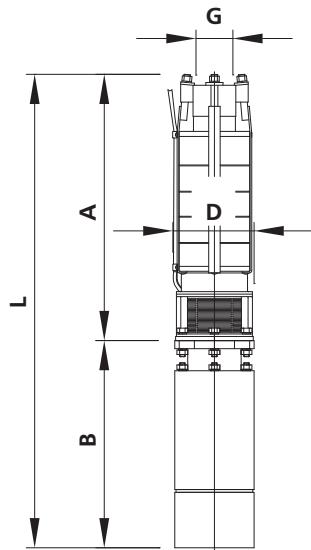
HMS CIRIS 8-25


Flanged Connection (option)

DN80

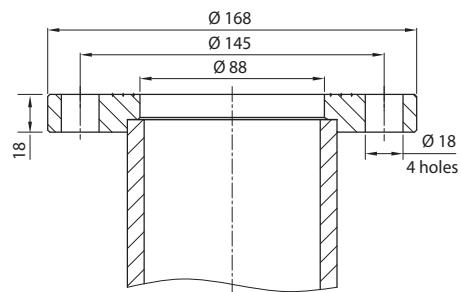


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 8-25/1-3	DAP 6-3	3	189	915	318	597		90
CRS 8-25/2-4	DAP 6-4	4	189	995	374	621		94
CRS 8-25/3-5.5	DAP 6-5.5	5.5	189	1070	429	641		98
CRS 8-25/4-7.5	DAP 6-7.5	7.5	189	1190	484	706		107
CRS 8-25/5-9	DAP 6-9	9	189	1270	539	731		111
CRS 8-25/6-11	DAP 6-11	11	189	1360	594	766		117
CRS 8-25/7-13	DAP 6-13	13	189	1481	660	821		124
CRS 8-25/8-15	DAP 6-15	15	189	1570	709	861		130
	DAP 8-15			1490	709	781		152
CRS 8-25/9-18.5	DAP 6-18.5	18.5	189	1680	774	906		137
	DAP 8-18.5			1570	774	796		157
CRS 8-25/10-18.5	DAP 6-18.5	18.5	189	1730	824	906	G 3 " - B GOST 6357 standard	139
	DAP 8-18.5			1620	824	796		159
CRS 8-25/11-22	DAP 8-22	22	189	1760	884	876		178
CRS 8-25/12-22	DAP 8-22	22	189	1820	944	876		180
CRS 8-25/13-22	DAP 8-22	22	189	1865	989	876		182
CRS 8-25/14-30	DAP 8-30	30	189	2140	1194	946		199
CRS 8-25/15-30	DAP 8-30	30	189	2195	1249	946		201
CRS 8-25/16-30	DAP 8-30	30	189	2245	1299	946		203
CRS 8-25/17-37	DAP 8-37	37	189	2245	1224	1021		225
CRS 8-25/18-37	DAP 8-37	37	189	2295	1274	1021		227
CRS 8-25/19-37	DAP 8-37	37	189	2365	1344	1021		229
CRS 8-25/20-45	DAP 8-45	45	189	2550	1414	1136		254
CRS 8-25/21-45	DAP 8-45	45	189	2620	1484	1136		256

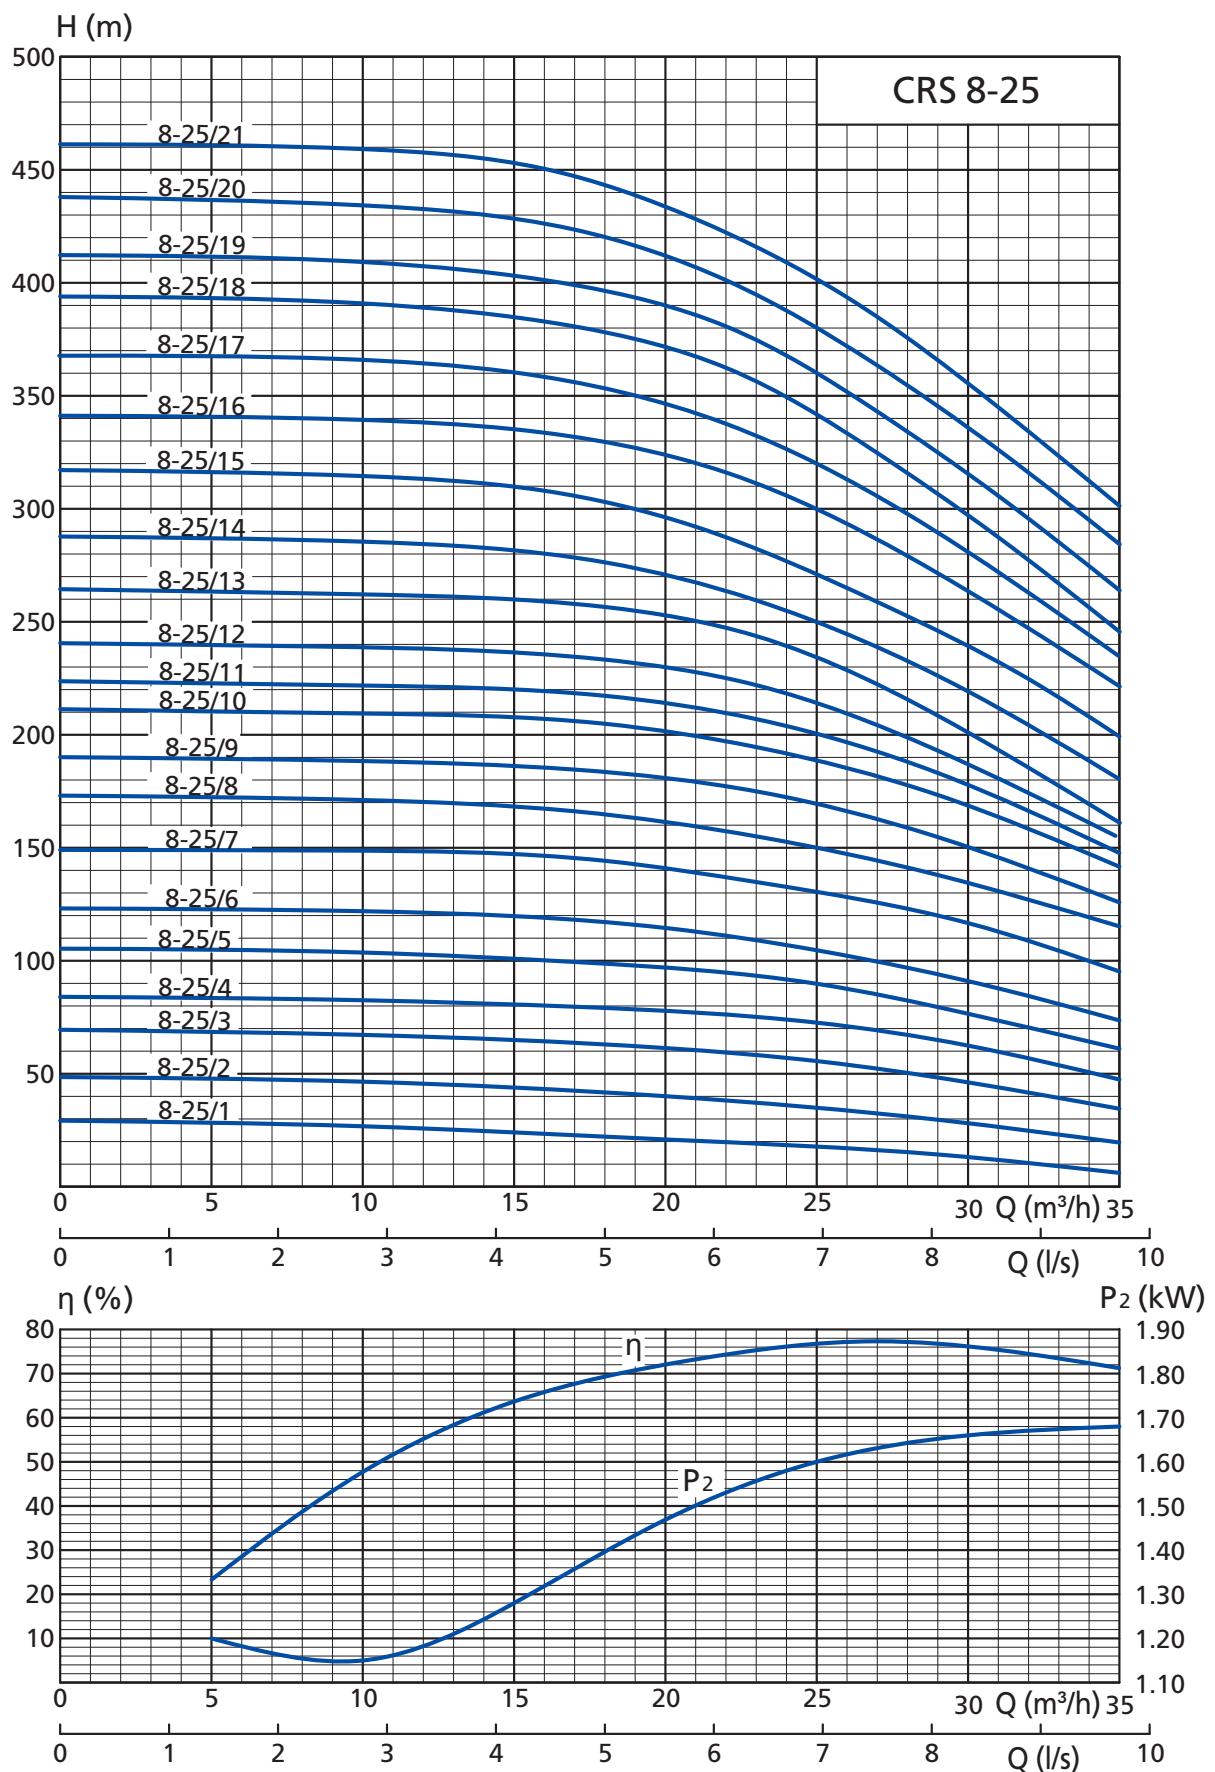

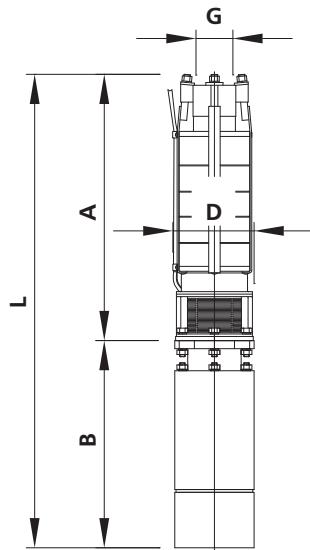
HMS CIRIS 8-40


Flanged Connection (option)

DN80

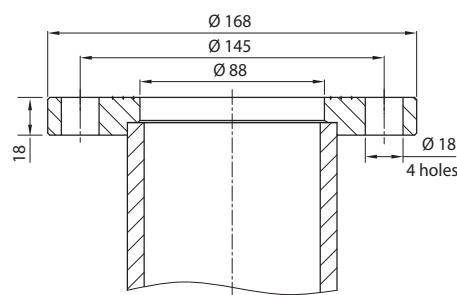



Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 8-40/1-3	DAP 6-3	3	189	970	373	597		60/62
CRS 8-40/2-5.5	DAP 6-5.5	5.5	189	1075	434	641		67/69
CRS 8-40/3-7.5	DAP 6-7.5	7.5	189	1200	494	706		76/78
CRS 8-40/4-11	DAP 6-11	11	189	1310	544	766		85/88
CRS 8-40/5-13	DAP 6-13	13	189	1425	604	821		93/96
CRS 8-40/6-15	DAP 6-15	15	189	1440	579	861		100/103
	DAP 8-15			1360	579	781		122/128
CRS 8-40/7-22	DAP 8-22	22	189	1650	774	876	G 3 " - B	146/152
CRS 8-40/8-22	DAP 8-22	22	189	1670	794	876	GOST 6357 standard	149/155
CRS 8-40/9-30	DAP 8-30	30	189	1790	844	946		168/174
CRS 8-40/10-30	DAP 8-30	30	189	1850	904	946		171/177
CRS 8-40/11-30	DAP 8-30	30	189	1920	974	946		174/180
CRS 8-40/12-37	DAP 8-37	37	189	2055	1034	1021		197/204
CRS 8-40/13-37	DAP 8-37	37	189	2115	1094	1021		201/208
CRS 8-40/14-45	DAP 8-45	45	189	2290	1154	1136		227/235
CRS 8-40/15-45	DAP 8-45	45	189	2350	1214	1136		230/238
CRS 8-40/16-45	DAP 8-45	45	189	2410	1274	1136		233/242

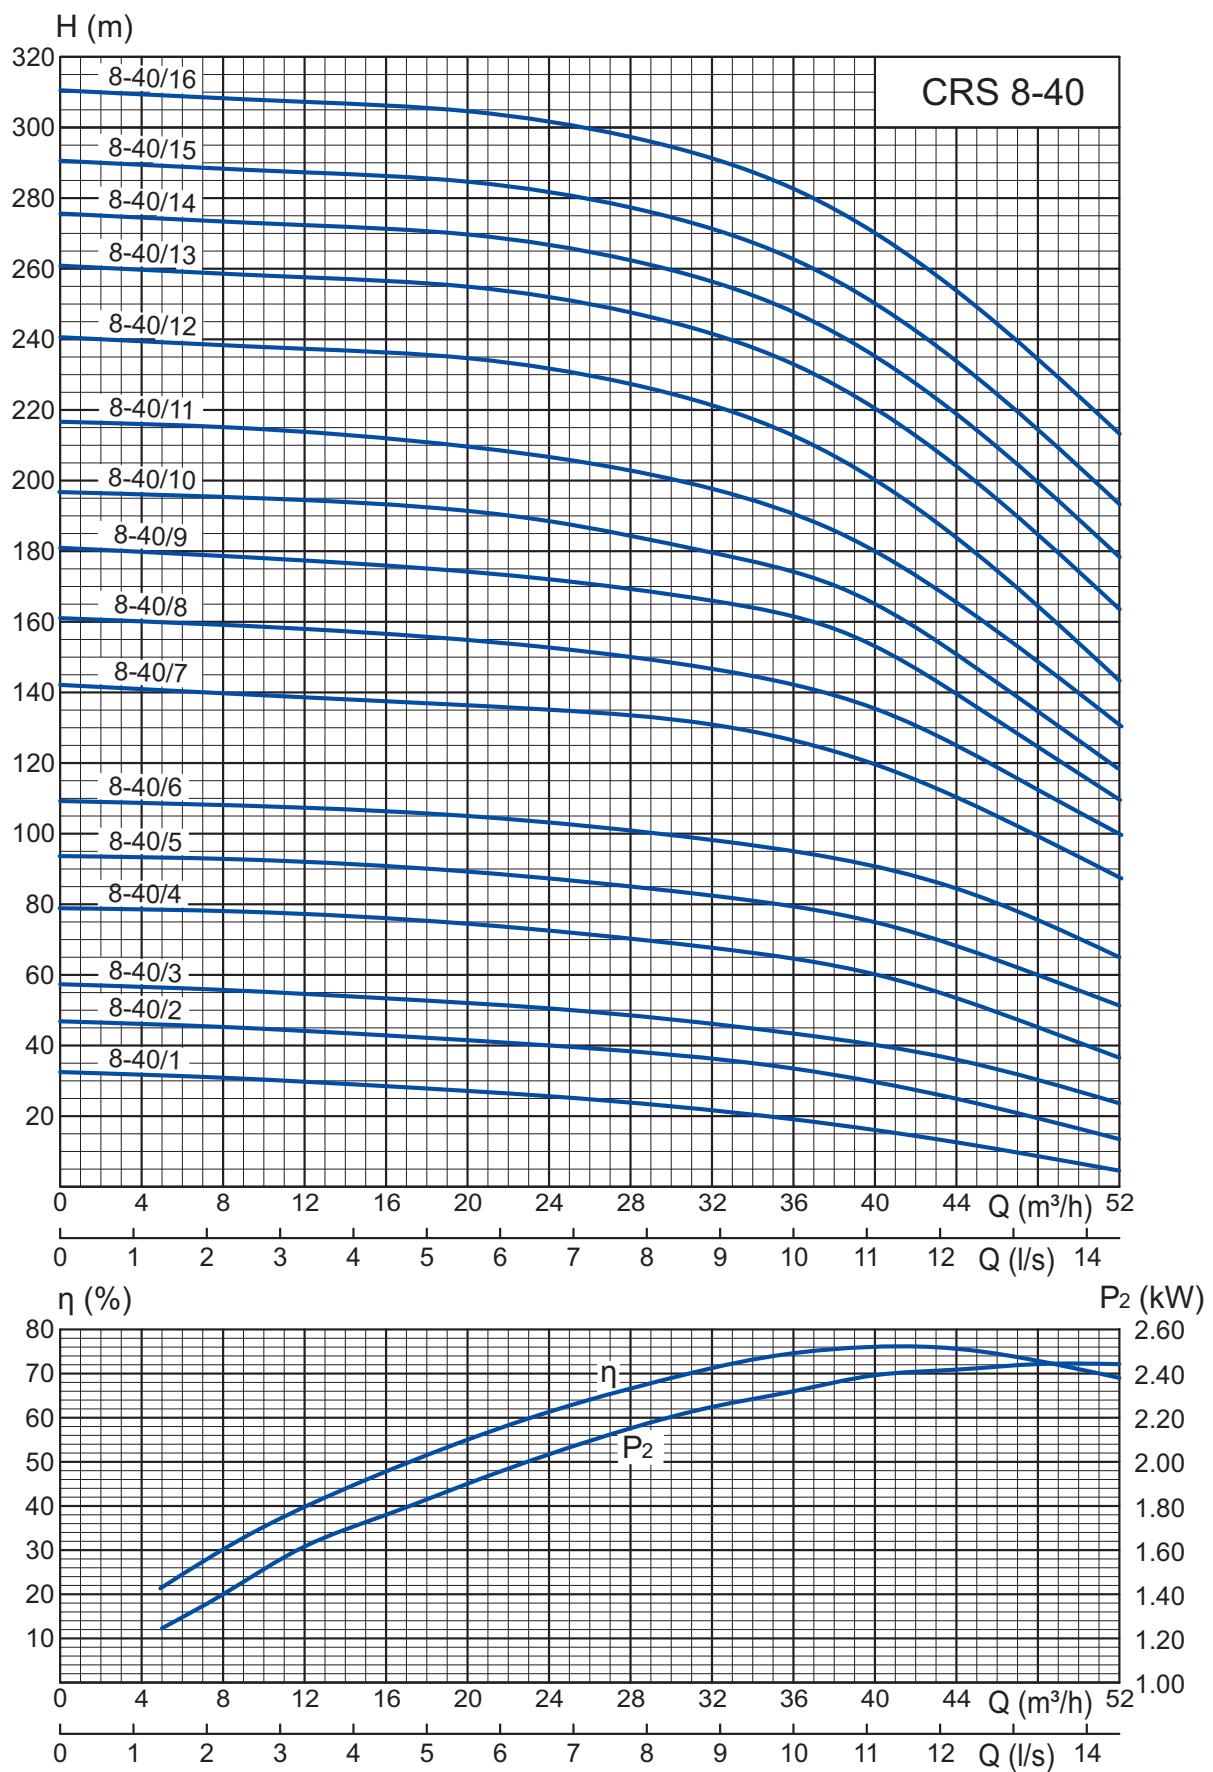

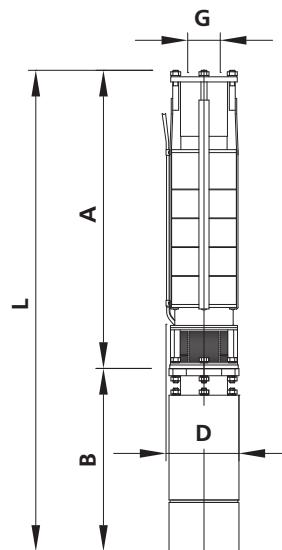HMS CIRIS 8-65


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 8-65/2-7.5	DAP 6-7.5	7.5	189	1165	459	706		90
CRS 8-65/3-18.5	DAP 6-18.5	18.5	189	1440	534	906		114
	DAP 8-18.5			1330	534	796		134
CRS 8-65/4-18.5	DAP 6-18.5	18.5	189	1520	614	906		118
	DAP 8-18.5			1410	614	796		138
CRS 8-65/5-22	DAP 8-22	22	189	1680	804	876	SP-114-D	159
CRS 8-65/6-22	DAP 8-22	22	189	1755	879	876	GOST 633 standard - see adaptors p.p. 60-61	163
CRS 8-65/7-30	DAP 8-30	30	189	1960	1014	946		182
CRS 8-65/8-37	DAP 8-37	37	189	2165	1144	1021		206
CRS 8-65/9-37	DAP 8-37	37	189	2235	1214	1021		210
CRS 8-65/10-37	DAP 8-37	37	189	2315	1294	1021		214
CRS 8-65/11-37	DAP 8-37	37	189	2390	1369	1021		218
CRS 8-65/12-45	DAP 8-45	45	189	2585	1449	1136		245
CRS 8-65/13-45	DAP 8-45	45	189	2665	1529	1136		249

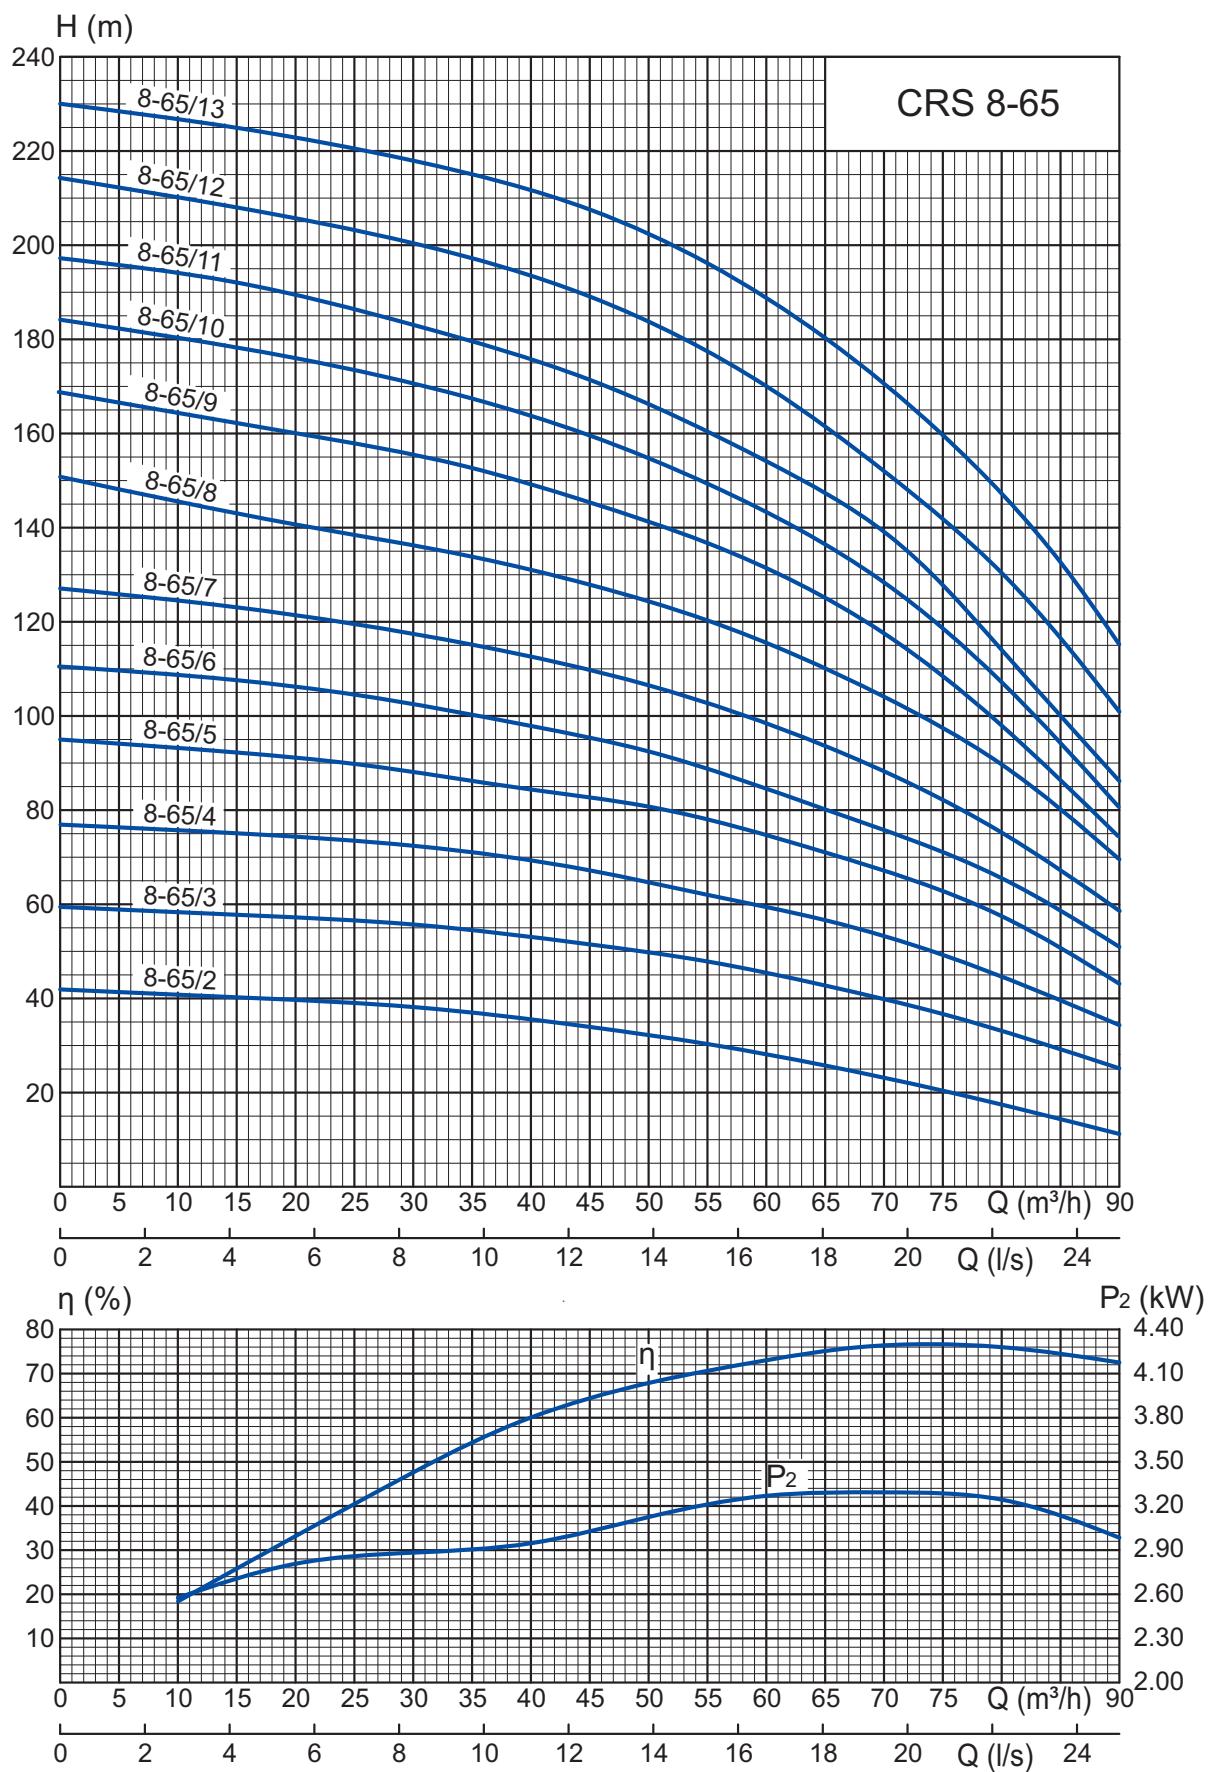

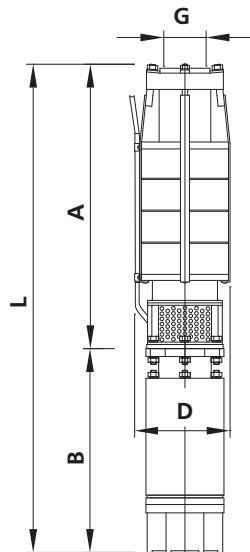
**HMS CIRIS 10-65,
HMS CIRIS 10-77**



Flanged Connection (option)


DN100

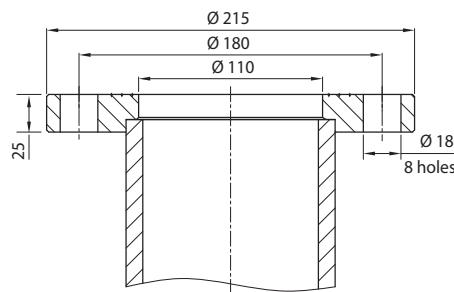


Pump	Electric motor		Dimensions, mm					Weight, kg
	Type	Power, kW	D	L	A	B	G	
CRS 10-65/2-22	DAP 8-22	22	235	1410	534	876		154
CRS 10-65/3A-26	DAP 8-26	26	235	1530	619	911		164
CRS 10-65/4A-30	DAP 10-30	30	235	1570	693	877		210
	DAP 8-30		235	1640	694	946		187
CRS 10-65/4-37	DAP 10-37	37	235	1660	758	902		220
	DAP 8-37		235	1780	759	1021		209
CRS 10-65/5A-45	DAP 10-45	45	235	1730	763	967		245
	DAP 8-45		235	1900	764	1136		240
CRS 10-65/6A-45	DAP 10-45	45	235	1820	853	967		254
	DAP 8-45		235	1990	854	1136		249
CRS 10-65/6-55	DAP 10-55	55	235	1875	858	1017	SP-114-D	266
CRS 10-65/7-55	DAP 10-55	55	235	1950	933	1017		273
CRS 10-65/8-65	DAP 10-65	65	235	2100	1018	1082	GOST 633 standard	302
CRS 10-65/9-75	DAP 10-75	75	235	2255	1098	1157		333
CRS 10-65/10-90	DAP 10-90	90	235	2455	1178	1277	- see adaptors p.p. 60-61	379
CRS 10-65/11-90	DAP 10-90	90	235	2535	1258	1277		388
CRS 10-65/12-110	DAP 10-110	110	235	2655	1338	1317		408
CRS 10-65/13-110	DAP 10-110	110	235	2740	1423	1317		417
CRS 10-65/14-130	DAP 10-130	130	235	3040	1503	1537		493
CRS 10-77/2-30	DAP 10-130	130	235	3120	1583	1537		502
	DAP 10-30		235	1411	534	877		169
	DAP 8-30		235	1481	535	946		192
CRS 10-77/3-37	DAP 10-37	37	235	1521	619	902		202
	DAP 8-37		235	1642	620	1021		191
CRS 10-77/4-45	DAP 10-45	45	235	1725	758	967		237
	DAP 8-45		235	1895	759	1136		232

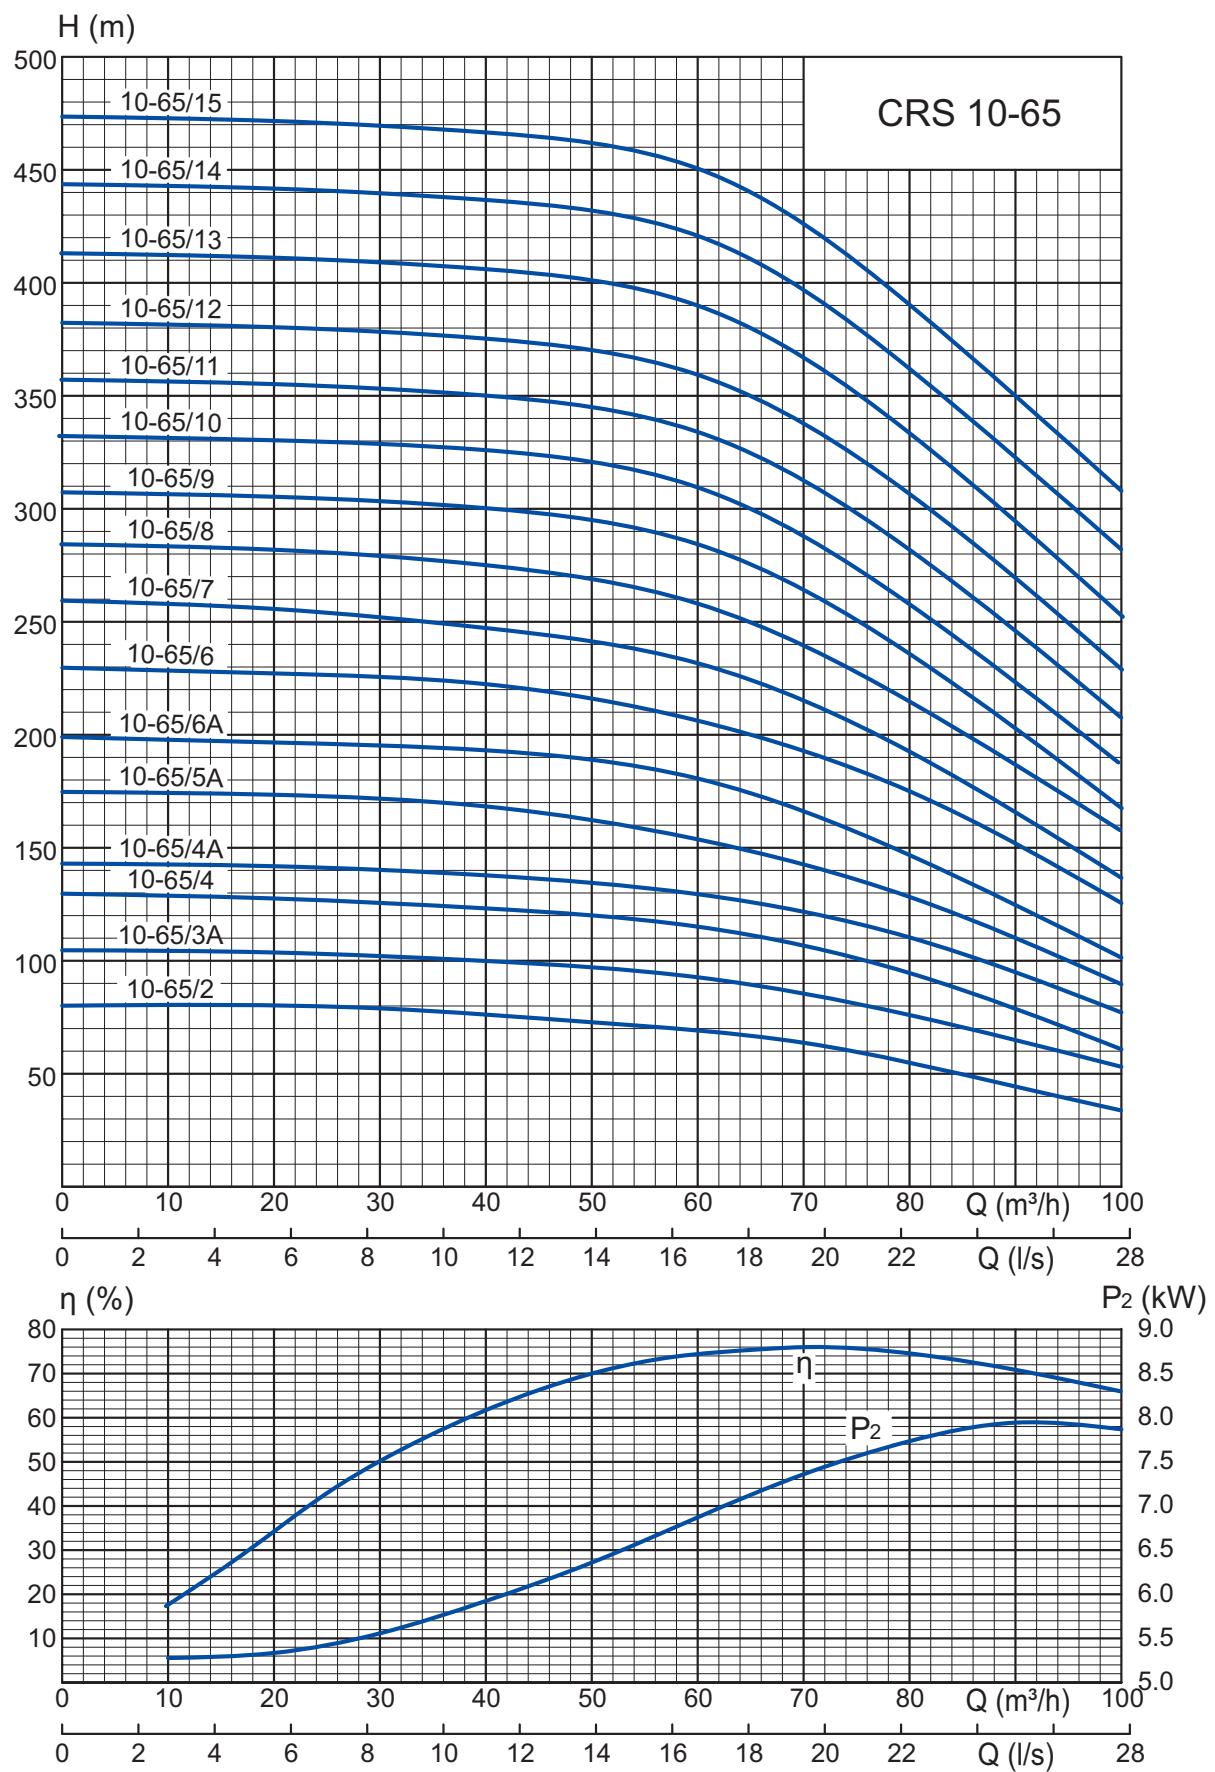

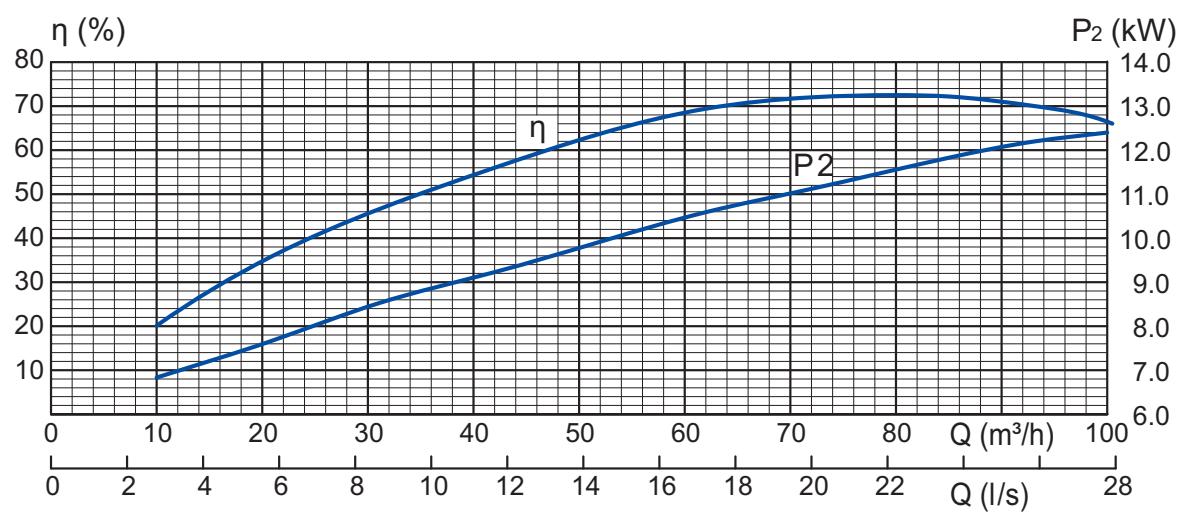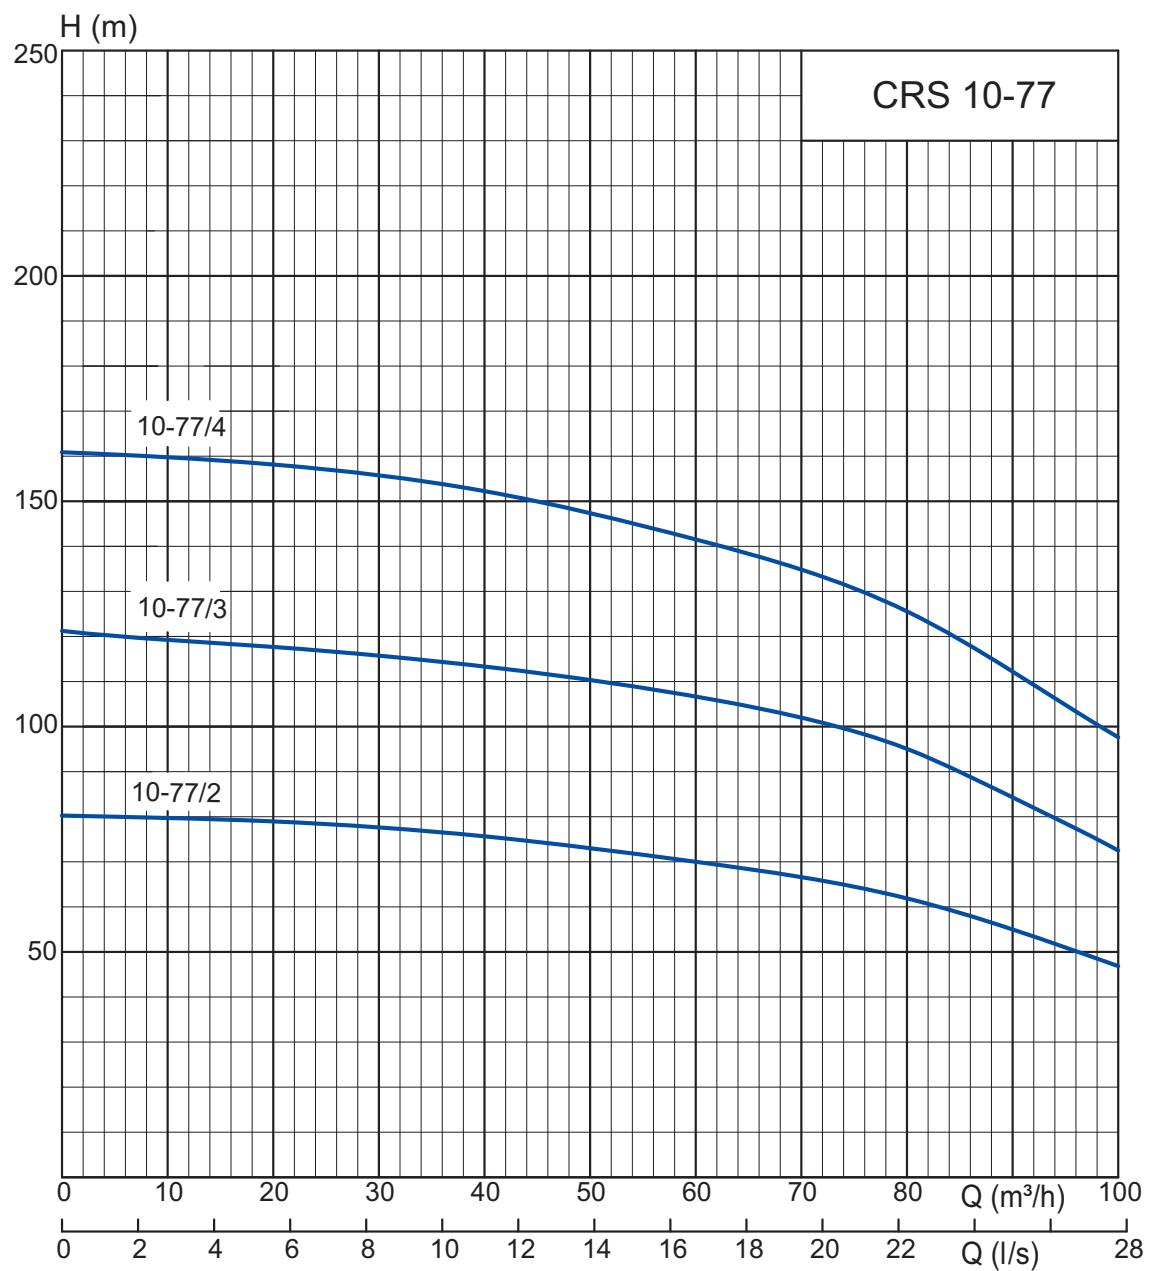


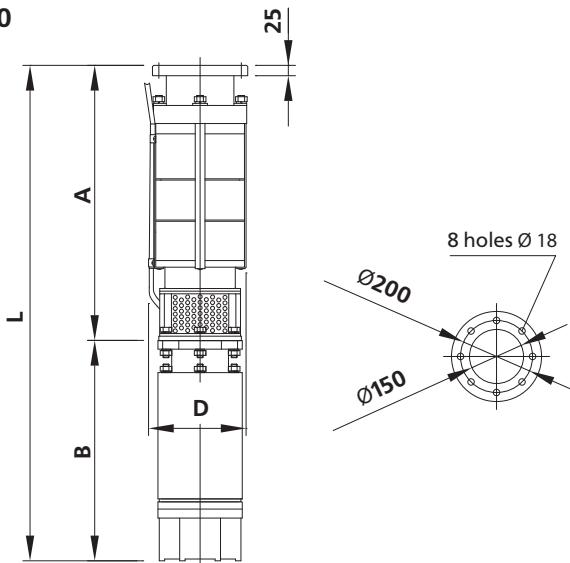
HMS CIRIS 10-100, HMS CIRIS 10-120



Pump	Electric motor		Dimensions, mm				Weight, kg
	Type	Power, kW	D	L	A	B	
CRS 10-100/2-18.5	DAP 8-18.5	18.5	235	1490	721	769	127
CRS 10-100/3-22	DAP 8-22	22	235	1765	889	876	180
CRS 10-100/4-26	DAP 8-26	26	235	1970	1059	911	182
CRS 10-100/4-30	DAP 8-30	30	235	1930	984	946	238
CRS 10-100/5-37	DAP 10-37	37	235	2125	1223	902	264
CRS 10-100/6-45	DAP 10-45	45	235	2340	1373	967	292
CRS 10-100/7-55	DAP 10-55	55	235	2560	1543	1017	307
CRS 10-100/8-65	DAP 10-65	65	235	2785	1703	1082	348
CRS 10-120/2-22	DAP 8-22	22	235	1430	554	876	162
CRS 10-120/3-30	DAP 10-30	30	235	1515	638	877	215
	DAP 8-30		235	1585	639	946	192
CRS 10-120/4-37	DAP 10-37	37	235	1650	748	902	232
	DAP 8-37		235	1770	749	1021	221
CRS 10-120/5-45	DAP 10-45	45	235	1815	848	967	260
	DAP 8-45		235	1985	849	1136	255
CRS 10-120/6-55	DAP 10-55	55	235	1960	943	1017	279
CRS 10-120/7-75	DAP 10-75	75	235	2205	1048	1157	328
CRS 10-120/8-75	DAP 10-75	75	235	2295	1138	1157	338
CRS 10-120/9-90	DAP 10-90	90	235	2505	1228	1277	384
CRS 10-120/10-110	DAP 10-110	110	235	2635	1318	1317	406
CRS 10-120/11-110	DAP 10-110	110	235	2725	1408	1317	415
CRS 10-120/12-130	DAP 10-130	130	235	3035	1498	1537	493
CRS 10-120/13-130	DAP 10-130	130	235	3125	1588	1537	502


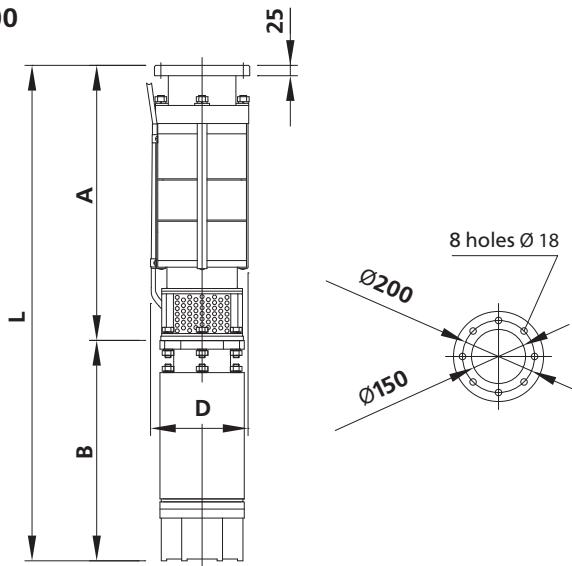
HMS CIRIS 10-160, HMS CIRIS 10-200


Pump	Electric motor		Dimensions, mm				Weight, kg
	Type	Power, kW	D	L	A	B	
CRS 10-160/1-18.5	DAP 8-18.5	18.5	235	1330	534	796	135
CRS 10-160/2-37	DAP 10-37	37	235	1590	688	902	229
	DAP 8-37		235	1710	689	1021	218
CRS 10-160/3-45	DAP 10-45	45	235	1820	853	967	262
	DAP 8-45		235	1990	854	1136	257
CRS 10-160/4-65	DAP 10-65	65	235	2100	1018	1082	310
CRS 10-160/5-75	DAP 10-75	75	235	2350	1193	1157	349
CRS 10-160/6-90	DAP 10-90	90	235	2640	1363	1277	401
CRS 10-160/7-110	DAP 10-110	110	235	2850	1533	1317	429
CRS 10-160/8-130	DAP 10-130	130	235	3240	1703	1537	512
CRS 10-200/2-45	DAP 10-45	45	235	1655	688	967	246
	DAP 8-45		235	1825	689	1136	242
CRS 10-200/3-65	DAP 10-65	65	235	1935	853	1082	295
CRS 10-200/4-75	DAP 10-75	75	235	2175	1018	1157	333
CRS 10-200/5-90	DAP 10-90	90	235	2370	1193	1277	386
CRS 10-200/6-110	DAP 10-110	110	235	2680	1363	1317	413

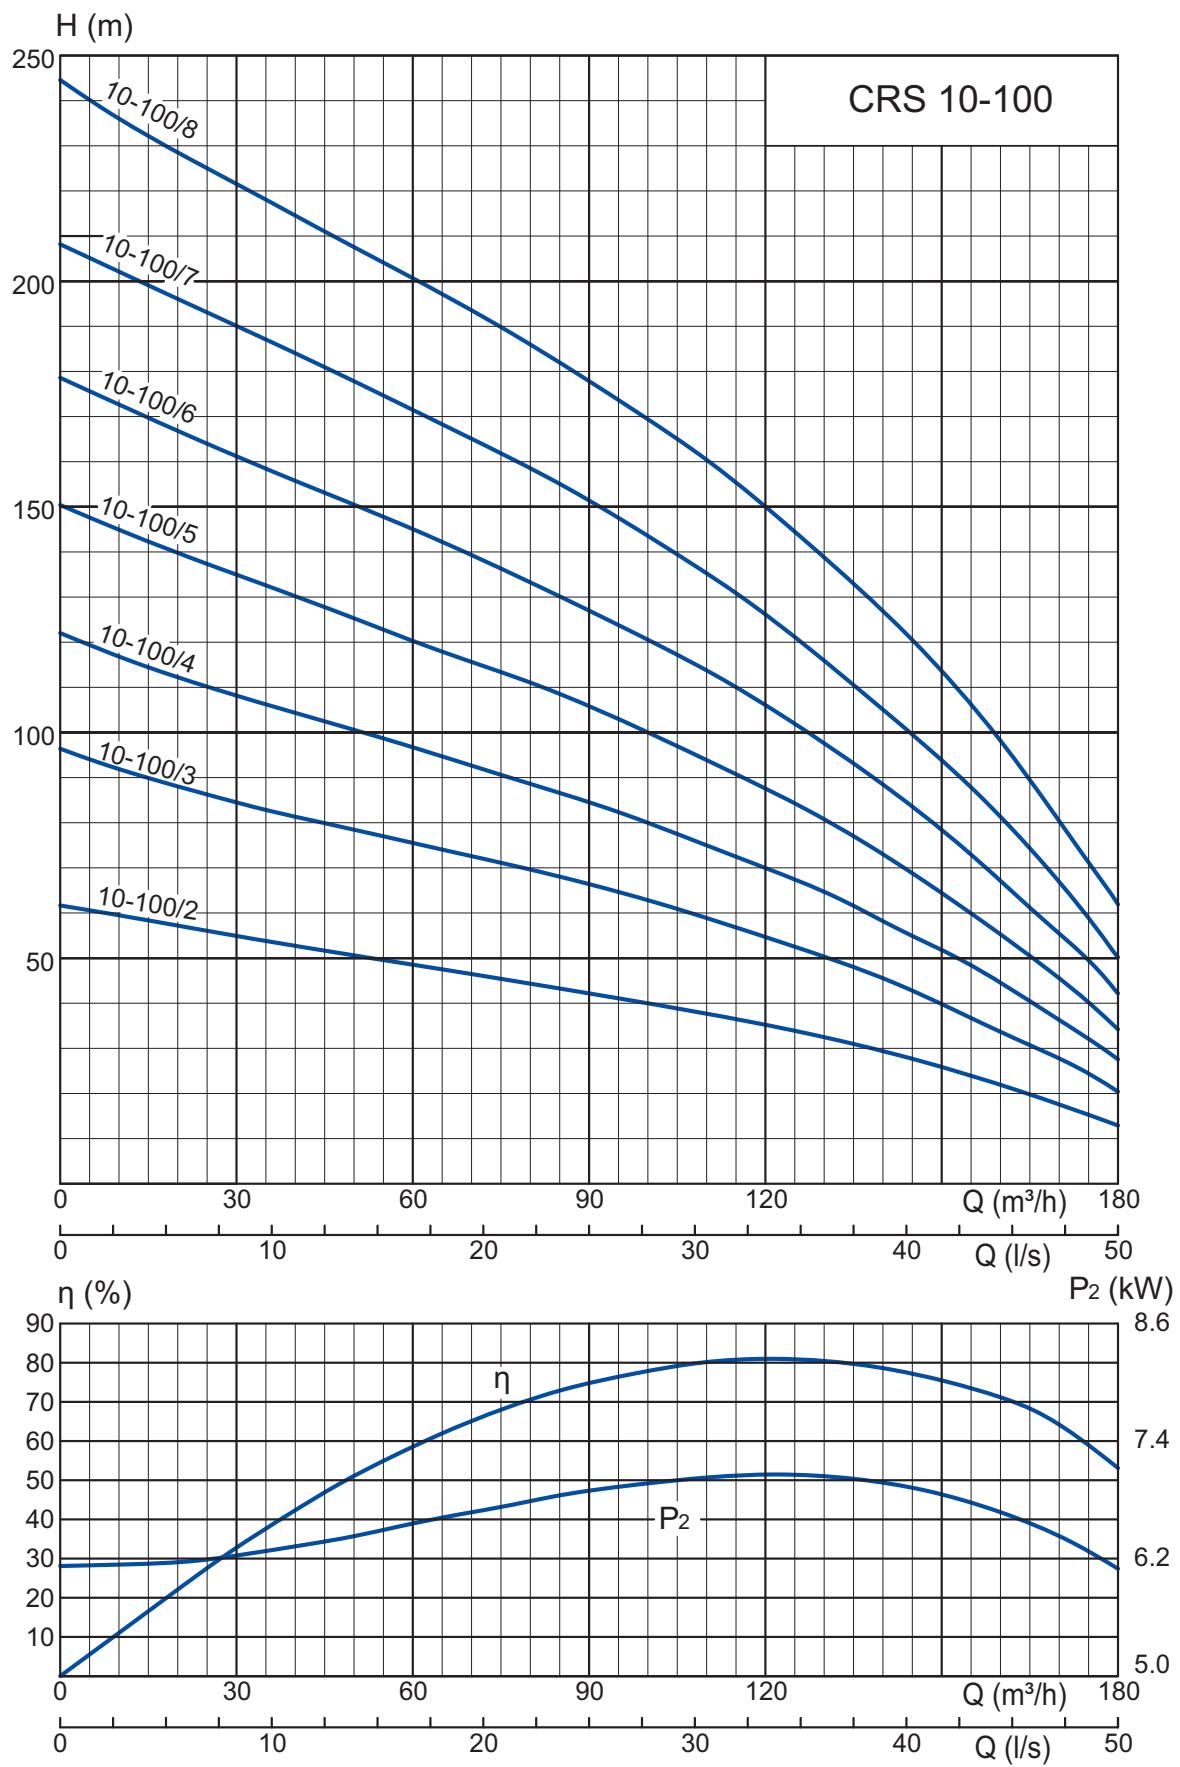

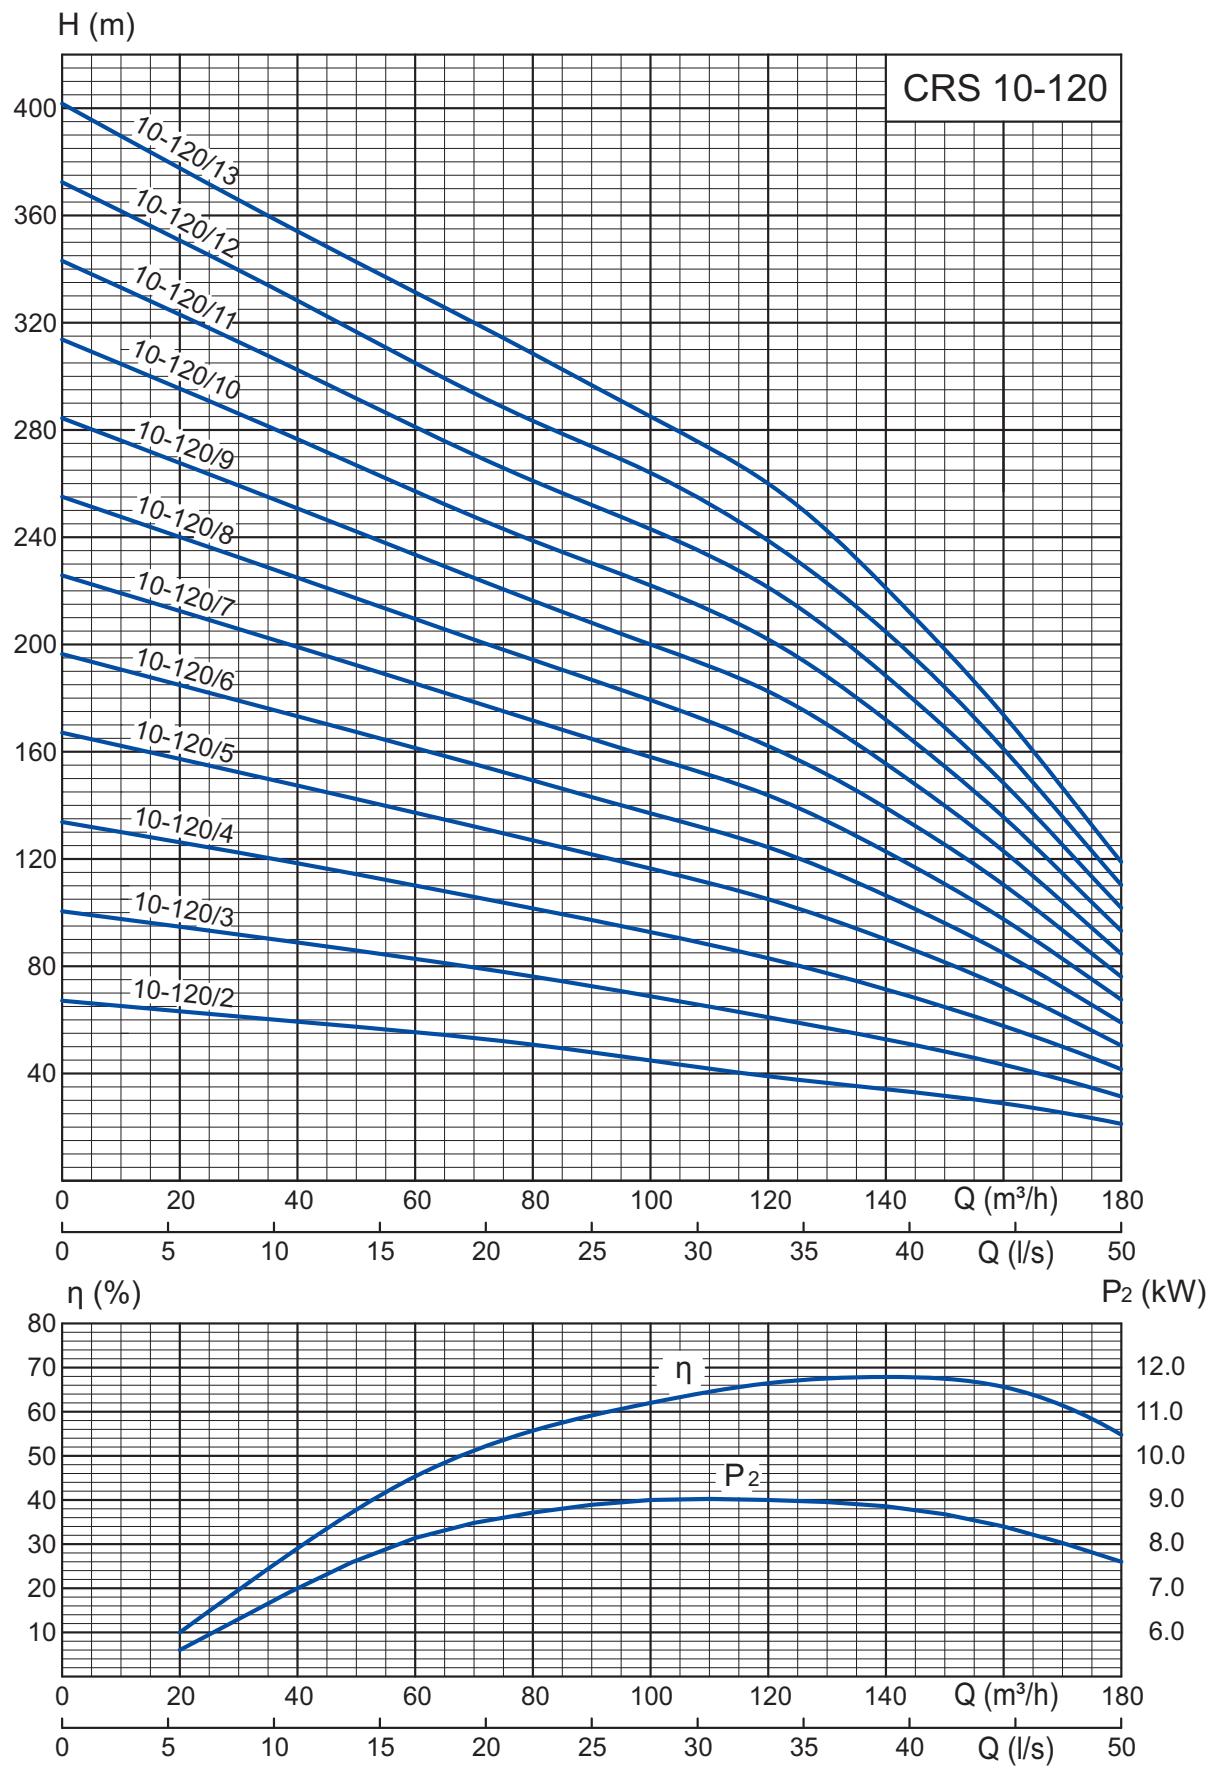


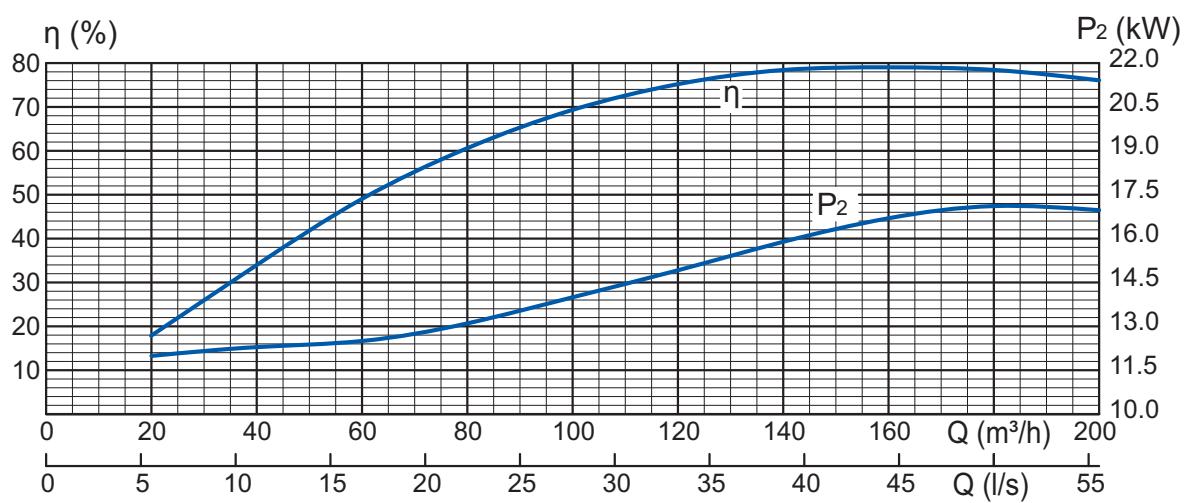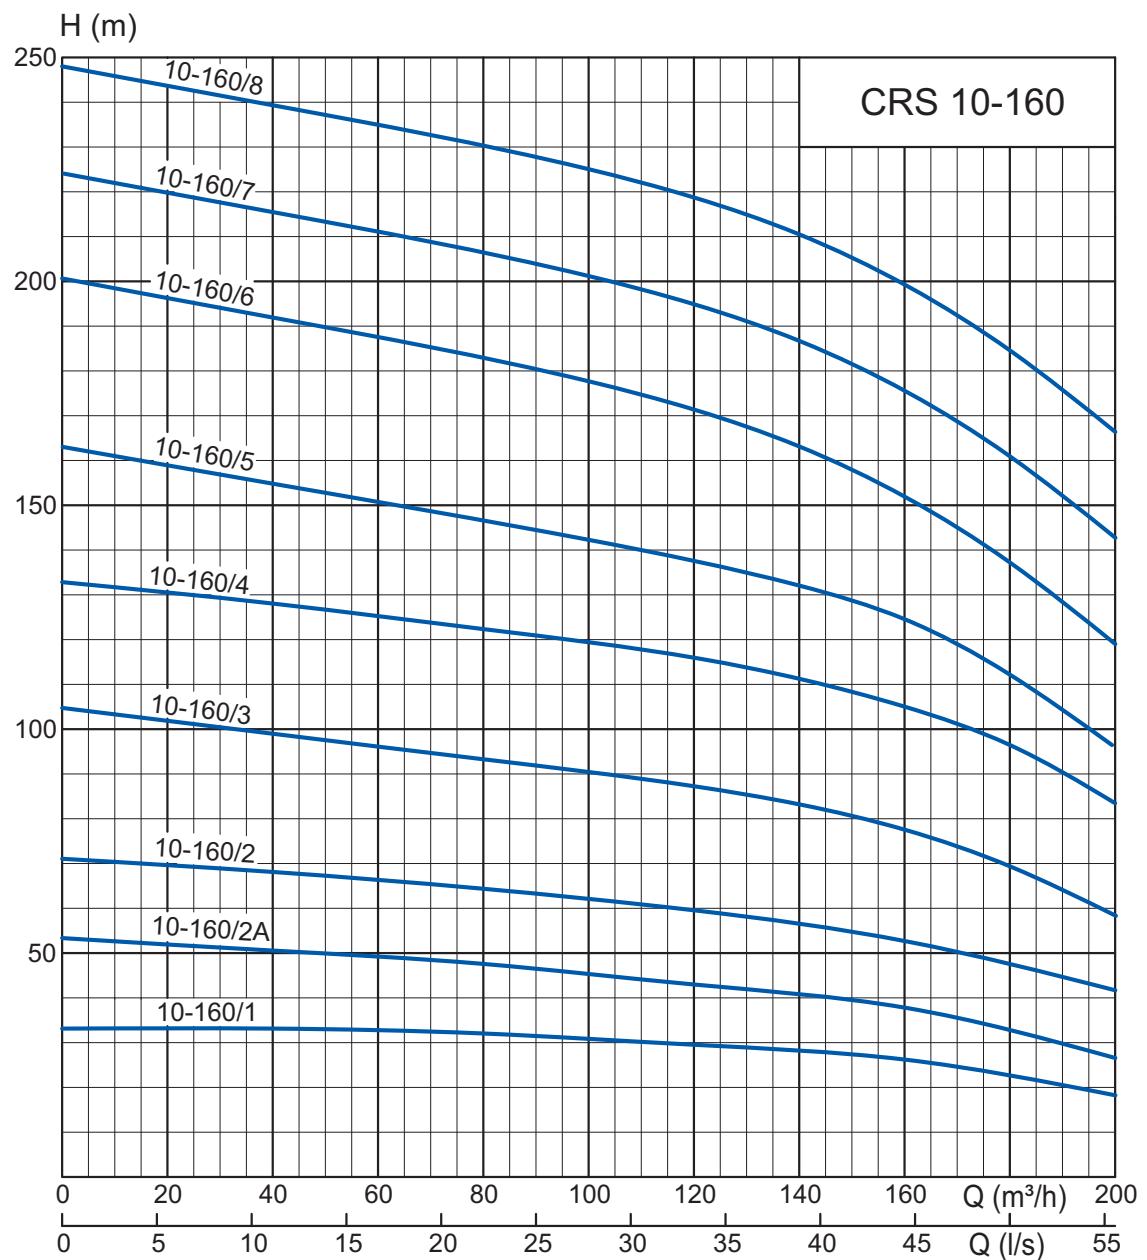


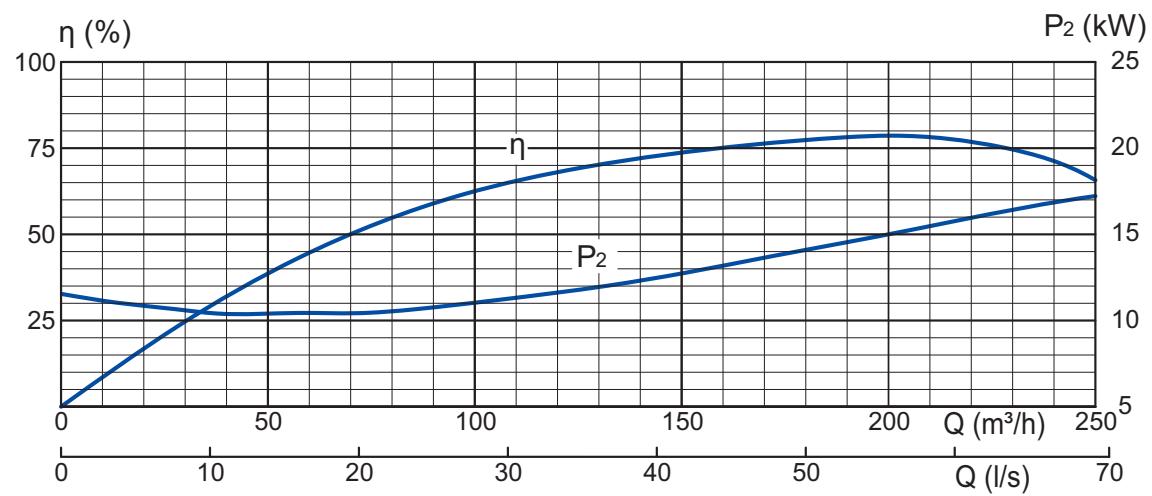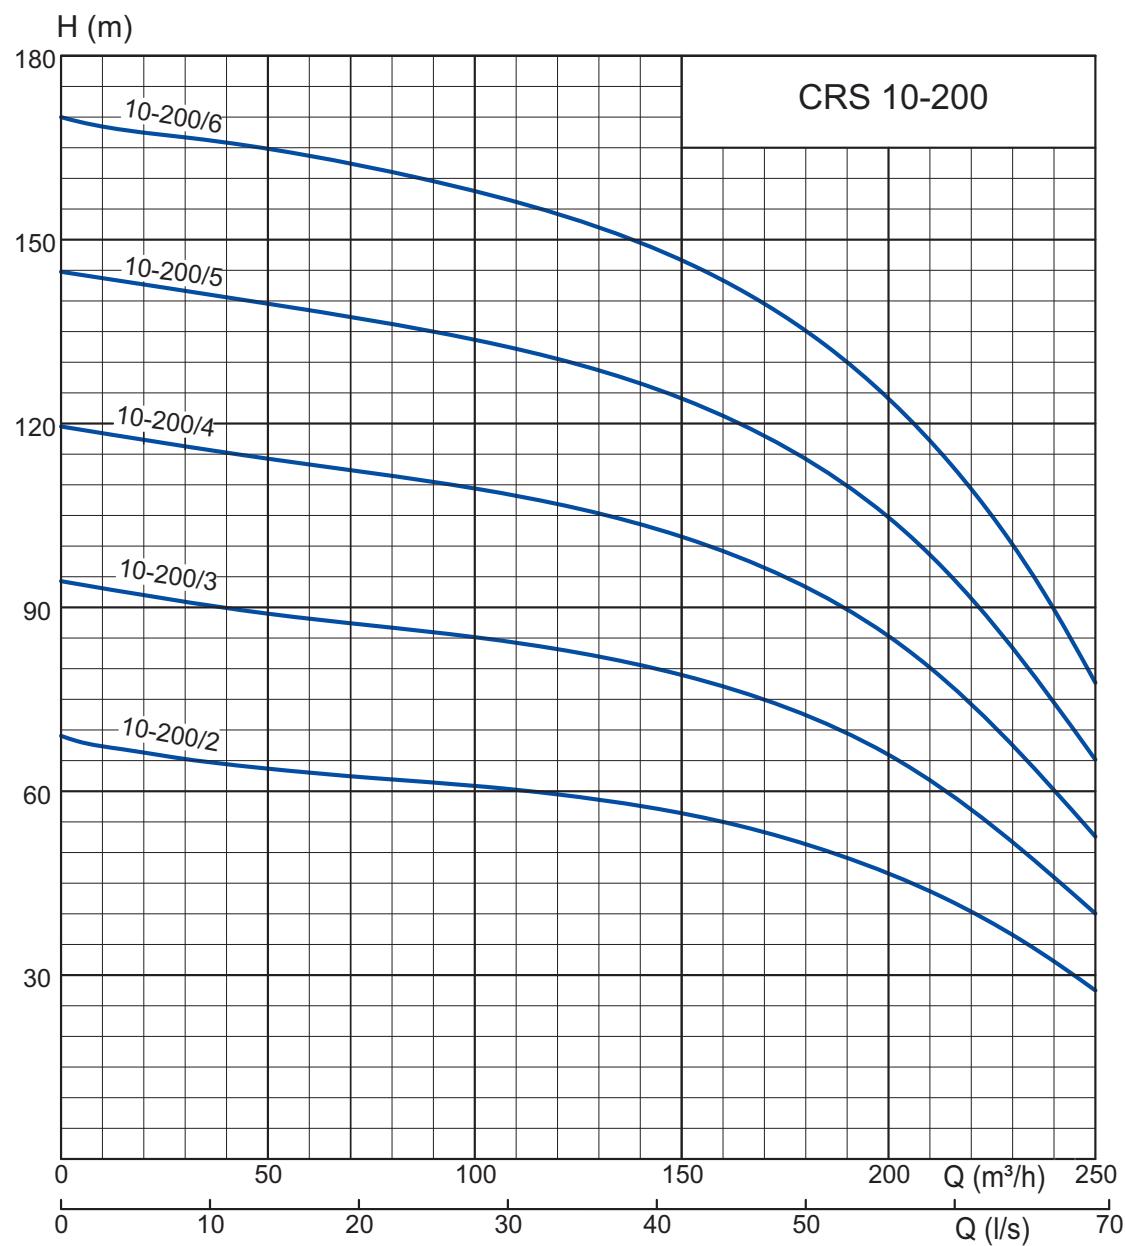


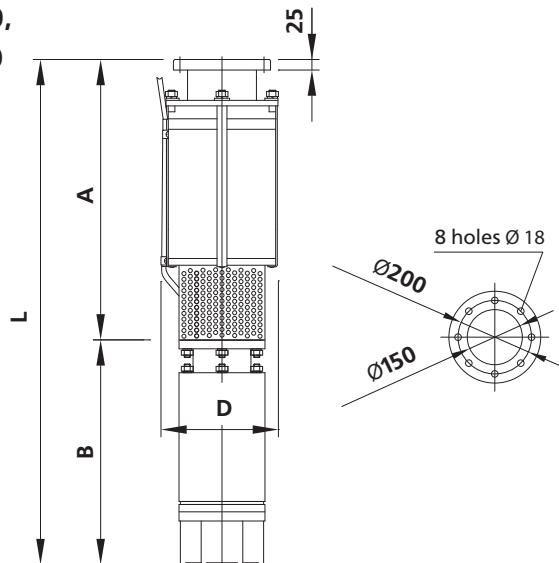
**HMS CIRIS 12-160, HMS CIRIS 12-200,
HMS CIRIS 12-210, HMS CIRIS 12-250**


Pump	Electric motor		Dimensions, mm				Weight, kg
	Type	Power, kW	D	L	A	B	
CRS 12-160/1-30	DAP 10-30	30	281	1325	448	877	209
CRS 12-160/2-45	DAP 10-45	45	281	1500	533	967	250
CRS 12-160/3-65	DAP 10-65	65	281	1700	618	1082	299
CRS 12-160/4-90	DAP 10-90	90	281	1980	703	1277	365
CRS 12-160/5-110	DAP 10-110	110	281	2105	788	1317	389
CRS 12-160/6-130	DAP 10-130	130	281	2410	873	1537	468
CRS 12-200/1-30	DAP 10-30	30	281	1510	633	877	225
CRS 12-200/2-65	DAP 10-65	65	281	1940	858	1082	315
CRS 12-200/3-90	DAP 10-90	90	281	2390	1113	1277	460
CRS 12-200/4-110	DAP 10-110	110	281	2900	1583	1317	510
CRS 12-210/1-30	DAP 10-30	30	281	1500	623	877	224
CRS 12-210/2-45	DAP 10-45	45	281	1850	883	967	280
CRS 12-250/1-37	DAP 10-37	37	281	1570	668	902	235
CRS 12-250/2-75	DAP 10-75	75	281	2024	867	1157	334
CRS 12-250/3-110	DAP 10-110	110	281	2650	1333	1317	472
CRS 12-250/4-130	DAP 10-130	130	281	2900	1363	1537	585

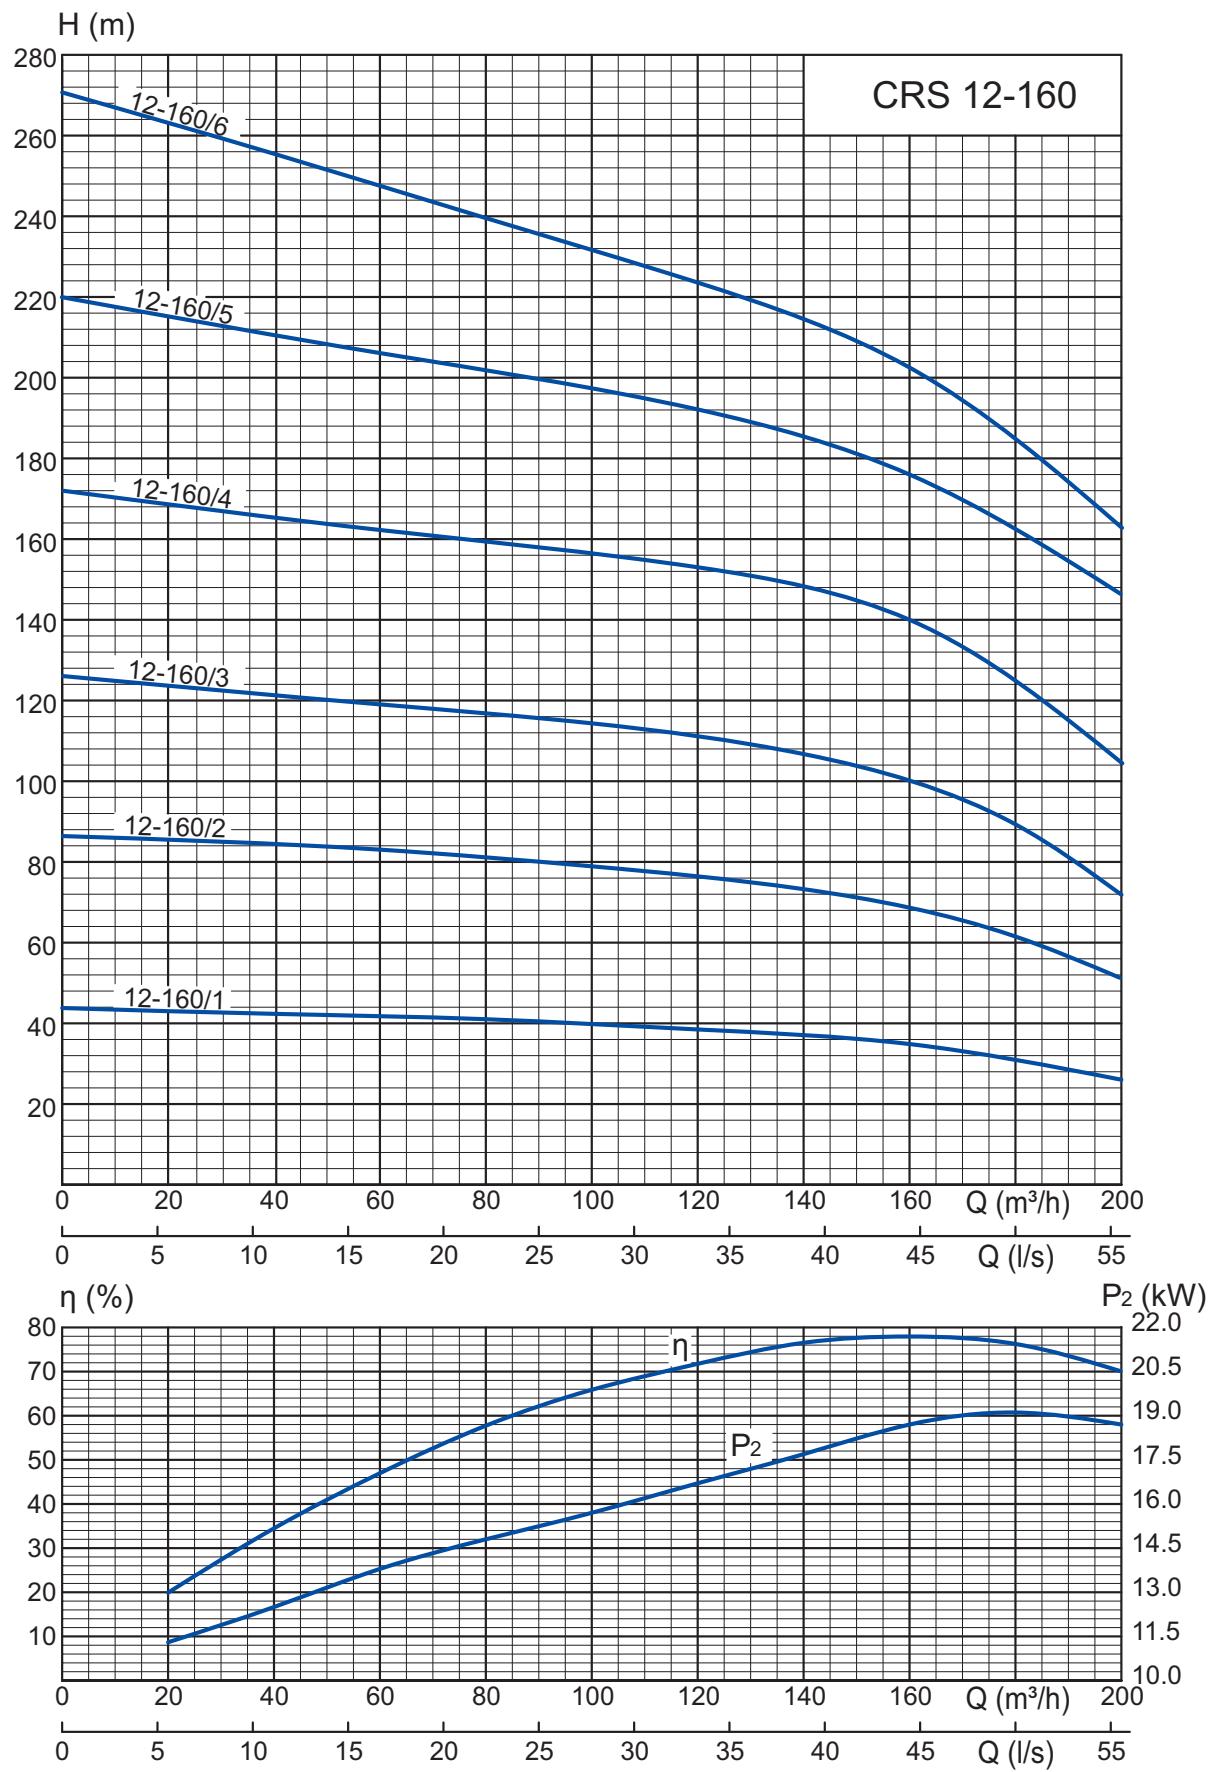

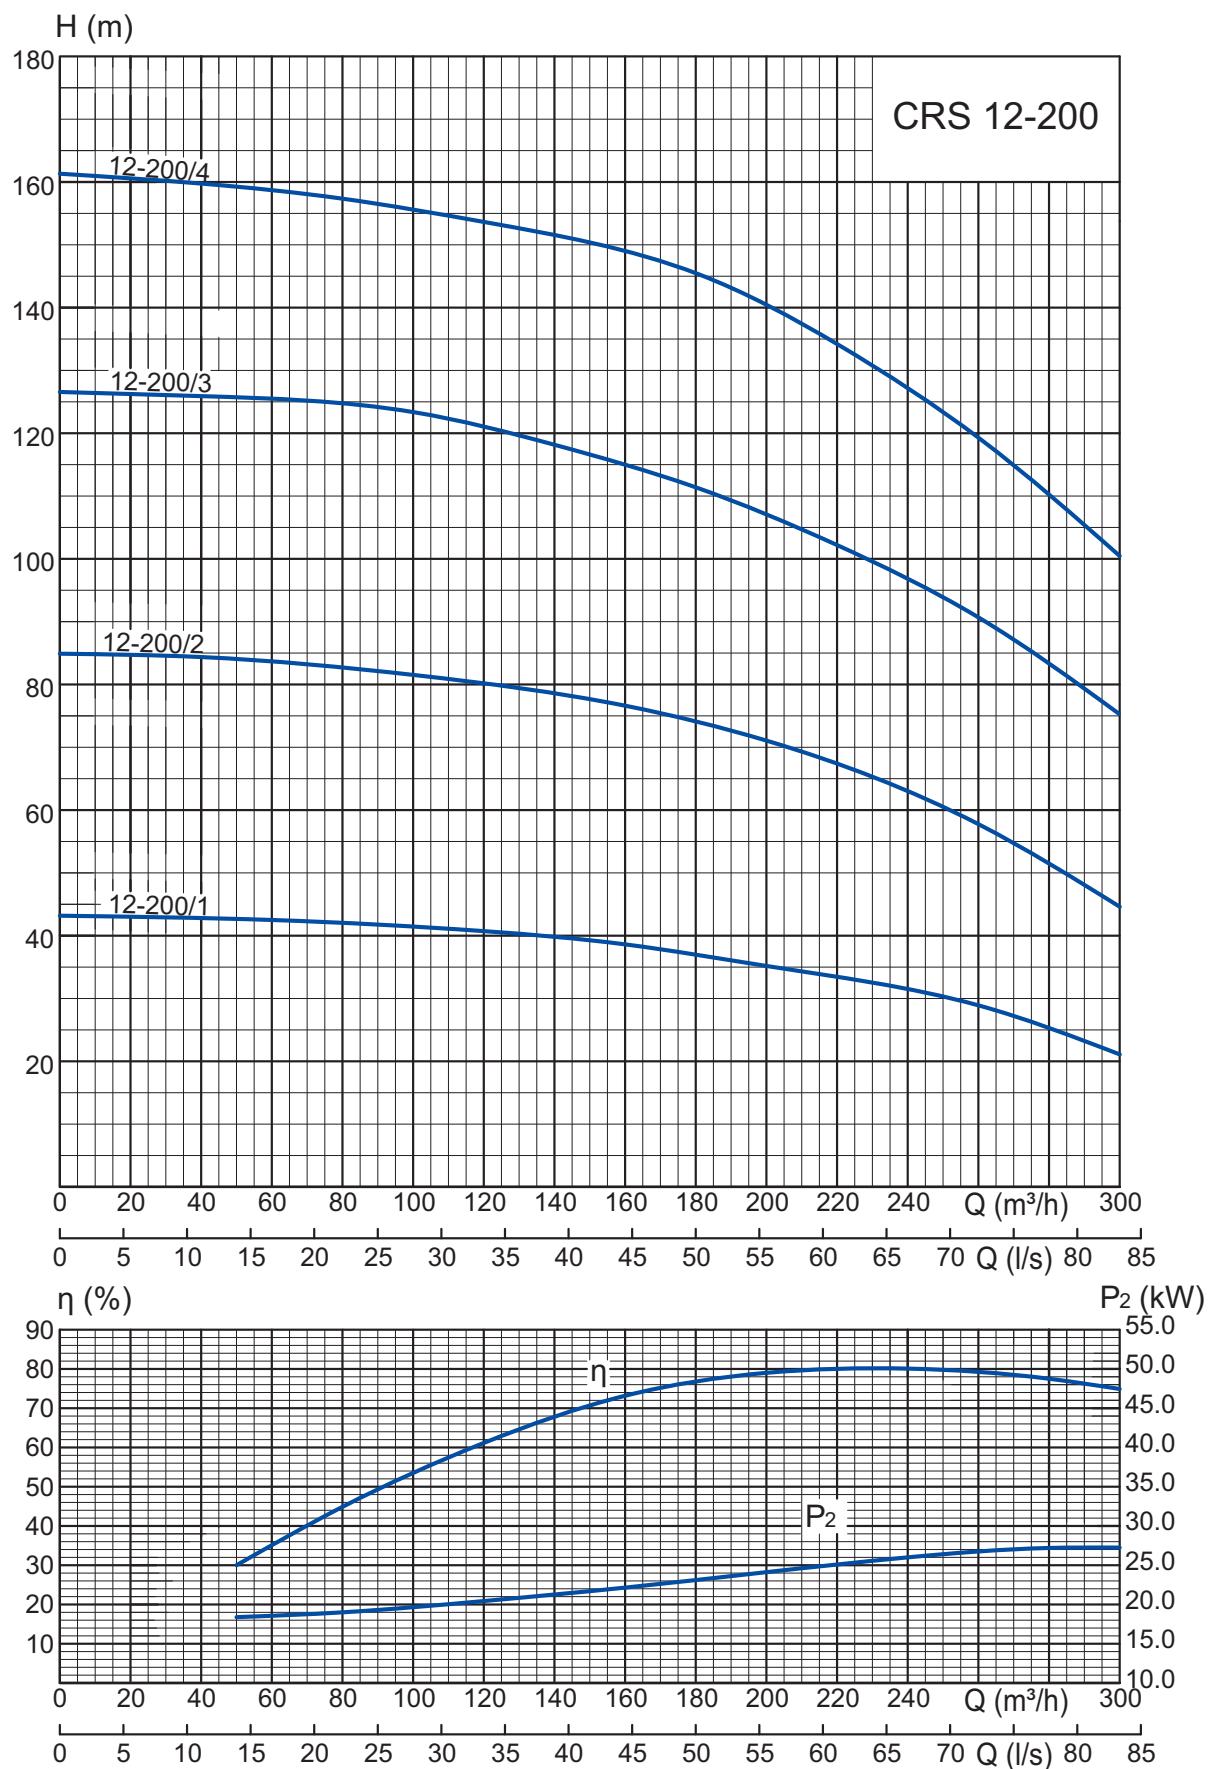

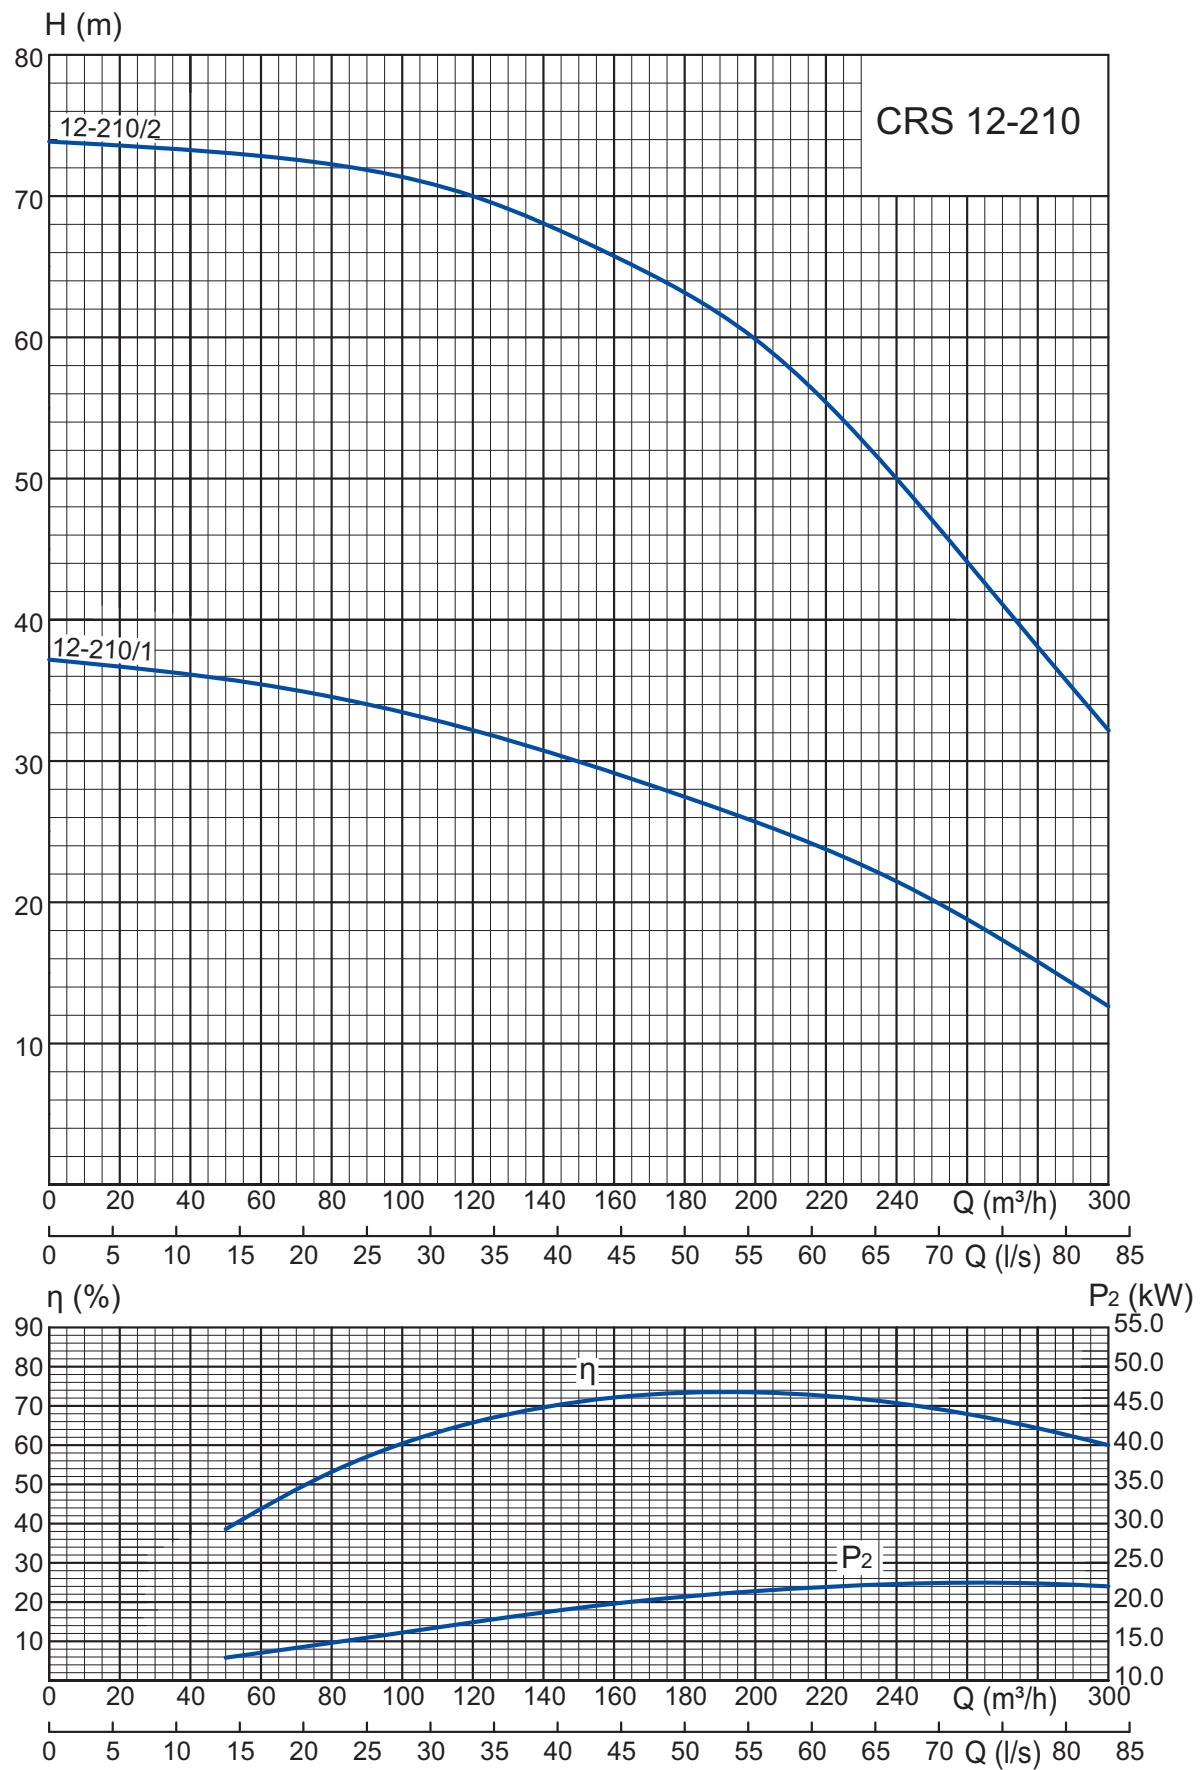

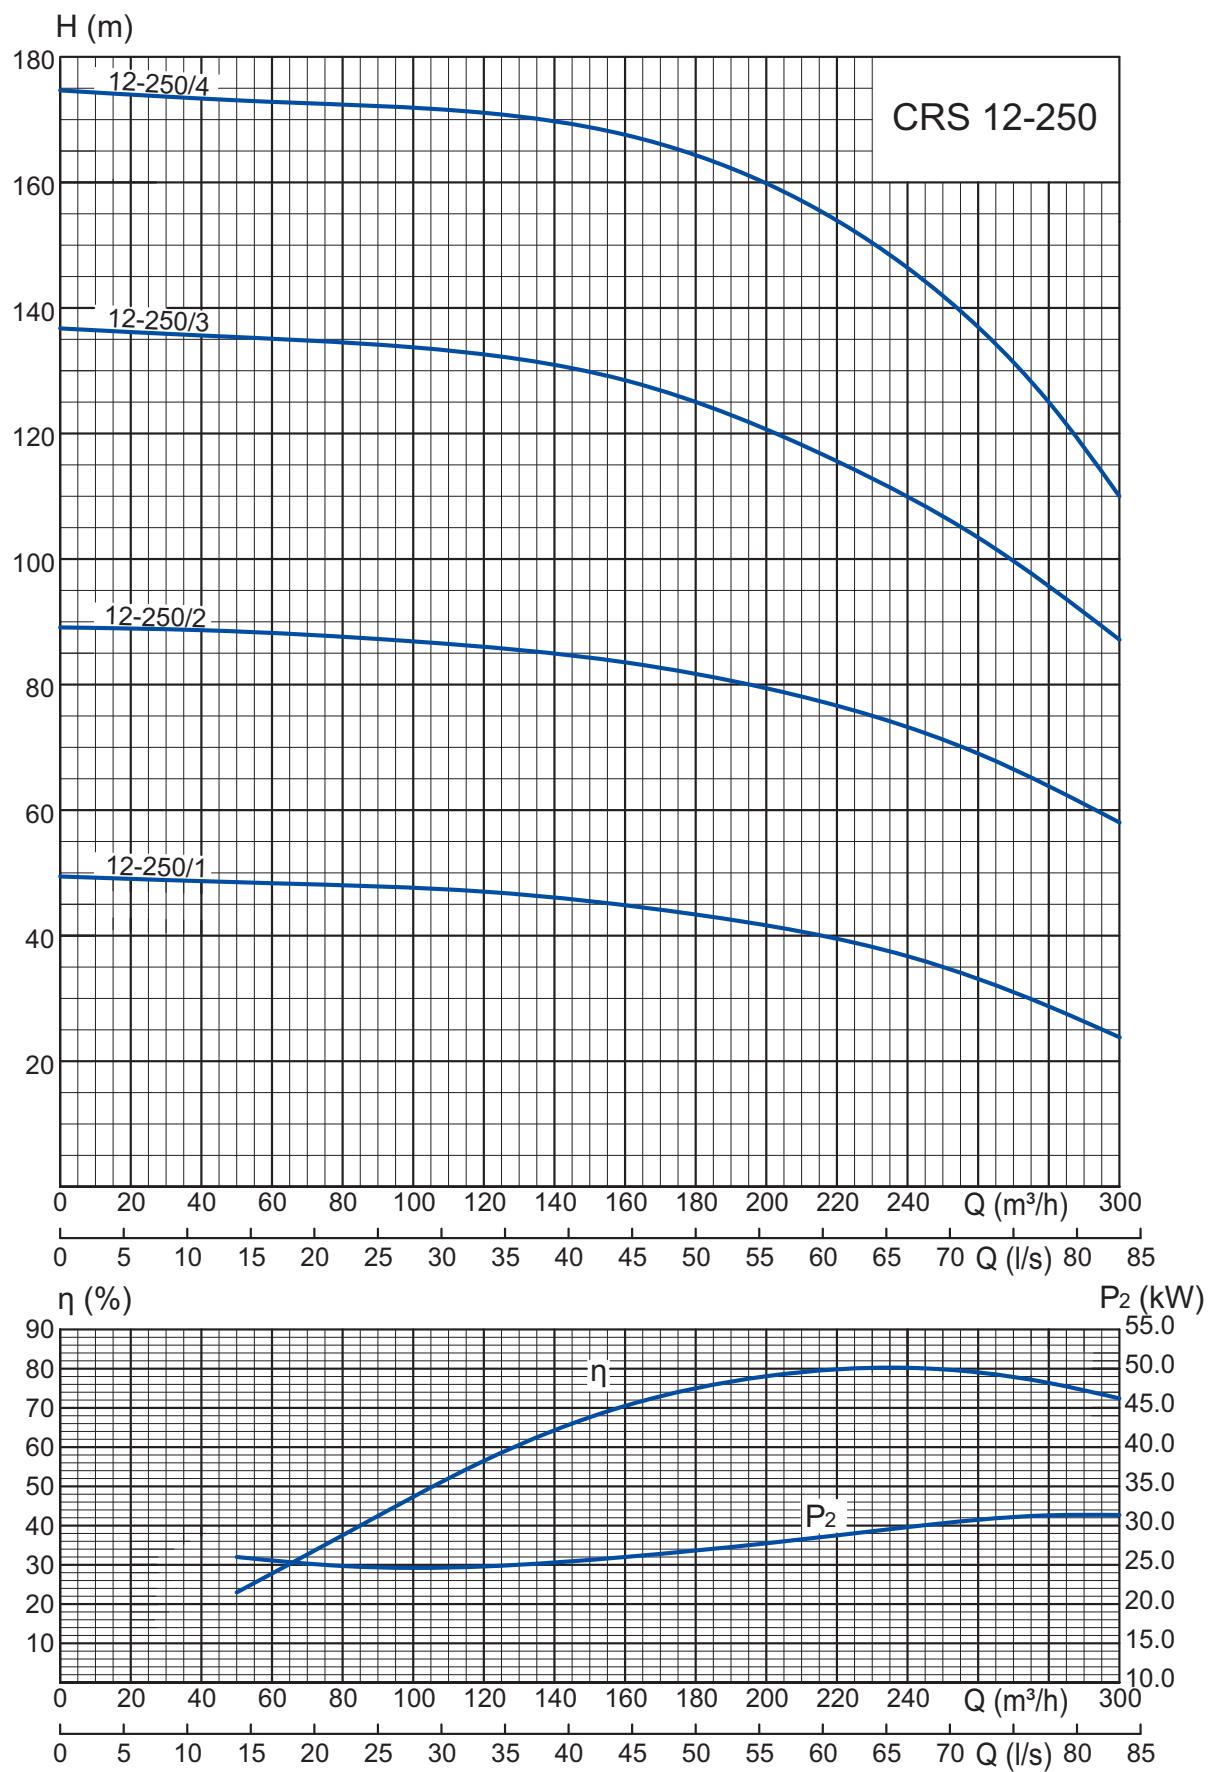


ACCESSORIES PIPE ADAPTERS

ADAPTER THREAD - FLANGE


AMT6.411.021

DN 80. Models: CRS 8-16,
CRS 8-25, CRS 8-40

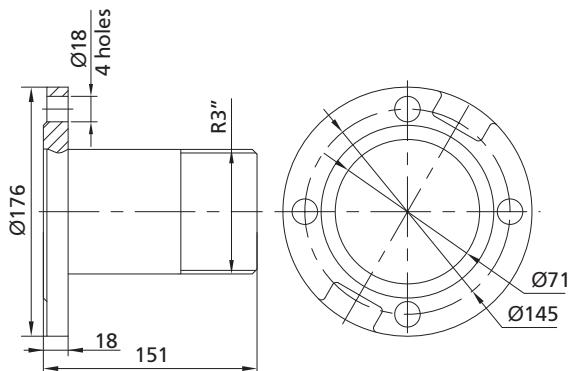


AMT6.411.022-01

DN 100. Models: CRS 8-65

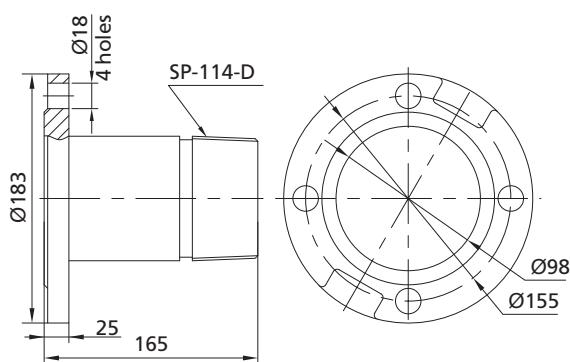


AMT6.411.022

DN 100. Models: CRS 10-65

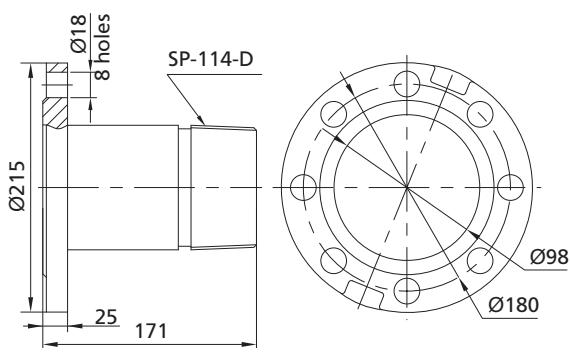


ACCESSORIES


THREAD ADAPTERS

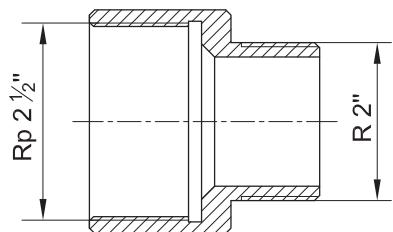


AMT8.229.023

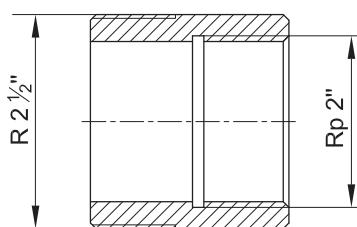


AMT8.229.017

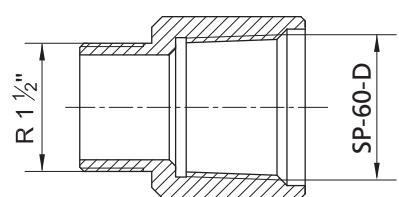


AMT8.229.024

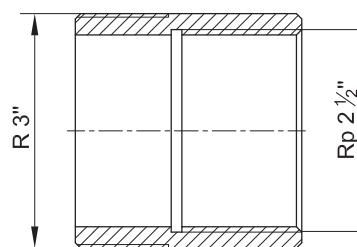


AMT8.229.018

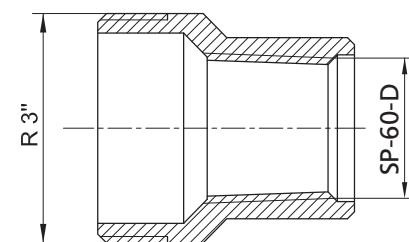


AMT8.229.029

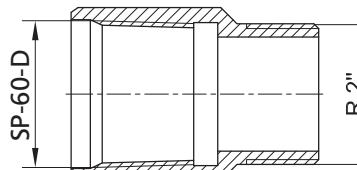


AMT8.229.019

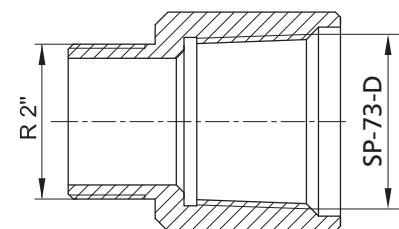


AMT8.229.030

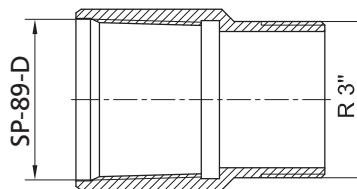

AMT8.229.020

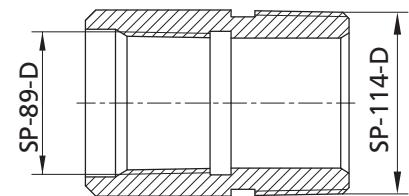

AMT8.229.032

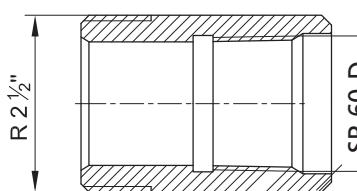

AMT8.229.025


REWINDABLE SUBMERSIBLE MOTORS

DAP SERIES

Parameters	DAP 6	DAP 8	DAP 10
Outer diameter	144	189	189
Ingress protection code		IP68	
Starts per hour	≤ 20		≤ 10
Water temperature		+30 °C (86 °F)	
Voltage		50 Hz, 3 x 400 V	
Voltage tolerance		- 15 ... + 10 %	
Synchronous rotation speed		3000 rpm	
Motor winding type		PE2, up to + 100 °C	



DAP 6

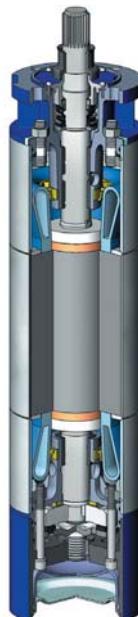


DAP 8



DAP 10

POWER SUPPLY CONNECTION

DOL (Direct On-Line)



DAP MOTOR DESIGNATION

DAP series motor

Motor size (inches)

Rated power, kW




TABLE № 6. OPERATING PARAMETERS
DAP submersible motors

Model	Power P2		F	I _n	I _{st} /I _{nom}	Eff.	cosφ	n _n	T _{nom}	T _{st} /T _{nom}	Motor length	Weight	Leads
	kW	HP	kN	A	A	%		rpm	N·m	N·m	L, mm	kg	mm ²
DAP 6-3	3	4	10	7	5.4	77	0.82	2900	10	1.5	597	38	4
DAP 6-4	4	5.5	10	9	5.4	78	0.82	2900	13	1.5	621	40	4
DAP 6-5.5	5.5	7.5	10	12	5.7	79	0.82	2900	18	1.6	641	42	4
DAP 6-7.5	7.5	10	10	17	5.6	80	0.82	2900	25	1.7	706	49	4
DAP 6-9	9	12	10	20	5.6	81	0.82	2900	30	1.6	731	51	4
DAP 6-11	11	15	10	24	6.3	81	0.82	2900	36	1.8	766	55	4
DAP 6-13	13	17.5	10	28	6	81	0.82	2900	43	1.7	821	60	4
DAP 6-15	15	20	10	32	5.9	82	0.82	2900	49	1.8	861	64	4
DAP 6-18.5	18.5	25	10	40	5.8	82	0.82	2900	61	1.8	906	69	4
DAP 8-11	11	15	15	22	4.7	83	0.86	2870	37	1.1	726	78	10
DAP 8-13	13	17.5	15	27	4.7	83	0.84	2870	43	1.1	756	81	10
DAP 8-15	15	20	15	31	4.7	83	0.84	2870	50	1.2	781	86	10
DAP 8-18.5	18.5	25	15	38	4.7	83	0.84	2870	62	1.2	769	89	10
DAP 8-22	22	30	15	44	5.1	85	0.85	2870	73	1.2	876	106	10
DAP 8-26	26	35	20	52	5.1	85	0.85	2870	87	1.2	911	114	10
DAP 8-30	30	40	20	60	5.1	85	0.85	2870	100	1.1	946	121	10
DAP 8-37	37	50	20	73	5.4	85	0.86	2870	123	1.4	1021	141	10
DAP 8-45	45	60	20	89	5.5	86	0.85	2870	150	1.5	1136	164	10
DAP 10-30	30	40	20	60	4.9	85	0.85	2900	99	1.1	877	144	25
DAP 10-37	37	50	20	72	5.4	86	0.86	2900	122	1.4	902	152	25
DAP 10-45	45	60	30	87	5.5	87	0.86	2900	148	1.5	967	169	25
DAP 10-55	55	74	30	106	5.4	87	0.86	2900	181	1.5	1017	182	25
DAP 10-65	65	87	30	125	5.3	87	0.86	2900	214	1.4	1082	202	25
DAP 10-75	75	100	30	145	4.9	88	0.85	2900	247	1.2	1157	225	25
DAP 10-90	90	121	45	174	5.2	88	0.85	2900	296	1.2	1277	262	35
DAP 10-110	110	161	45	212	5.2	88	0.85	2920	360	1.2	1317	274	50
DAP 10-130	130	174	45	251	5.8	88	0.85	2920	425	1.2	1537	342	50

HMS Control L2 series

Panel for a Single Pump

APPLICATION

HMS Control L2 series panel is intended to control and protect a single borehole submersible pump, drainage or surface pump, as well as any three-phase asynchronous electric motor with a short-circuit rotor.

CONTROL

- Manual control of pump electric motor using buttons on the microcontroller panel
- Automatic start/stop of the pump motor by the signals from sensors
- Remote wired control by an external discrete signal



PANEL DESIGNATION

HMS Control L2 – XXX – IP54

Panel series

Maximum pump current, A:
025; 040; 080; 100; 160; 205

IP54 – ingress protection code

TECHNICAL DATA

Number of connected electric motors	1 motor
Maximum current of the connected electric motor	200A*
Power supply voltage / Current	380V (+10 ...-15%) / 50 ± 2 Hz, 3 phase, N, PE
Current and voltage control for each phase	yes
Maximum number of connected sensors	4 sensors
Adjustable output relays (N.O. / N.C. contacts)	1 relay
Microcontroller power supply voltage	220V
Electric motor start method	Direct-on-line
Panel operating temperature range	-40 ... +40 °C
Maximum relative humidity	80 %

* Panels with a connected electric motor current more than 200A are available by request

PANEL SWITCHING SIGNALS

Input signals and connected sensors	
Upper and lower level sensor types	Electric contact manometer Sensors power supply rated voltage: ~ 15V
«Dry run» sensor	Sensor power supply rated voltage: ~ 15V
External control	Sensor power supply rated voltage: ~ 15V

Sensors with dry contacts, electric contact manometer of any design, float switches, conductometric (electrode) and other discrete sensors can be used as the level sensors.

Output signals	
User-adjustable event (selected in the microcontroller setup menu)	N.O. / N.C. relay contacts with brake-make contact ~ 250V, 1A
Relay signals	<ul style="list-style-type: none"> ■ «Panel operation» (power is ON and no alarm signals) ■ «Accident» ■ «Motor ON» / Motor OFF» ■ «External control» ■ «Input dH» triggered ■ «Input dL» triggered ■ «Input dS» triggered

SERIAL MODELS

Panel	Electric motor		Set protection current, A		Ingress protection code	Dimensions mm	Weight, kg
	Power, kW	Operating current, A*	min.	max.			
HMS Control L2 - 25	0.3 - 11	1 - 25	1	25	IP54	310x420x150	8
HMS Control L2 - 40	9 - 17	20 - 40	20	40		310x420x150	8
HMS Control L2 - 80	22 - 37	55 - 80	55	80		505x300x190	11
HMS Control L2 - 100	30 - 45	75 - 100	75	100		500x400x220	16
HMS Control L2 - 160	45 - 75	115 - 160	115	160		650x500x200	25
HMS Control L2 - 200	75 - 90	155 - 205	155	200		650x500x200	27

* When selecting a model, an electric motor operating current shall be 5 – 10% less than a value set for a panel.

HMS Control L3 series

Panel for a Single Pump with Extended Functions

APPLICATION

HMS Control L3 series panel is intended to control and protect a single borehole submersible pump, drainage or surface pump with three-phase asynchronous electric motor with a short-circuit rotor. The panel provides direct-on-line or soft start of the electric motor.

CONTROL

- Manual control of pump electric motor using buttons on the microcontroller panel
- Automatic start/stop of the pump motor by the signals from sensors
- Remote wired control by an external discrete signal



PANEL DESIGNATION

Designation example:

HMS Control L3 - 120 - P - M - T - IP54

Panel series

Maximum current of connected electric motor, A

Motor starting method:

no index – direct-on-line

P – soft start

Available options:

M – surge protection

N – lowered/ heightened voltage protection

O – panel inner space heating

R – disconnector switch

S – remote control via RS-485 (Modbus RTU)


T/T1 – motor winding temperature sensor Pt100/PTC

T2 – pump bearings temperature sensors (2 sensors)

T4 – pump and motor bearings temperature sensors (4 sensors)

E – electrode level sensors (required alternating current power)

HMS Control L3 - XXX - X - X.X.X - IPXX

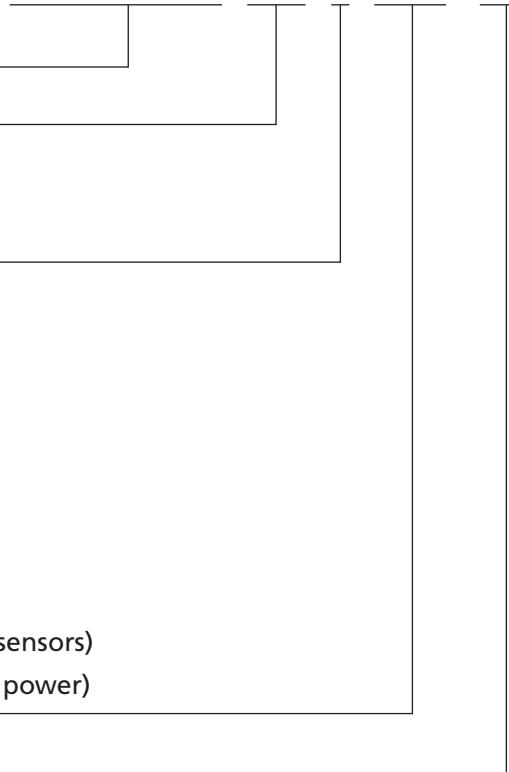

TECHNICAL DATA

Number of connected electric motors	1 motor	
Maximum current of the connected electric motor / Power	1 – 300A* / up to 132 kW	
Power supply voltage / Current	~380V (+10 ... -15%) /50 ±2 Hz, 3 phase, N, PE	
Current and voltage control for each phase	yes	
Maximum number of connected sensors	5 sensors	
Adjustable output relays (N.O. / N.C. contacts)	1 relay	
Microcontroller power supply voltage	220V	
Electric motor start method	Direct-on-line	Soft start
Panel operating temperature range	+1 ... +40 °C	-40 ... +40 °C
Maximum relative humidity	80% at 25 °C	100% at 25 °C

*Panels for pumps with electric motors over 300A are available by request

PANEL SWITCHING SIGNALS

Input signals and connected sensors	Output signals
<ul style="list-style-type: none"> ■ «Dry run» sensor ■ Pressure relay or electric contact manometer ■ Upper level sensor ■ Lower level sensor ■ «External control» input ■ «External accident» input ■ PT100 / PTC sensor 	<ul style="list-style-type: none"> ■ «Accident» relay ■ User-configurable relay for one of the following functions: <ul style="list-style-type: none"> ■ «Panel operation» (power is ON and no alarm signals) ■ «Accident» ■ «Motor ON» ■ «External accident» ■ «External control» ■ «Upper level sensor triggered» ■ «Lower level sensor triggered» ■ «Dry run sensor triggered»
Sensors power supply rated voltage: 15V DC	Relay switching capacity: ~ 250V, 1A

SERIAL MODELS

Direct start panels	Soft start panels	Rated current, A**	Rated power, kW
HMS Control L3-25-IP54	HMS Control L3-25-P-IP54	1 - 25	1.1 - 9
HMS Control L3-40-IP54	HMS Control L3-40-P-IP54	20 - 40	11 - 17
HMS Control L3-60-IP54	HMS Control L3-60-P-IP54	35 - 60	18.5 - 22
HMS Control L3-80-IP54	HMS Control L3-80-P-IP54	55 - 80	27 - 37
HMS Control L3-100-IP54	HMS Control L3-100-P-IP54	75 - 100	45
HMS Control L3-120-IP54	HMS Control L3-120-P-IP54	95 - 120	50, 55
HMS Control L3-160-IP54	HMS Control L3-160-P-IP54	115 - 160	65, 75
HMS Control L3-200-IP54	HMS Control L3-200-P-IP54	155 - 200	90
HMS Control L3-250-IP54	HMS Control L3-250-P-IP54	195 - 250	110
HMS Control L3-300-IP54	HMS Control L3-300-P-IP54	245 - 300	132

** When selecting a model, an electric motor operating current shall be 5 – 10% less than a value set for a panel.

HMS Control L4 series

Panel for a Single Pump with Wireless Connection

APPLICATION

HMS Control L4 series panel is intended to control (including wireless) and protect a single borehole submersible pump, drainage or surface pump with three-phase asynchronous electric motor with a short-circuit rotor. The panel provides direct-on-line or soft start of the electric motor.

CONTROL

- Manual control of pump electric motor using buttons on the microcontroller panel
- Automatic start/stop of the pump motor by the signals from sensors
- Remote wired or wireless control by a radio channel, GSM / GPRS modem, or via SMS messages



PANEL DESIGNATION

Designation example:

HMS Control L4 – 130 – P – M – GPRS – IP54

HMS Control L4 – XXX – P – X.X.X – IPXX

Panel series

Maximum current of connected electric motor, A

Motor starting method:

no index – direct-on-line
P – soft start

Available options:

M – surge protection

N – lowered / heightened voltage protection

O – panel inner space heating

R – disconnector switch

T2 – pump bearings temperature sensors (2 sensors)

T4 – pump and motor bearings temperature sensors (4 sensors)

E – electrode level sensors (required alternating current power supply)

GPRS – data transmission and control via GPRS of cellular network

RDM – data transmission and control by radio channel

SMS – control and monitoring via SMS messages

Ingress protection code (IP54 by default)

TECHNICAL DATA

Number of connected electric motors	1 motor	
Maximum current of the connected electric motor / Power	1 – 300A* / up to 132 kW	
Power supply voltage / Current	380V (+10 ...-15%) / 50 ± 2 Hz, 3 phase, N, PE	
Current and voltage control for each phase	yes	
Maximum number of connected sensors	10 sensors	
Adjustable output relays (N.O. / N.C. contacts)	2 relays	
Microcontroller power supply voltage	220V	
Electric motor start method	Direct-on-line	Soft start
Panel operating temperature range	+1 ... +40 °C	-40 ... +40 °C
Maximum relative humidity	80% at 25 °C	100% at 25 °C

* Panels for pumps with electric motors over 300 A are available by request

PANEL SWITCHING SIGNALS

Input signals and connected sensors		Output signals
«Dry run» sensors № 1 and № 2	24V	Two user-configurable relay for one of the following functions:
Upper and lower level sensors	24V	<ul style="list-style-type: none"> ■ «Panel operation» (power is ON and no alarm signals) ■ «Accident» ■ «Motor ON» ■ «External accident» ■ «External control» ■ «Upper level sensor triggered» ■ «Lower level sensor triggered» ■ «Dry run №1 sensor triggered» ■ «Dry run №2 sensor triggered» ■ «Pre-emergency situation» ■ «Burglar alarm sensor triggered»
Burglar alarm sensor	24V	
«External control» input	24V	
«External accident» input	24V	
«Automatic mode» signal	24V	
Analogous pressure / level sensor	4 - 20 mA/ 0 - 20 mA	
Temperature sensor PT100 / PTC	0 - 3.5 kOm	
Current sensors № 1, 2, 3	0 - 5 A	
RS-485 / RS-232	5V / 12V	Relay switching capacity: HO/H3 relay contacts ~250V, 1A

Single sensors with dry contacts, electric contact manometer of any design, float switches, conductometric (electrode) and other discrete sensors can be used as the level sensors including any analogous pressure sensors or liquid level sensors with unified current output of 4 – 20 (0 – 20) mA

SERIAL MODELS

Direct start panels	Soft start panels	Rated current, A**	Rated power, kW
HMS Control L4-25-IP54	HMS Control L4-25-P-IP54	1 - 25	1,1 - 9
HMS Control L4-40-IP54	HMS Control L4-40-P-IP54	20 - 40	11 - 17
HMS Control L4-60-IP54	HMS Control L4-60-P-IP54	35 - 60	18.5 - 22
HMS Control L4-80-IP54	HMS Control L4-80-P-IP54	55 - 80	27 - 37
HMS Control L4-100-IP54	HMS Control L4-100-P-IP54	75 - 100	45
HMS Control L4-120-IP54	HMS Control L4-120-P-IP54	95 - 120	50, 55
HMS Control L4-160-IP54	HMS Control L4-160-P-IP54	115 - 160	65, 75
HMS Control L4-200-IP54	HMS Control L4-200-P-IP54	155 - 200	90
HMS Control L4-250-IP54	HMS Control L4-250-P-IP54	195 - 250	110
HMS Control L4-300-IP54	HMS Control L4-300-P-IP54	240 - 300	132

** When selecting a model, an electric motor operating current shall be 5 – 10% less than a value set for a panel.

HMS Control G series

Panel for Drainage Pump

APPLICATION

HMS Control G series panel is intended to control and protect a single submersible pump of the GNOM series or an analogous one at water supply and sewage disposal facilities, industrial premises of thermal power plants, steel and mining, and other industries.

CONTROL

- Manual control of pump electric motor using buttons on the microcontroller panel
- Automatic start/stop of the pump motor by signals from the liquid level sensors (N.O. contact), as well as automatic motor switching off in case of short circuit or thermal overload



PANEL DESIGNATION

Designation example:

HMS Control G -2.5 - IP31

HMS Control G - XX - IP31

Panel series

Maximum current of connected electric motor, A

Ingress protection code

TECHNICAL DATA

Number of connected electric motors	1 motor
Maximum current of the connected electric motor / Power	13A / 5.5 kW
Power supply voltage / Current	380 V (+10 ...-15%) / 50 ± 2 Hz, 3 phase, N, PE
Control circuit rated voltage	220V
Panel operating temperature range	-40 ... +40 °C
Maximum relative humidity	80 %

PANEL SWITCHING SIGNALS

Input signals and connected sensors	
Number of connected sensors	1 sensor
Sensor type	Level sensor, N.O. contact
Sensor rated voltage	~ 15V

Output signals	
Relay type	With brake = make N.O. / N.C. contact
Switching ability	~250V, 1A
Signals	<ul style="list-style-type: none"> ■ «Panel operation» (power is On and no alarm signals) ■ «Accident» ■ «Motor ON /OFF»

SERIAL MODELS

Panel	Electric motor		Ingress protection code	Dimensions, mm	Weight, kg
	Power, kW*	Operating current, A			
HMS Control G - 2,5	1.1	1.6 - 2.5			8
HMS Control G - 4	2.2	2.5 - 4.0			8
HMS Control G - 8	3.0	5.5 - 8.0	IP31	300x210x150	11
HMS Control G - 10	4.0	7.0 - 10.0			16
HMS Control G - 13	5.5	9.0 - 13.0			25

* When selecting a model, an electric motor operating current shall be 5 – 10% less than a value set for a panel.

RECOMMENDATIONS

How to select a control panel

Selection is made in accordance with the motor's rated current. Please look for motor data in the relevant section, pump unit manual, name plate or contact the manufacturer.

For instance, nominal current for HMS Ciris 10-110 pump is 12A, therefore HMS Control L3-25 shall be selected for that pump.

In case you are unable to select pump or panel range presented in the catalog does not provide all requirements please fill out RFQ on page 67.

Control panels with soft start are recommended for pumps with 7.5 kW power and higher.

Soft start provides:

- pump operational life increase
- no current and torque peaks and negligible voltage dip during startup
- water hammer elimination in pipes and valves

How to select cable size to connect the pump

Cross-section is selected in accordance with ampacity ratings, max ambient temperature and max allowable voltage drop of 2% from nominal value. Please use the table on page 31.

Attention!

Different pump units with the same motor have different power consumption, therefore the cable length and cross-section are to be selected in accordance with nominal current value to avoid oversizing.

If operating current is 10% lower than nominal, the cable length shall be 10% longer than given in the table.

Example

Cable sizing for HMS CIRIS 8-25-125 pump with 13 kW power and 33 A nominal current and 160 m of required length.

In the table below, vertical column, in the corresponding row you would find 175 of cable length with 25 mm of cross section. Therefore, at the required cable length of 160 m the cable cross-section will be 25 mm.

Correct connection to power supply is determined by the pump rotation direction. At the closed valve the manometer shows two different pressure values. Higher value points to the correct rotation direction. For submersible pumps water lift, in the normal mode, should be indicated in 1-2 minutes after start.

Connection of any two-phase power wires has to be swapped around in case of wrong rotation direction.

CABLE SELECTION

Motor power, kW	Maximal rated current, A	Cable cross-section, mm ²														
		1.5	2.5	4	6	10	16	25	35	50	70	95	120	150	185	240
Maximal cable length, subject to the 2% voltage drop																
1	4.2	119	198	315												
1.5	5.8	86	143	228	339											
2.2	8	62	104	165	246	403										
3	11	45	75	120	179	293	457									
4	12	38	64	102	153	251	391									
5.5	16	24	41	66	98	162	252	391								
6.3	18	22	36	58	87	144	224	347	474							
7.5	20		32	52	78	128	200	310	423							
11	25			41	61	101	158	245	336							
	30			34	51	84	131	204	280	386						
13	35				44	72	113	175	240	331	418					
15	37				41	68	105	164	225	311	392					
17	38				41	68	106	164	224	309	393					
18.5	45					56	87	136	186	257	325	444				
	49					51	80	125	171	236	299	408	491			
22	55						71	110	151	209	264	362	436			
	60						65	101	138	191	242	332	400	473		
30	67						58	90	124	171	216	297	358	424	492	
32	72						54	84	115	159	201	276	333	394	458	
37	83							72	99	137	173	239	288	342	398	474
45	108								77	106	134	184	222	263	305	363
55	120									95	119	165	199	236	275	328
65	130									88	111	153	184	218	253	301
	135									85	107	147	177	210	244	290
75	146										98	136	164	194	226	269
	155										92	128	154	183	213	253
90	165										87	120	145	172	200	238
	190											104	126	149	173	207
110	250												96	113	131	155
	270													105	121	143
130	285													99	115	136
Allowable continuous current, A		19	25	35	42	55	75	95	120	145	180	220	260	305	350	-



HMS Group – a leading international holding, integrating major machine building and engineering companies. Scope of HMS Group's activities covers oil & gas industry, nuclear and thermal energy, water supply & sewage disposal, and other industries.

- Company foundation: 1993
- Production facilities in Russia, CIS, and Germany
- Own engineering institutes and R&D centers
- 14,500 professional employees
- Considerable experience in integrated projects for various industries
- Branch and representative offices in Europe, CIS, Middle East and North Africa

HMS Group offers contemporary, reliable and energy-efficient solutions based on pumps and compressors for various industries: from equipment engineering, development and production to complex procurement and integrated turn-key projects.

ENGINEERING

Modern R&D base with years of experience is represented by the own engineering centers with centralized control, located in Russia and CIS.

The up-to-date 3D-modeling and CAD methods are applied for development new and modernization of existing equipment to ensure high efficiency and performance.

HMS Group engineers cooperate closely with clients' technical divisions, participating in equipment specifications development and adapting new technical solutions to clients' requirements.

MANUFACTURING

All critically important units and components are produced at the HMS Group plants, equipped with modern CNC machinery from the leading manufacturers.

The casing parts and impellers of pumps and compressors are manufactured at the own foundries, equipped with new efficient molding lines and induction furnaces.

TESTING

HMS Group plants are equipped with unique equipment for mechanical, thermal and research tests of the pump and compressor units under real operation conditions.

The tests are conducted in accordance with international standards, or by special methods developed jointly with the customer. Automated measurement systems ensure high accuracy of test results.

SERVICE

The HMS Group customers are provided with a full range of related services for pump and compressor systems including installation & commissioning supervision, routine maintenance, repair and overhaul, spare parts supply, integrated retrofit, extended engineering and technical support.

STANDARDS & QUALITY

The design and materials of manufactured pumps and compressors meet the requirements of the main international standards ISO, API, DIN EN, AISI, ANSI, NEMA.

REQUEST FOR QUOTATION (ORDER FORM)

The order form shall be completed in full to be accepted for consideration by the HMS Group

1. Customer: _____

Address: _____

Phone: _____ Fax: _____ E-mail: _____

Pump type: _____ Quantity: _____ Estimated annual q-ty required: _____

Similar to model: _____ by (manufacturer): _____

Filled in by (Name): _____ Position: _____ Date: _____

2. Pump installation data

Installed in a new well Installed into a well in operation

Well #: _____ Well diameter: _____ m Well depth: _____ m Pump installation dept: _____ m

Static level: _____ m Dynamic level: _____ m Lowering: _____ m Output: _____ m³/h

Relative output: _____ m³/h

3. Pumped liquid parameters

Temperature: _____ °C Turbidity: _____ mg/L Total dissolved solids: _____ mg/L pH: _____

Alkalinity: _____ mg/L Hardness (total): _____ mg/L Iron (total): _____ mg/L

4. Operation

Water supplies to (select one of two values): Tank Water supply system

Pump switch-on pressure: _____ kgf/cm² Pump switch-off pressure: _____ kgf/cm²

Capacity: _____ m³ Well head pressure: _____ kgf/cm²

5. Power and control panel

Control panel required Control type: By pressure By water level

Motor protection options:	<input type="checkbox"/> By min/max voltage	<input type="checkbox"/> By number of starts limit	<input type="checkbox"/> By current
	<input type="checkbox"/> Phase rotation	<input type="checkbox"/> Phase failure	<input type="checkbox"/> Phase imbalance
	<input type="checkbox"/> Level sensor		
	<input type="checkbox"/> Soft start required	<input type="checkbox"/> Variable frequency drive required	

Other requirements (point if any): _____

HMS Group Moscow
International Sales Department

Phone: + 7 (495) 730 6601
E-mail: export@hms.ru
www.grouphms.com
www.hms.biz



The information contained in this catalogue is intended for reference purposes only and basic selection of products manufactured by HMS Group and its affiliated companies. Full and detailed technical information regarding specifics products of HMS Group or its affiliated companies is available in relevant manufacturer's technical manuals. HMS Group reserves the right to alter the products without prior notice and is not responsible for possible errors and misprints in catalogs, brochures and other printed or published materials in any form.